

CrystaLatch™ Dual-Stage 2x2 Fiber Optic Switch

(SM, PM, Unidirectional, Bidirectional)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

BUY NOW



Features

- High Speed
- Non-Mechanical
- High Reliability
- Fail-Safe Latching
- Low Insertion Loss
- Rugged
- Compact
- Cost Effective
- Direct Low Voltage Drive

Applications

- Optical Sensing
- Optical Signal Routing
- Instrumentation

The CL Series 2x2 Solid State Fiber Optical Switch connects optical channels by redirecting an incoming optical signal into a selected output fiber. This is achieved using patented non-movement configurations and activated via an electrical control signal. The latching operation preserves the selected optical path after removing the drive signal. All solid-state fiberoptic switches feature low insertion loss, high extinction ratio, high channel isolation, and extremely high reliability. It is designed to meet the most demanding switching requirements of continuous operation without failure, longevity, operation under shock/vibration environment and large temperature variations, and fast response time.

The switch also has build-in Circulator and isolator functions. An electronic driver is available for this series of switches.

The magneto-optical crystals used in the CL switches have no fatigue nor drift effect.

Specifications

Parameter	Min	Typical	Max	Unit
Operation Wavelength ^[1]	1520	1550	1580	nm
	1295	1310	1325	nm
Insertion Loss ^[2]		0.7	1.2	dB
Cross Talk	Bidirectional Series Switch	35	50	dB
	Unidirectional Series Switch	37	50	dB
PDL (SM Series Switch only)		0.1	0.2	dB
Extinction Ratio (PM Series Switch only)	18	25		dB
Return Loss	50	55		dB
Polarization Mode Dispersion		0.1	0.2	ps
Optical Switching Speed (rise, fall)	5		10	μs
Repetition Rate		2K		Hz
Durability	10 ¹⁵			cycle
Operating Temperature	-5		70	°C
Storage Temperature	-40		85	°C
Optical Power Handling		200	300	mW
Fiber Type	SMF-28, Panda PM, or equivalent			

Notes:

- [1]. Agiltron can achieve same SPEC at L band
- [2]. Measured without connectors

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 06/26/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

CrystaLatch™ Dual-Stage 2x2 Fiber Optic Switch


(SM, PM, Unidirectional, Bidirectional)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

Mechanical Dimensions (Unit: mm)

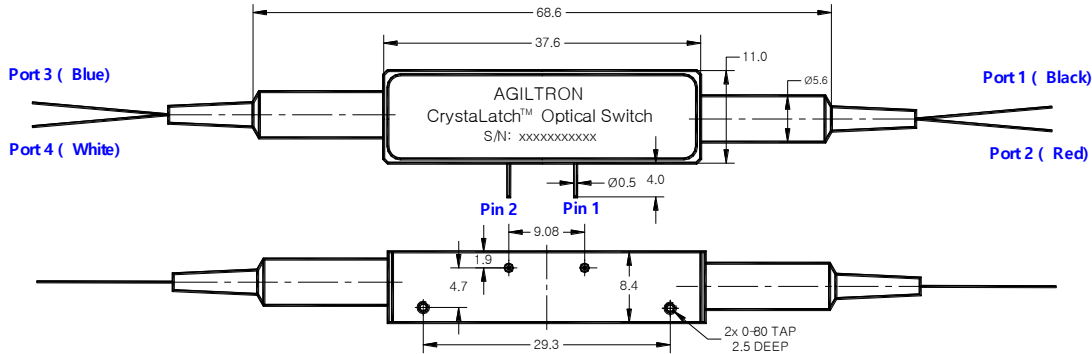

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Driving Information

The switch is actuated by applying a voltage pulse. Applying one polarity pulse, one light path will be connected and latched to the position. Applying a reversed polarity pulse, another light path will be connected and latched to the position after pulse removed.

Parameter	Minimum	Typical	Maximum	Unit
Drive Voltage	4.5	5.0	5.5 ^[1]	V
Drive Current	110	140	195	mA
Pulse Duration	0.2	0.3	0.5	ms

[1]. Over this value will damage the device

Driving kit with USB and TTL interfaces and Windows™ GUI is available. We also offer RS232 interface as an option – please contact Agiltron sales.

Bidirectional Series Switch Driving Table

Optical Path	Pin 1	Pin 2
Port 1 → 3 (or Port 3 → 1) Port 2 → 4 (or Port 1 → 3)	0	5V Pulse
Port 1 → 4 (or Port 4 → 1) Port 2 → 3 (or Port 3 → 2)	5V Pulse	0

Other Series Switch Driving Table

Optical Path	Pin 1	Pin 2
Port 1 → 3, Port 2 → 4	0	5V Pulse
Port 1 → 4, Port 2 → 3	5V Pulse	0

Note:

The driving voltage value is transient voltage with a full load. The driver circuitry needs to provide sufficient current (~300mA) during the switching. Inside the switch core is an electromagnet with a residual magnetic field. The residual magnetic field will be established when an electrical current flows in one direction through the coil for a sufficiently long period. The residual magnetic field latches the switch state even without applying a voltage (the current flow stopped). Flowing a current in the opposite direction for a sufficient time changes the switch stage by establishing a reversal magnetic field. The coil is forgiving to the driver unless one burns it by applying a higher voltage or a current for too long (day). The switch can also be operated at high repetition rates of kHz, where the residual magnetic field may not be fully established.

CrystaLatch™ Dual-Stage 2x2 Fiber Optic Switch


(SM, PM, Unidirectional, Bidirectional)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)




DATASHEET

Typical Switching Response

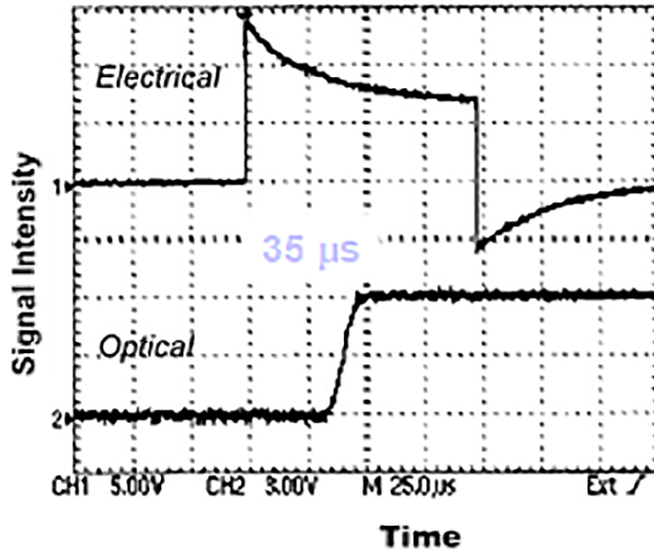

Typical Loss Change of 1x2 vs Switching Numbers

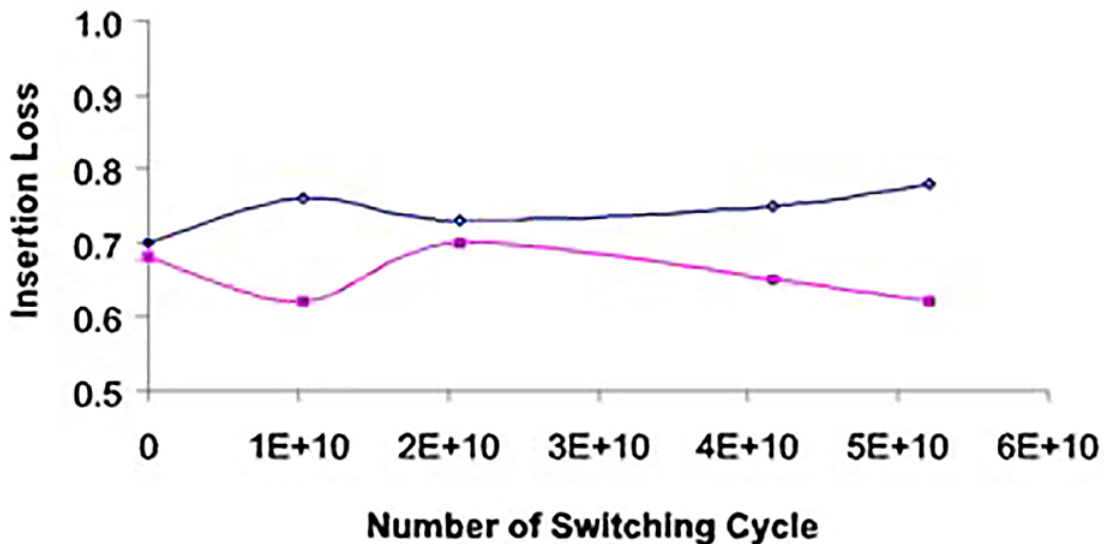

CrystaLatch™ Dual-Stage 2x2 Fiber Optic Switch


(SM, PM, Unidirectional, Bidirectional)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

Functional Diagram

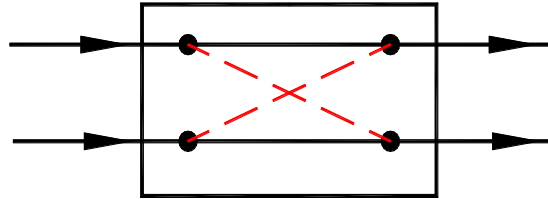

CL 2x2 Dual Stage Switch

Ordering Information

Prefix	Type	Wavelength	Switch	Package	Fiber Type	Fiber Cover	Fiber Length	Connector ^[5]
CLSW- ^[1] CLPM- ^[2] CLBD- ^[3] CLPB- ^[4]	2x2 = 22	1310 = 3 1550 = 5 Special = 0	Dual Stage = 2	Standard = 1 Special = 0	SMF-28 = 1 PM 1550 = B Special = 0	Bare fiber = 1 900 um tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = A LC/UPC = U Special = 0

[1]. **CLSW**: CrystaLatch Dual Stage SM **SWITCH**.

[2]. **CLPM**: CrystaLatch Dual Stage **PM** Switch.

[3]. **CLBD**: CrystaLatch Dual Stage **BIDIRECTIONAL** Switch.

[4]. **CLPB**: CrystaLatch Dual Stage **PM Bidirectional** Switch.

[5]. There isn't any connector in high power switches. Please contact us for high power connectors.

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.

CrystaLatch™ Dual-Stage 2x2 Fiber Optic Switch

(SM, PM, Unidirectional, Bidirectional)


(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

Driver Design Example for 1x4

A recommended +5VDC powered driving circuit is provided. The resistor network R1~R8 is to suppress the driving signal's voltage level to meet the "switch voltage" requirements. In specific applications, users can use lower voltage to eliminate the R1~R8. The Q1~Q8 is the control signal from either a function generator or a microcontroller general purpose I/O. The Q1~Q8 switching speed must meet the specific MOSFET switching requirement and CL 1x4 Switch specific requirement. Usually, the control signal speed is $\leq 2\text{kHz}$.

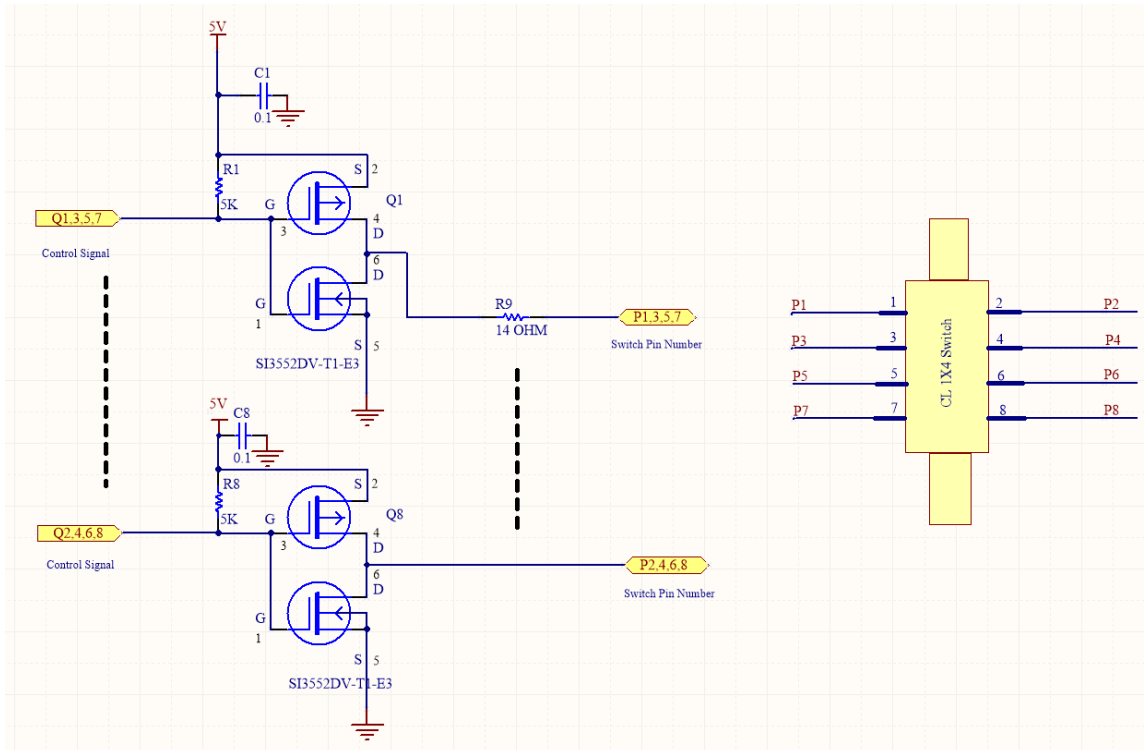

Usually, a clean power supply source will be sufficient. However, decoupling capacitors for the transistor supply rail are recommended depending on different applications. Minimum the current loop on the switching circuits will minimize the switching noise. For other layout recommendations, please refer to books or application notes from the IC manufacturer.