

Dual Stage 850/980/1060 Optical Isolator

(patents pending)

Product Description

The OI Series TGG based 850/980/1060 nm optical Isolator is a passive device that guides lights at 850/980/1060 nm in the normal direction while minimizing back reflection and back scattering in the reverse direction for any state of polarization. With Agiltron's proprietary magnetic-optics technology and proven advanced micro optics design, it features low insertion loss, super high isolation, broad operation wavelength, compact structure, high power handling, and high stability. We offer a full range of polarization independent, polarization maintain, and multimode versions. Agiltron also provides customized design to meet special applications.



Performance Specifications

OI Series TGG based PI Isolator		Min	Typical	Max	Unit
Operation Wavelength	850	840		860	nm
	980*	970		990	
	1060	1050		1070	
Insertion Loss ¹			1.1	1.5	dB
Wavelength Dependent Loss				0.2	dB
Isolation	850/1060	40	45		dB
Polarization Dependent Loss			0.15	0.25	dB
Polarization Mode Dispersion				0.2	ps
Return Loss		50			dB
Optical Power Handling			300		mW
Storage Temperature		-10		60	°C
Fiber Type		See order information			
Package Dimension*		(L)106x(W)34x(H)33			mm

1. Excluding connectors

*Package dimension for reference only

Features


- Low Insertion Loss
- High Isolation
- Low PDL
- High Stability
- Broad Wavelength Coverage
- Cost Effective

Applications


- Optical Fiber Amplifier
- Pump Laser Source
- Fiber Optic Sensor
- Test and Measurement
- Instrumentation

TGG Based Polarization Independent Two Stage 850/980/1060 Optical Isolator

Optical Performance

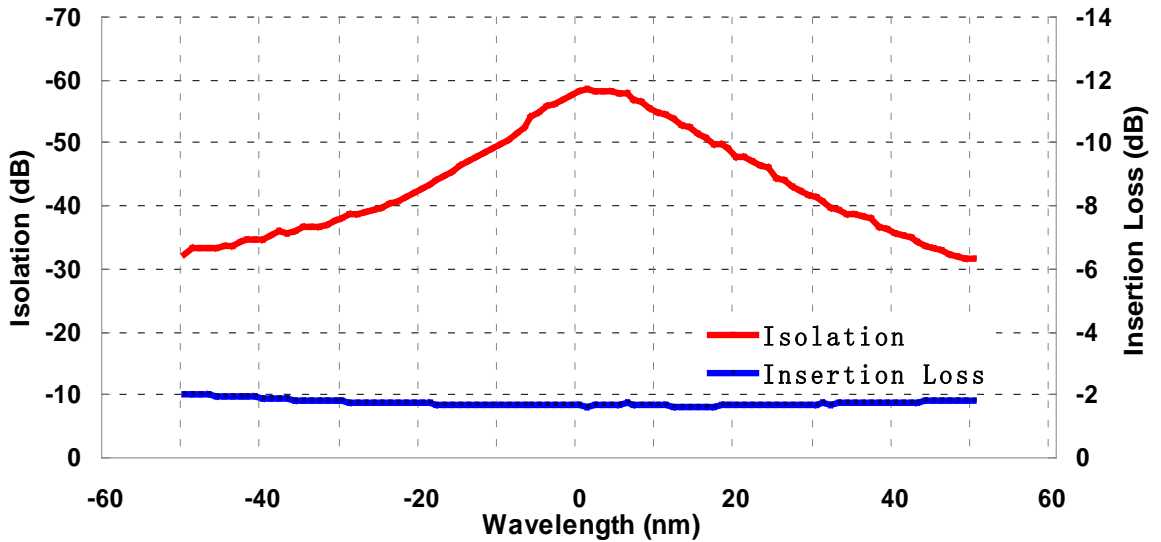


IL/ISO VS. Temp @ Center Wavelength

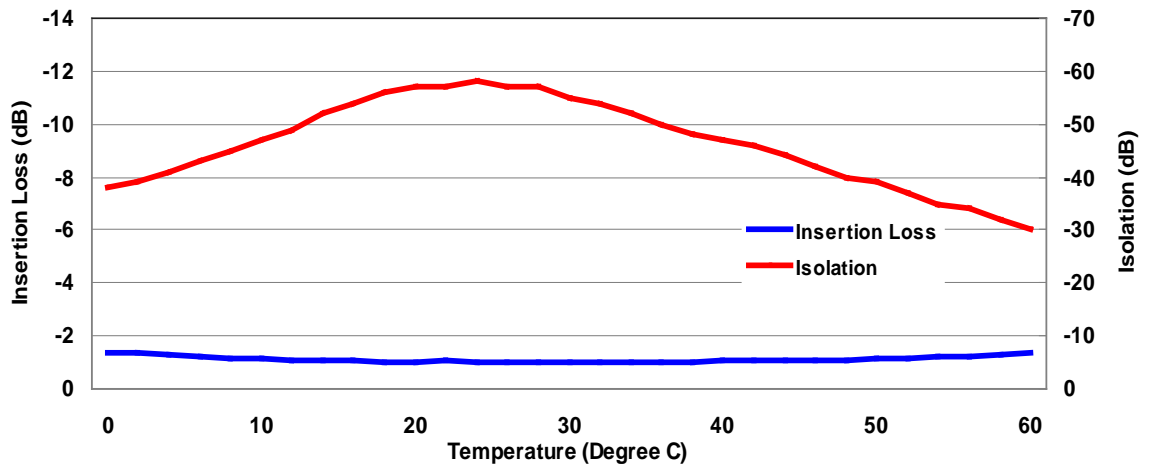

Terbium Gallium Garnet Based Polarization Independent 850/980/1060 Optical Isolator

Mechanical Dimensions: Standard (Mini/850) Unit: mm

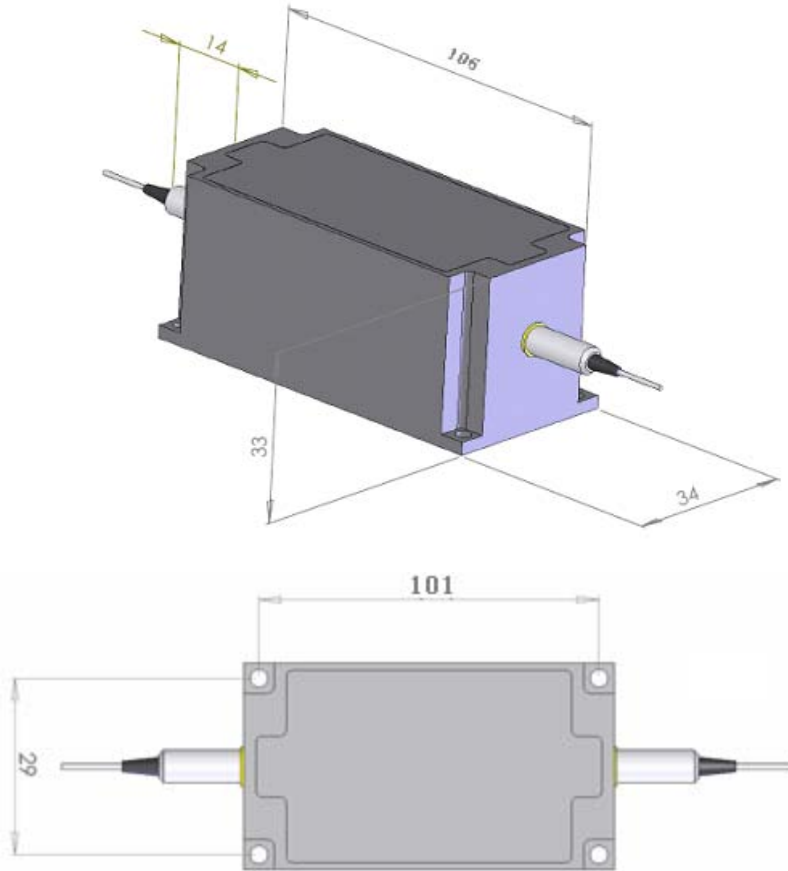

Ordering Information

OIST-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Type	Wavelength	Grade	Package	Fiber Type	Fiber Length	Connector			
Polarization Independent=11 Special=10	1060=1 850=8 980=9 Special=0	Standard=1 Special=0	Standard=1 Mini Size (980/1060) =2 Special=0	HI1060=2 HI780=7 HI980=9 Special=0	Bare fiber=1 900um Loose tube=3 Special=0	0.25M=1 0.5M=2 1.0M=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Special=0		