

Fabry-Perot Fiber Optic Filter

down to 0.1nm peak width, up to 100nm tuning range, kHz speed, 1060, 1310, 1550nm



DATASHEET

[Return to the Webpage](#)



The FPDF Fiber Fabry-Perot Tunable Filter features a narrow linewidth of ~0.1nm, a low loss of <math><0.3\text{dB}</math>, wide tuning range of ~100nm. It is based on a fiber tip gap etalon cavity configuration that is movable by a piezoelectric actuator. We offer three centered wavelengths of 1060nm, 1310nm, and 1550nm. The device is vibration-insensitive. The performance of FPDF is a trade-off between the parameters; for example, if select 0.1nm linewidth, then the tuning range is only 10nm. The FPDF is a cost-effective solution for wavelength scanning applications with a speed up to 1kHz. The device is drifting that requires feedback control to stabilize. We offer a full-function controller with a user-friendly GUI and interfaces of USB or RS232.

This Fabry-Perot device does not block the wavelength bands beyond the specific wavelength band. Our grating-based tunable filters block the off-bands.

Features

- Narrow Line Width
- Wide Tune Range
- Low IL and PDL
- Fast Tuning Speed
- USB, RS232, I2C Control Interfaces
- Gaussian-Shaped Passband

Applications

- FBG Sensing Interrogation
- Wavelength Scanning

Specifications

Parameter	Min	Typical	Max	Unit
Center Wavelength	1060	1310	1550	nm
Tuning Range ^[1]	10	50	100	nm
Slow Tuning Speed	-	-	5	kHz
Fast Tuning Speed	-	-	70	kHz
Insertion Loss ^[2]	2.5	3	4	dB
Bandwidth @-3dB or FWHM ^[3]	0.01	0.08	1	nm
Off-Band Suppression	25	30	-	dB
PDL	-	0.15	0.35	dB
PMD	-	-	0.2	Ps
Return Loss	40	-	-	dB
Optical Power Handling	-	50	100	mW
Driving Voltage	-	20	70	V
Capacitance	-	-	3	μF
Operating Temperature	-5	20	70	$^{\circ}\text{C}$
Storage Temperature	-40	-	85	$^{\circ}\text{C}$
Weight	-	60	100	G
Optional Thermistor (25 $^{\circ}\text{C}$, B \sim 3950)	-	100	-	k Ω

Notes:

- [1]. It is also called Free Spectral Range
- [2]. It is defined as the total light coupled out over the filter's spectral passing band. Measured using a broadband light source with integration of the transmission peak. Extra loss can occur if the laser source does not match the filter profile. A special filter can be made to match the application. The smaller the fiber core, the higher the loss. Excluding connector loss
- [3]. Bandwidth tolerance are $\pm 20\%$

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 11/11/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


Fabry-Perot Fiber Optic Filter



down to 0.1nm peak width, up to 100nm tuning range, kHz speed, 1060, 1310, 1550nm


DATASHEET

Mechanical Dimension (60x25x14mm)

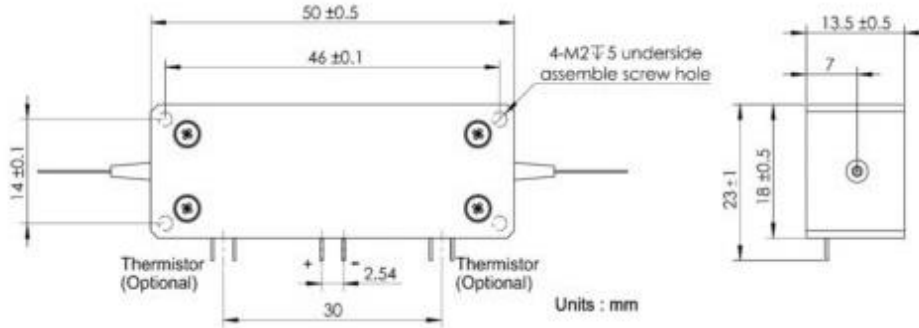


*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Typical Transmission Curve

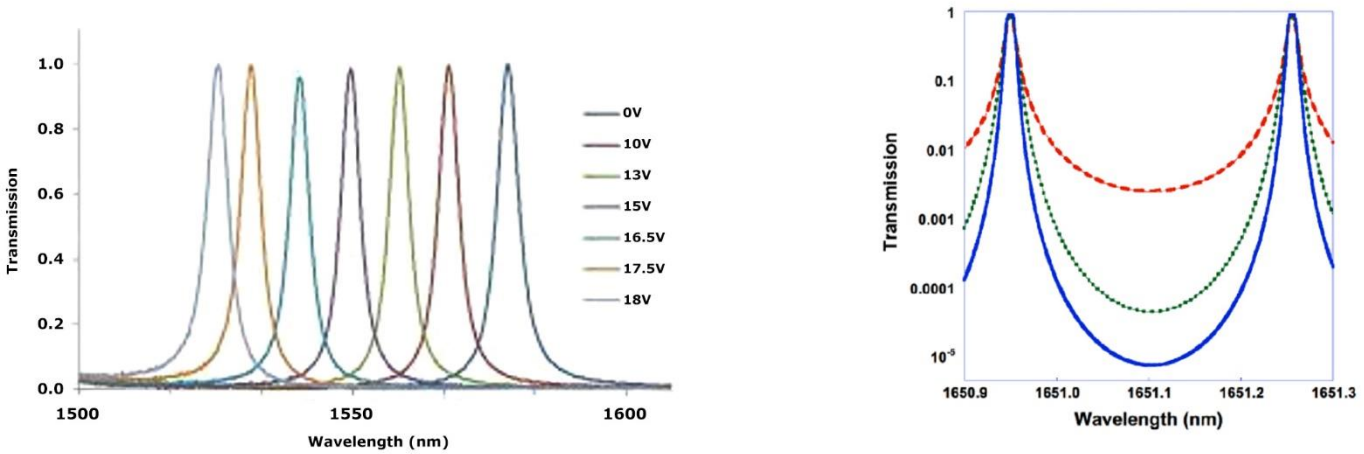

Wavelength Tuning vs Voltage

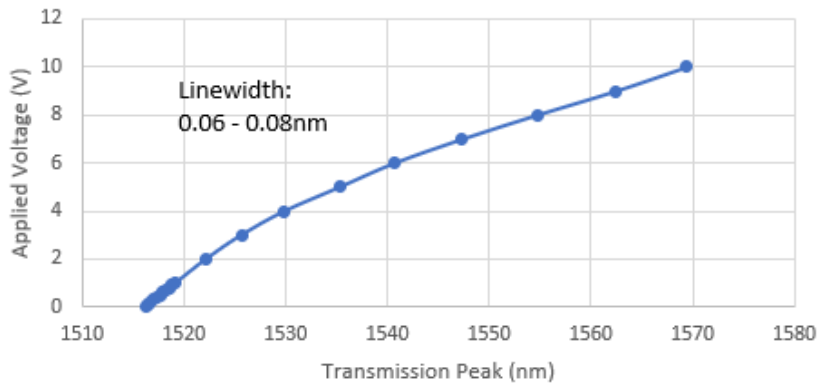


Fabry-Perot Fiber Optic Filter

down to 0.1nm peak width, up to 100nm tuning range, kHz speed, 1060, 1310, 1550nm



DATASHEET

Bandwidth Definition

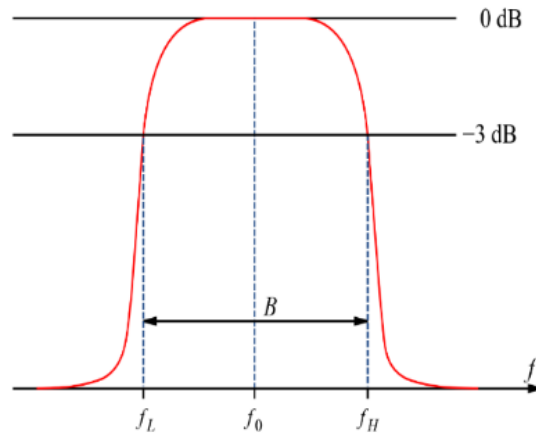

Ordering Information

Prefix	Center Wavelength	Bandwidth *	Tuning Range **	Controller	Fiber Type	Fiber Cover	Fiber Length	Connector	Thermistor
FPTF-	1550 = 5 1310 = 3 1060 = 1 Special = 0	0.08nm = 1 0.04nm = 4 0.02nm = 3	100nm = 1 120nm = 2 160nm = 3 Special = 0	Non = 1 Yes = B	SMF-28 = 1 HI1060 = 2 Special = 0	0.9mm tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 Special = 0	No = 1 Yes = 2

* Bandwidth is also related to finesse of the cavity

** Tuning range is also the Free Space Range between the two adjacent peaks

Red is special order

Controllers

Piezoelectric devices have material related temperature dependence and hysteresis, resulting in drift and poor repeatability. The mechanical devices also have intrinsic resonance frequencies; operation should be below these frequencies. The controller can stabilize and lock the peak positions as well as perform scanning. It needs to follow a complex setup/tuning procedure. Scan mode is used primarily for sweeping the filter through a range of wavelengths for applications such as (un-calibrated) optical spectrum analysis and WDM channel monitoring. Locked mode locks onto a particular narrow line source and performs a scan with tuning stability by compensating electrical, thermal, and mechanical slow variations. It uses an internal photodetector that taps a small portion of the input light to form a closed-loop feedback control with a small amplitude dither at about 2kHz.

\$2450

Fabry-Perot Fiber Optic Filter

down to 0.1nm peak width, up to 100nm tuning range, kHz speed, 1060, 1310, 1550nm



DATASHEET

Operation Manual

1. Only available along with the product shipment.

How to test the insertion loss of a tunable optical filter

The filter only works in a specific range. Beyond this range, extra peaks may show. These peaks can be blocked with special order. Please follow these instructions to do an optical insertion loss test:

1. Connect a broadband fiber-coupled laser source to OSA, sweep one time over the specified range of the tunable filter, and then fix the curve in Trace A as a reference.
2. Connect the broadband laser source to the fiberoptic tunable filter fiber as input, then connect the other fiber port of the tunable filter as the output to the OSA.
3. Set OSA Trace B as 'write,' Trace C as 'Calculate: B-A.' Auto sweep Trace C from the specific range. Tune the micrometer to shift the peak at a different wavelength. Use 'Peak search' to record IL at a different wavelength."

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.