

# MEMS 1x3 Fiber Optical Switch/VOA


(Bidirectional, SM, PM)

(Protected by U.S. pending patents)



DATASHEET

[Return to the Webpage](#)

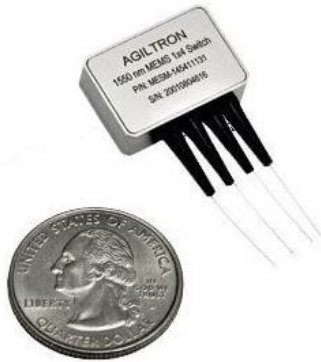

The MEMS 1x3 Series Fiber Optical Switch uses a patented thermal activated micro-mirror, moving-in and -out optical paths at a 45° angle to direct incoming light into a selected output fiber without hitting other ports, by which the degradation of multi-fiber collimator due to the laser steering in the long period is entirely eliminated. It uniquely offers, unprecedented high stability over a wide temperature range, compact size, exceptionally long operation life, insensitive to moisture and ESD, no short and long-term drifts, and high-reliability for over 25 years of continuous operation.

The device can also simultaneously function as a variable attenuator in which the output light intensity is continuously controlled. The switches are Telcordia GR1221 qualified. The switch is conveniently controlled by directly applying a voltage to each mirror actuator.

## Applications

- Channel Blocking
- Add/Drop
- System Monitoring
- Instrumentation

## Features

- Hitless
- High Reliability
- Compact Size
- ESD Tolerance

## Specifications

| Parameter                        |                            | Min                     | Typical | Max                | Unit  |
|----------------------------------|----------------------------|-------------------------|---------|--------------------|-------|
| Operation Wavelength             | Single Band                | 1310±40 or 1510±40      |         |                    | nm    |
|                                  | Dual Band                  | 1310±40 or 1510±40      |         |                    |       |
|                                  | Broad Band                 | 1260~1620               |         |                    |       |
| Insertion Loss <sup>[1]</sup>    | Single Band <sup>[2]</sup> |                         | 0.6     | 1.0                | dB    |
|                                  | Dual Band <sup>[2]</sup>   |                         | 0.7     | 1.2                |       |
| Wavelength Dependent Loss        |                            |                         | 0.15    | 0.3 <sup>[2]</sup> | dB    |
| Polarization Dependent Loss (SM) |                            |                         |         | 0.1                | dB    |
| Extinction Ratio (PM)            |                            | 18                      |         |                    | dB    |
| Cross Talk <sup>[1]</sup>        |                            | 50                      |         |                    | dB    |
| Return Loss <sup>[1]</sup>       |                            | 50                      |         |                    | W     |
| Switching Time                   |                            |                         | 10      |                    | ms    |
| Repeatability                    |                            |                         |         | ± 0.05             | dB    |
| Repetition Rate                  |                            |                         | 10      |                    | Hz    |
| Durability                       |                            | 10 <sup>10</sup>        |         |                    | cycle |
| Switching Type                   |                            | Non-Latching            |         |                    |       |
| Operating Temperature            |                            | -5                      |         | 70                 | °C    |
|                                  |                            | -40                     |         | 85                 | °C    |
| Storage Temperature              |                            | -40                     |         | 85                 | °C    |
| Optical Power Handling (CW)      |                            |                         | 300     | 500                | mW    |
| Fiber Type                       | SM Switch                  | SMF-28 or equivalent    |         |                    |       |
|                                  | PM Switch                  | Panda 250 or equivalent |         |                    |       |

**Notes:**

- [1]. Exclude connectors.
- [2]. Dual and Broad band.


Rev 09/25/24

# MEMS 1x3 Fiber Optic Switch

(Bidirectional, SM, PM)

## DATASHEET

### Mechanical Footprint Dimensions (mm)

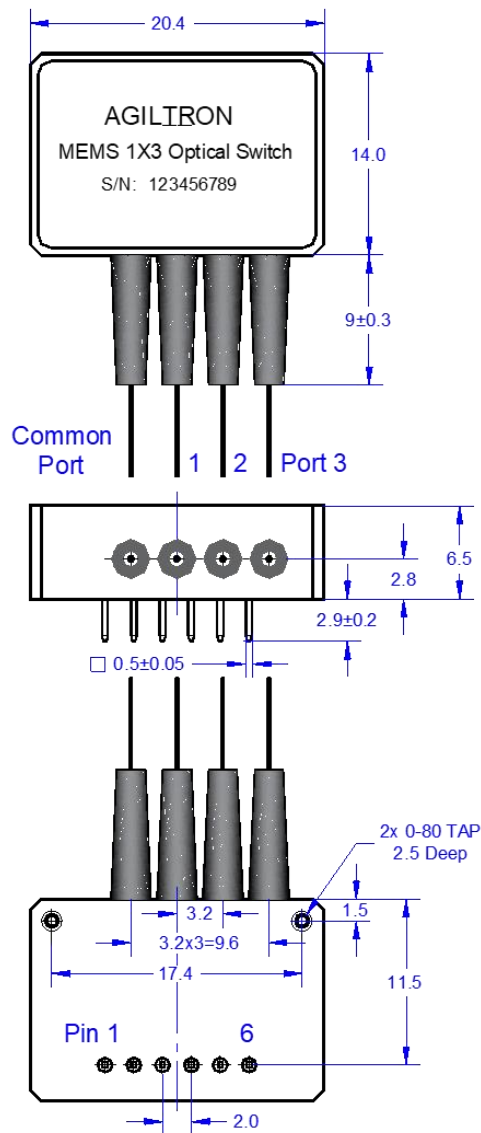

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### Electronic Control Requirements

| Optical Path    | Pin Number |   |    |    |   |    |
|-----------------|------------|---|----|----|---|----|
|                 | 1          | 2 | 3  | 4  | 5 | 6  |
| Common ↔ Port 1 | +V         | 0 | 0  | 0  | 0 | NC |
| Common ↔ Port 2 | 0          |   | +V | 0  |   |    |
| Common ↔ Port 3 | 0          |   | 0  | +V |   |    |

[1]. +V: 4.0 - 4.4VDC, typically 4.2VDC.

[2]. Each MEMS Chip Power Consumption is about 170 mW.


[3]. NC: No electronic Connection.

# MEMS 1x3 Fiber Optic Switch

(Bidirectional, SM, PM)

## DATASHEET

### Functional Diagram

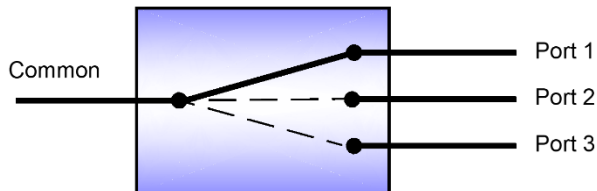

MEMS 1x3 Series Switch

**Note:**


- 1) Standard version: None of ports is connected optically without voltage. In addition of On-Off operation, the attenuation can be realized in each port. When the applied voltage is increased, IL of the relevant port will be reduced from IL in max (>50dB) to IL in min (<1.0dB), realizing VOA function.
- 2) Default version: Port #4 is connected as default without voltage. VOA function isn't available any more in all ports.

### Ordering Information

| Prefix | Type                     | Wavelength  | Switch           | Package                     | Fiber Type  | Fiber Cover                                      | Fiber Length                                     | Connector  |
|--------|--------------------------|---|------------------|-----------------------------|---|--|--|--|
| MESM-  | 1x3 = 13<br>Special = 00 | 1260~1620 = B<br>1060 = 1<br>1310 = 3<br>1550 = 5<br>780 = 7<br>850 = 8<br>1310/1550 = 9<br>Special = 0 | Non-Latching = 2 | One Side = S<br>Special = 0 | SMF-28 = 1<br>PM1550 = B<br>PM1400 = C<br>PM1310 = D<br>PM980 = E<br>PM850 = F<br>Special = 0 | Bare fiber = 1<br>900 um tube = 3<br>Special = 0 | 0.25m = 1<br>0.5m = 2<br>1.0m = 3<br>Special = 0 | None = 1<br>FC/PC = 2<br>FC/APC = 3<br>SC/PC = 4<br>SC/APC = 5<br>LC/PC = 7<br>Duplex LC/PC = 8<br>Special = 0 |

### Recommendation Control Circuit

In order to minimize the overshooting and oscillation in optics, the following circuit is recommended for driving signal on PIN.

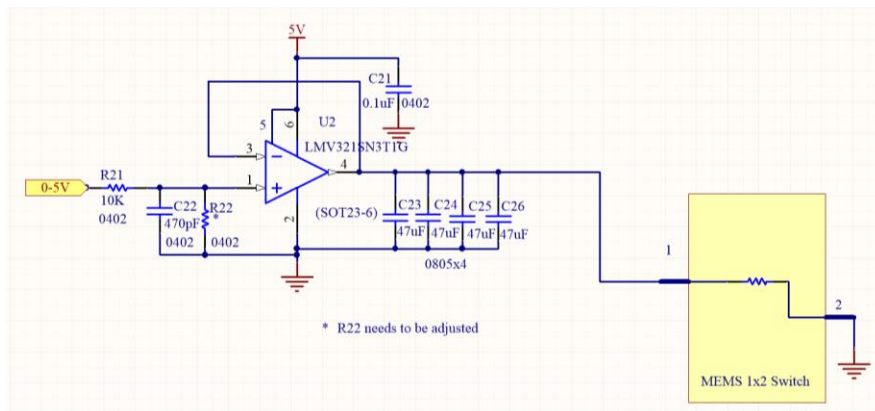

# MEMS 1x3 Fiber Optic Switch

(Bidirectional, SM, PM)

## DATASHEET

### Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

### Fiber Cleanliness


Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

### Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.


## 10<sup>9</sup> Switching Cycle Test

We have tested MEMS 1x2 switch at the resonant frequency ~300Hz for more than 40 days, as shown in the attachment, which corresponding over 10<sup>9</sup> switching cycles. The measurements show little changes in Insertion loss, Cross Talk, Return loss ect, all parameters are within our specs.

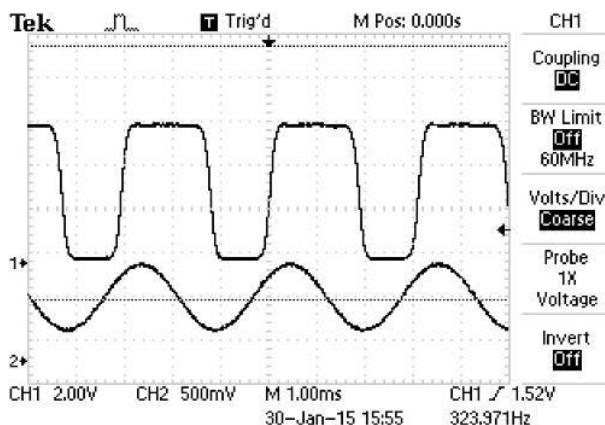

## VOA Capability on Port

The attenuation in each channel can be realized in this MEMS switch without scarifying the switch performances. The attenuation is realized by the applied voltage between 0 and 4V, as shown in the following figure (typical).

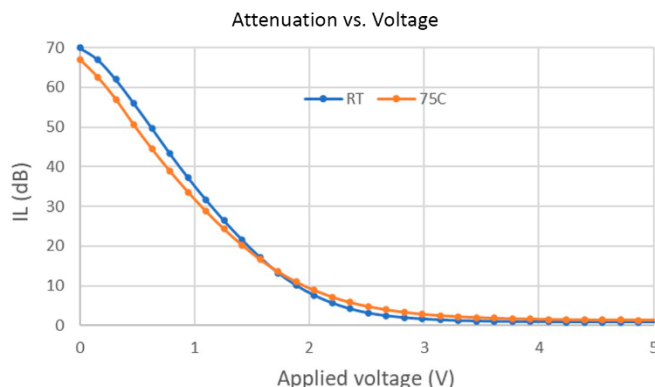


# MEMS 1x3 Fiber Optic Switch

(Bidirectional, SM, PM)


## DATASHEET

### Typical Insertion Loss vs Wavelength (1240-1630nm)

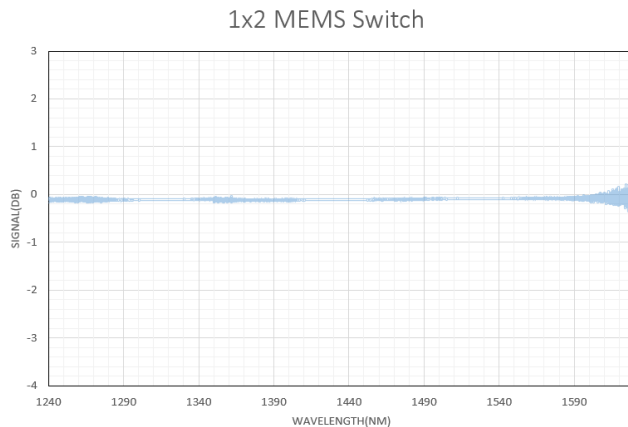

### Demo Driver

USB RS232/GUI, Pushbutton/LED Channel Indicators  
Applicable to Non-latching MEMS-1x3, 1x4, 1x8, 1x12 and 1x16 (\$255)

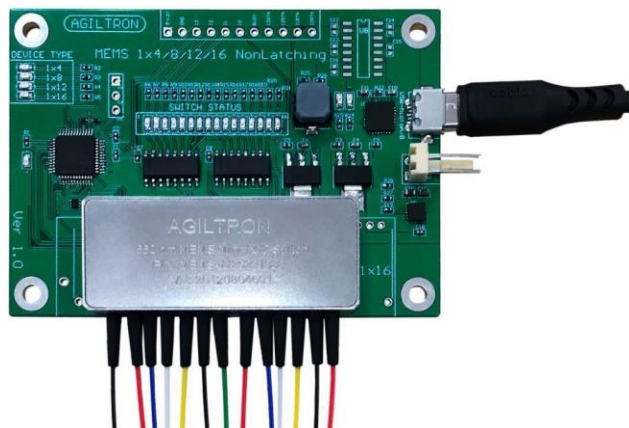

MEMS-1x12 on Demo driver