

Electrically Tunable Fiber Optic Filter

(wide range)

(patent pending)



DATASHEET

[Return to the Webpage](#)



Features

- Compact and Low Cost
- Wide Tune Range
- Wide Wavelength Coverage
- Low IL and PDL

Applications

- DWDM networks
- Fiber Sensing
- ASE control
- Tunable Fiber Laser

Based on a proprietary thin film cavity filter technology and device configuration, we uniquely offers a cost effective Fiber Optic Tunable Filters with wide spectral range up to 300 nm and with low loss. The wavelength tuning is actuated by driving a build-in precise stepper motor through interface of USB or RS232. Custom specific range is available.

Agiltron's unique high reliability and low insertion loss design presents a most cost-effective solution for OEM applications from fiber optic networks to fiber sensing interrogation.

These grating-based tunable filters block the off-bands.

Specifications

Parameter		Min	Typical	Max	Unit
Center Wavelength		350		2400	nm
Tuning Range ^[1]		-	± 60	± 150	nm
Tuning Resolution		-	0.1	-	nm
Tuning Speed		-	21	-	nm/s
Insertion Loss ^[2]		1.5	2	3.5	dB
Bandwidth @-3dB		-	1	1.2	nm
Bandwidth @-20dB		-	10	-	nm
Off-Band Suppression		-	30	-	dB
PDL (SM fiber only)		-	0.15	0.35	dB
PMD (SM fiber only)		-	-	0.5	ps
Extinction Ratio (PM fiber only)		18	23	-	dB
Return Loss		40	-	-	dB
Optical Power Handling (CW)	Standard version	-	0.5		W
	High power version		10		W
Operating Temperature		0	20	60	°C
Storage Temperature		-10	-	70	°C

Notes:

[1]. Longer the wavelength, larger the tuning range

[2]. It is defined as the total light coupled out over the filter's spectral passing band. Measured using a broadband light source with integration of the transmission peak. Extra loss can occur if the laser source does not match the filter profile. A special filter can be made to match the application. The smaller the fiber core, the higher the loss. Excluding connector loss

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [\[click this link\]](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 11/01/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Electrically Tunable Fiber Optic Filter


(wide range)



(patent pending)



DATASHEET

Mechanical Dimension (mm)

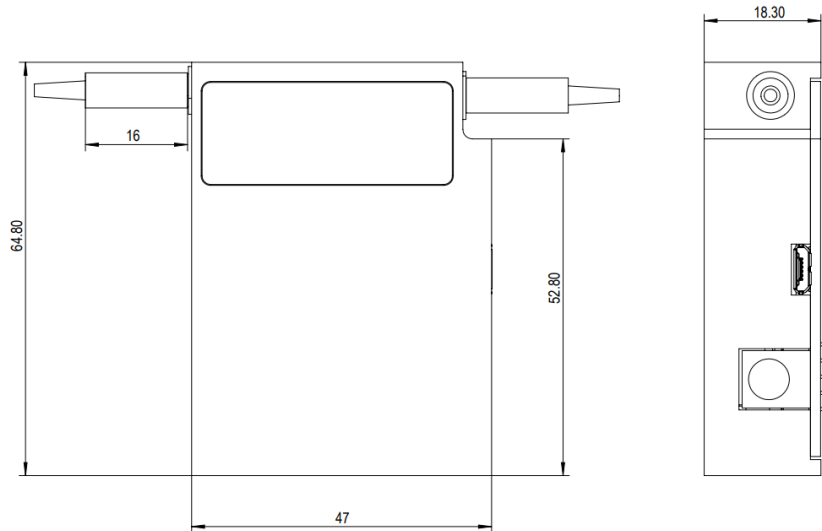

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Typical Transmission Curve

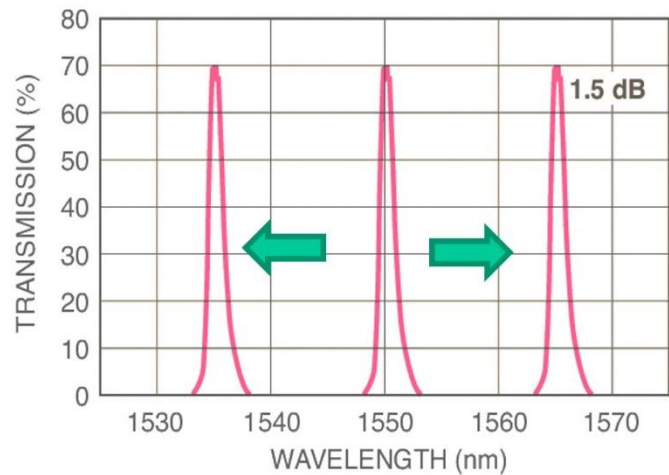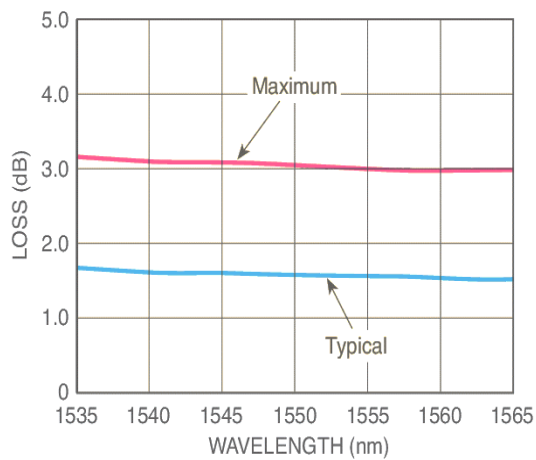

Electrical Driving

Agiltron provides communication protocols and a computer control kit with USB or RS232 interface and Windows™ GUI.

Connector Pin Definition:

Power	Pin 1	GND
	Pin 2	12V

Electrically Tunable Fiber Optic Filter


(wide range)



(patent pending)

DATASHEET

Bandwidth Definition

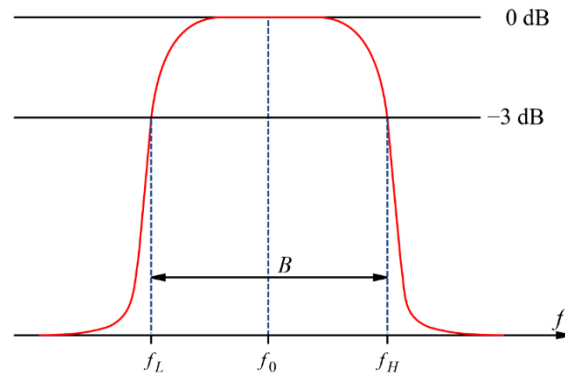

Ordering Information

Prefix	Type	Wavelength	Power	Control	Fiber Type	Fiber Cover	Fiber Length	Connector
FOTF-		2140-2350nm = 1 2040-2160nm = 2 1920-2050nm = 3 1750-1950nm = 4 1510-1660nm = 5 1440-1590nm = 6 1330-1460nm = C 1250-1370nm = 7 1180-1370nm = B 1110-1280nm = A 1090-1190nm = 9 990-1100nm = 8 890-1000nm = D	Standard = 1 High Power = 2	USB = 1 RS232 = 2	SMF-28 = 1 HI1060 = 2 PM980 = 3 PM1550 = 4 SM1950 = 5 PM1950 = 6 Special = 0	900um tube = 3 Bare fiber = 1 Special = 0	1.0 m = 3 0.25m = 1 0.5m = 2 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/UPC = U Special = 0

Red requires to make filter \$1150

Electrically Tunable Fiber Optic Filter

(wide range)



(patent pending)

DATASHEET

Communication protocol

Users can use the following protocol to communicate with the Tunable Filter and control its position.

Hardware setting: com port, 9600 bits per second, No parity, Data bits 8, 1 stop bit.

Command description:

When powered up, the device sends 'V2'. After successfully initialization, the device sends 'o', otherwise it sends 'e' if there is an error on hardware.

Each command is terminated with ','.

When there is a hardware error, unrecognized command, incorrect command format or the previous command has not completed the device replies with 'e'.

Command	Format	Range	Reply
Select channel	C[n],	[n] wavelength(nm); 1500<[n]<1599	C
Scan start	S[n],	[n]: scan span; 1<[n]<30	S: start; S[n]: current wavelength; O: finish
Scan start wavelength	L[n],	[n]: start wavelength(nm); 1500<[n]<1599	L[n]: previous value
Scan end wavelength	H[n],	[n]: end wavelength(nm); 1500<[n]<1599	H[n]: previous value
Scan pause time each wavelength	T[n],	[n]: wait time(second); 1<[n]<30; default 1	T[n]: previous value
Increase the wavelength	I[n],	[n]: Fine tuning up n steps 1<[n]<30	I
Decrease the wavelength	D[n],	[n]: Fine tuning down n steps 1<[n]<30	D
Version	V,		V2

Electrically Tunable Fiber Optic Filter

(wide range)



(patent pending)

DATASHEET

Operation Manual

1. Connect the accompanied wall pluggable power supply
2. Install the accompanied GUI into a computer
3. Connect the device with the computer using the accompanied cable
4. Connect the optical fibers, normally with one end to a source and the other to a system
5. Open the GUI and start scanning the wavelength

How to test the insertion loss of a tunable optical filter

The filter only works in a specific range. Beyond this range, extra peaks may show. These peaks can be blocked with special order. Please follow these instructions to do an optical insertion loss test:

1. Connect a broadband fiber-coupled laser source to OSA, sweep one time over the specified range of the tunable filter, and then fix the curve in Trace A as a reference.
2. Connect the broadband laser source to the fiberoptic tunable filter fiber as input, then connect the other fiber port of the tunable filter as the output to the OSA.
3. Set OSA Trace B as 'write,' Trace C as 'Calculate: B-A.' Auto sweep Trace C from the specific range. Tune the micrometer to shift the peak at a different wavelength. Use 'Peak search' to record IL at a different wavelength."