

# NanoSpeed™ Fiber Optical Resonant Modulator

(10 to 90MHz, High Power, Bidirectional)



DATASHEET

BUY NOW



## Features

- Solid-State
- High speed
- Ultra-high reliability
- Low insertion loss
- Compact

## Applications

- Laser Systems
- Reconfigurable Optics
- Instrumentations

The resonance NS Series fiber optic modulator features fast amplitude and phase modulation at a fixed frequency with a selection from 10 to 90 MHz and low optical loss. This is achieved using a patented electro-optical configuration with a built-in high Q resonant circuit. Unlike other modulators, we use special electro-optical crystals of high stability that increase power handling and reduce drift/darkening. The NS fiber optic switch meets the most demanding switching requirements of continuous operations over 25 years and has non-mechanical ultra-high reliability. The switch is intrinsically bidirectional and selectable for polarization-independent or polarization-maintain by the fiber type.

Our resonant EO modulators can be driven by a standard laboratory function generator with a Half-Wave Drive Voltage of only 15 V at 633 nm. We offer an amplification driver with 5V.

The rise/fall time is intrinsically related to the crystal properties, and the repetition rate is associated with the driver. There are poor frequency response sections due to the device resonances. The NS devices are shipped mounted on a tuned driver.

The NS series switches respond to a control signal with any arbitrary timing with frequency from DC up to MHz. The switch is usually mounted on a tuned driver prior to shipping. The electrical power consumption is related to the repetition rate at which the switch is operated.

The response is a sinusoidal wave shape for resonance devices.

## Specifications

Parameter		Min	Typical	Max	Unit
Insertion Loss <sup>[1]</sup>	1900-2200nm		1.3	2.2	dB
	1260~1620nm		1	2	dB
	960~1100nm		1.5	2.6	dB
	780-960nm		1.7	3	dB
Cross Talk <sup>[2]</sup>		18	20	35	dB
Durability		10 <sup>14</sup>			cycles
PDL (SMF Switch only)			0.15	0.3	dB
PMD (SMF Switch only)			0.1	0.3	ps
ER (PMF Switch only)		18	25		dB
IL Temperature Dependency			0.25	1.5	dB
Return Loss		45	50	60	dB
Repetition Rate			20	90	MHz
Driving Voltage		12		35	V
Optic Power Handling <sup>[4]</sup>	Normal power version		300		mW
	High power version			5	W
Operating Temperature	Standard	-5		75	°C
	Large range version	-30		85	°C
Storage Temperature		-40		100	°C

### Notes:

[1] Measured without connectors.

Wavelength <850nm or > 1700nm is available only in the special version with a long lead time.

[2] ± 25nm, Cross talk is measured at 100kHz, which may be degraded at a higher repeat rate.

[3] It is defined as the rising or fall time between 10% and 90% of optical intensities.

[4] Defined at 1310nm/1550nm. For the shorter wavelength, the handling power may be reduced, please contact us for more information. High power version is available by incorporating fiber core enlargement (expensive).

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 12/08/23

# NanoSpeed™ Fiber Optical Resonant Modulator

(10 to 90MHz, High Power, Bidirectional)




## DATASHEET

### Electrical Information


Signal Control Input: 0-30V Analog SMA

### Mechanical Dimensions (Unit: mm)

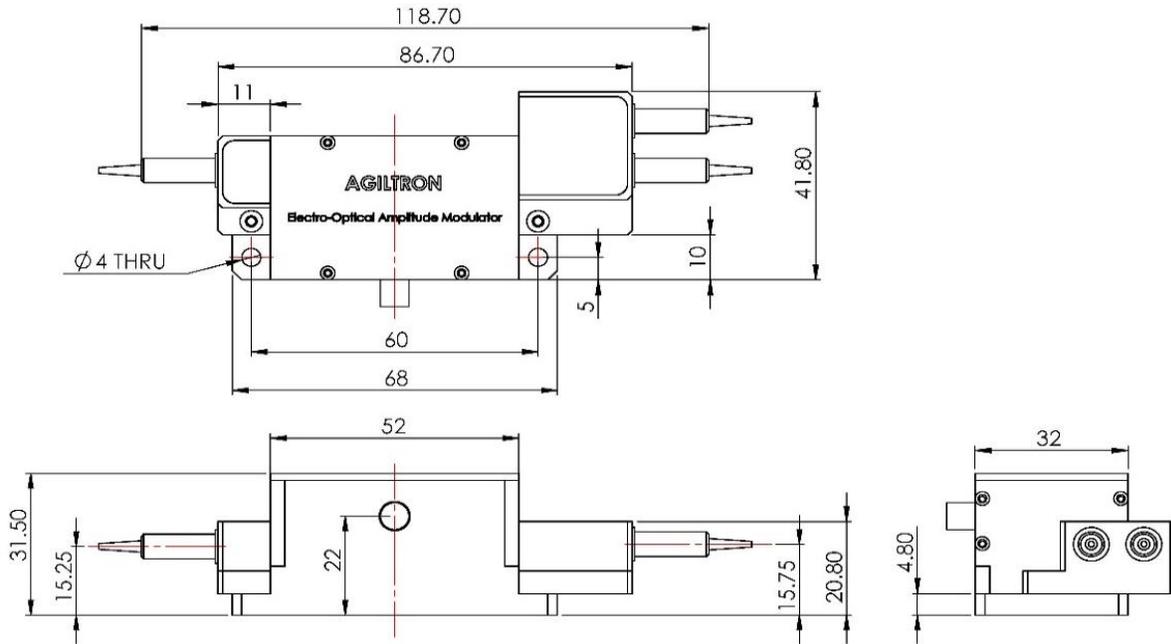

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### Typical Bandwidth Measurement

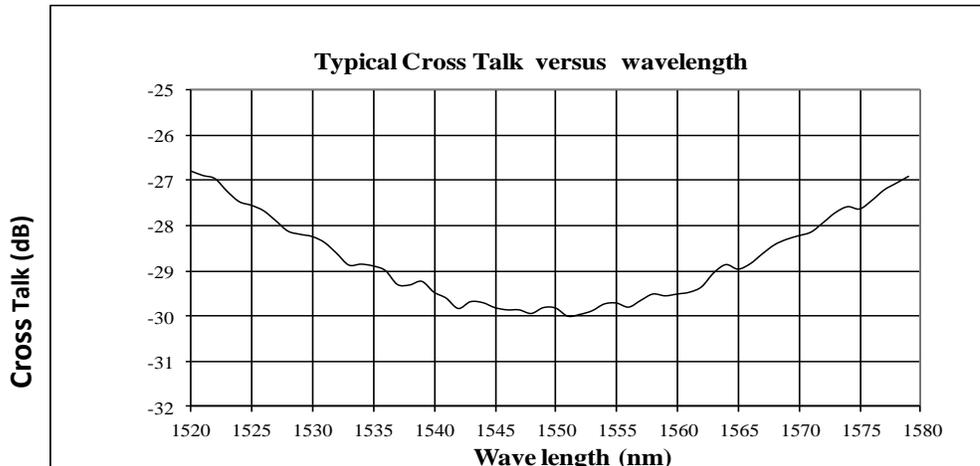

# NanoSpeed™ Fiber Optical Resonant Modulator

(10 to 90MHz, High Power, Bidirectional)



## DATASHEET

### Ordering Information

Prefix	Type	Wavelength	Power Handling <sup>[1]</sup>	Repetition Rate	Fiber Type	Fiber Cover	Fiber Length	Connector <sup>[2]</sup>	Driver
NSRM-	Amplitude = 1 Phase = 2	1060=1 2000=2 1310=3 1550=5 1625=6 780=7 850=8 650=E Special=0	Regular = 1 500mW = 2 5W = 5	10MHz=10 20MHz= 20 30MHz = 30 40MHz = 40 50MHz = 50 60MHz = 60 70MHz = 70 80MHz = 80 90MHz = 90 Special=00	SMF-28=1 HI1060=2 HI780=3 PM1550=5 PM850=8 PM980=9 Special=0	0.9mm tube = 3 Special = 0	1.0 m = 3 Special = 0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC/PC=7 LC/APC=8 E2000APC=9 Special=0	None=1 Yes=2

[1]: Wavelength < 850nm or > 1700nm is available only in the special version with a long lead time

[2]: Please contact the sale about the high power connector for NPHW version.

#### NOTE:

- PM1550** fiber works well for **1310nm**
- Opaque** – light is blocked without applying a voltage
- Transparent** – light goes through without applying a voltage

#### Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

#### Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

#### Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.


# NanoSpeed™ Fiber Optical Resonant Modulator

(10 to 90MHz, High Power, Bidirectional)



DATASHEET

## Optical Power Handling vs Wavelength For Single-Mode Fibers

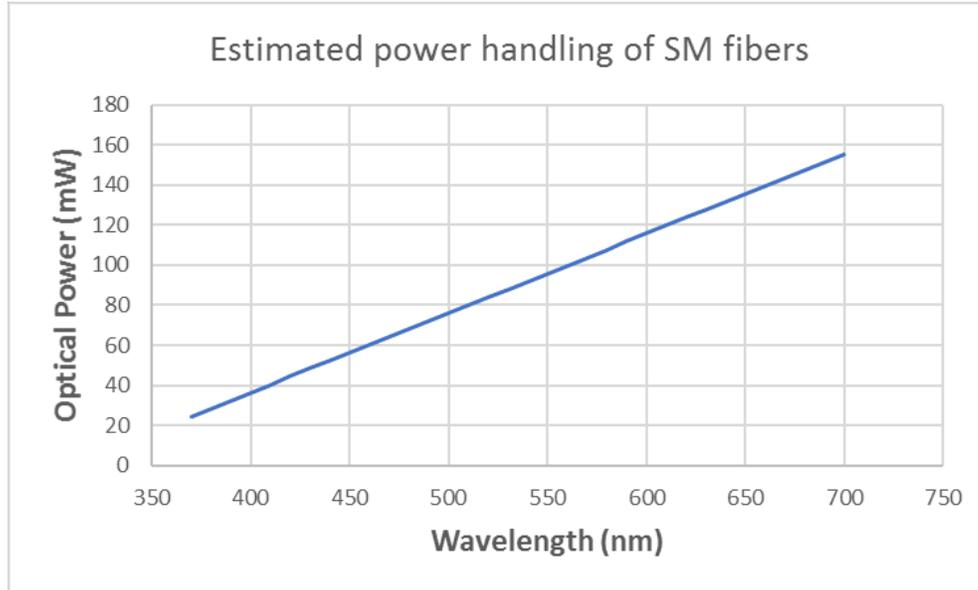

## Operation Manual

1. Connect a control signal to the SMA connector on the box.
2. The device should then function properly.

**Note:** Do not open the box and alter device factory settings.