

Fiber Optical Tap Monitor Array

(4, 8, 10, 12 channels)



DATASHEET

BUY NOW



Features

- Low Dark Current
- Ease PCB Mount
- Wide Wavelength
- High Stability

Applications

- WDM Channel Monitor
- System Monitor
- Sensor

The Integrated Fiber Optical Tap Monitor Array (ITMA) is a multi-channel power monitoring device that integrates an array of individual fiber optical tap monitors in a compact format. The ITMA combines the functions of a low-percentage optical coupler and a photodiode, delivering low insertion loss and low dark current, with excellent temperature stability over a wide operating wavelength range. It features a standard 12/14-pin package for easy PCB mounting, with each channel equipped with two fibers.

A readout amplification PCB is available to mount the ITMA with a USB/RS232 interface. We also provide custom designs to meet specialized application needs.

Specifications

Parameter	Min	Typical	Max	Unit
Operation Wavelength	1260		1620	nm
Insertion Loss ^[1]	2%		0.4	dB
	5%	0.8	0.6	
	10%	1.0	0.9	
Polarization Dependent Loss			0.05	dB
Return Loss	45			dB
Responsivity ^[2]	2%	10	26	mA/W
	5%	26	65	
	10%	52	120	
Responsivity Temperature Dependence			0.3	dB
Responsivity Polarization Dependence			0.1	dB
Dark Current ^[3]	2.5		10	nA
Reverse Voltage			20	V
Forward Current			10	mA
Input Optical Power	2%		21	dBm
	5%		16	
	10%		12	
Operating Temperature	-5		70	°C
Storage Temperature	-40		85	°C
Fiber Type		SM-28		

Notes:

[1]. @ λ_{op} , Top, All SOP, Exclude Connector

[2]. Relative to input power

[3]. Measured at -5V bias, 70 °C

Warning: The device is extremely ESD-sensitive. Its dark current increases by unprotected handling. It is recommended to be handled under a certified ion fan once the package is removed.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 09/24/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Fiber Optical Tap Monitor Array


(4, 8, 10, 12 channels)




DATASHEET

Mechanical Dimensions (mm)


1) 4-ch ITMA

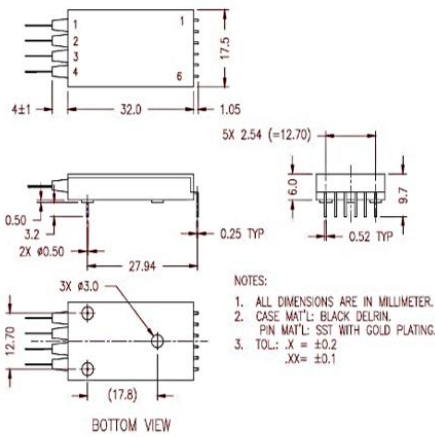

2) 8-ch ITMA

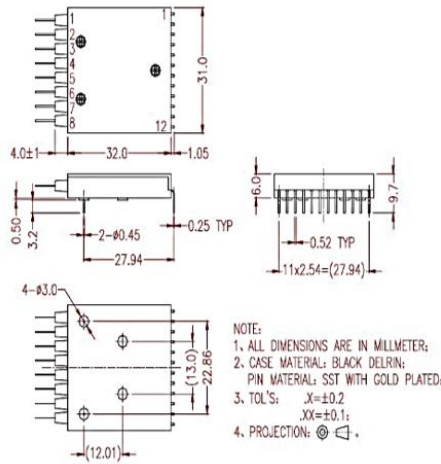

3) 10-ch ITMA

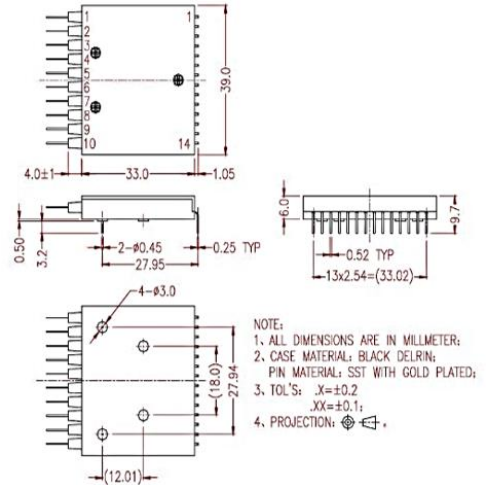

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical/Computer Connection

4-ch ITMA

Electrical Pin Assignment		
Pin #:	Common Cathode Assignment	Common Anode Assignment
Pin 1:	Common Cathode for Ch1 & 2	Common Anode for Ch1 & 2
Pin 2:	Anode Ch1	Cathode Ch1
Pin 3:	Anode Ch2	Cathode Ch2
Pin 4:	Common Cathode for Ch3 & 4	Common Anode for Ch3 & 4
Pin 5:	Anode Ch3	Cathode Ch3
Pin 6:	Anode Ch4	Cathode Ch4

8-ch ITMA

Electrical Pin Assignment		
Pin #:	Common Cathode Assignment	Common Anode Assignment
Pin 1:	Common Cathode for Ch1 & 2	Common Anode for Ch1 & 2
Pin 2:	Anode Ch1	Cathode Ch1
Pin 3:	Anode Ch2	Cathode Ch2
Pin 4:	Common Cathode for Ch3 & 4	Common Anode for Ch3 & 4
Pin 5:	Anode Ch3	Cathode Ch3
Pin 6:	Anode Ch4	Cathode Ch4
Pin 7:	Anode Ch5	Cathode Ch5
Pin 8:	Common Cathode for Ch5 & 6	Common Anode for Ch5 & 6
Pin 9:	Anode Ch6	Cathode Ch6
Pin 10:	Anode Ch7	Cathode Ch7
Pin 11:	Common Cathode for Ch7 & 8	Common Anode for Ch7 & 8
Pin 12:	Anode Ch8	Cathode Ch8

10-ch ITMA

Electrical Pin Assignment		
Pin #:	Common Cathode Assignment	Common Anode Assignment
Pin 1:	Common Cathode for Ch1 & 4	Common Anode for Ch1 & 4
Pin 2:	Anode Ch1	Cathode Ch1
Pin 3:	Anode Ch2	Cathode Ch2
Pin 4:	Anode Ch3	Cathode Ch3
Pin 5:	Anode Ch4	Cathode Ch4
Pin 6:	Anode Ch5	Cathode Ch5
Pin 7:	Common Cathode for Ch5 & 8	Common Anode for Ch5 & 8
Pin 8:	Anode Ch6	Cathode Ch6
Pin 9:	Anode Ch7	Cathode Ch7
Pin 10:	Anode Ch8	Cathode Ch8
Pin 11:	Anode Ch9	Cathode Ch9
Pin 12:	Common Cathode for Ch9 & 10	Common Anode for Ch9 & 10
Pin 13:	Anode Ch10	Cathode Ch10
Pin 14:	Not connected	Not connected


Fiber Optical Tap Monitor Array

(4, 8, 10, 12 channels)



DATASHEET

Spectral Response

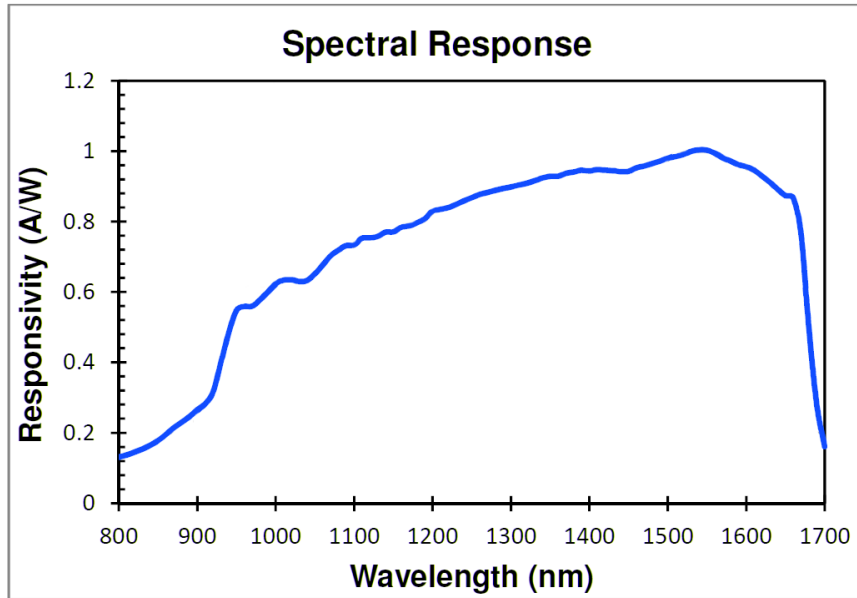

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.

Fiber Optical Tap Monitor Array

(4, 8, 10, 12 channels)



DATASHEET

Ordering Information

Prefix	No. Channel	Tap Ration	Bandwidth	Package *	Fiber Type	Fiber Cover	Fiber Length	Connector
ITMA-	4 = 04 8 = 08 10 = 10 12 = 12	2% = 2 5% = 5 10% = 1 Special = 0	0.5G = 5 2G = 2	Common Anode = 1 Common Cathode = 2 Mount on PCB = 3	SMF-28 = 1 HI1060 = 2 HI780 = 7 HI980 = 9 Special = 0	Bare fiber = 1 900um Loose tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

* Mount on PCB: amplifier PCB with 0-5V output or USB/RS232 interface with GUI. \$990