


1485nm FBG Pump Laser Diode

up to 300mW, SM, PM



DATASHEET

[Return to the Webpage](#)

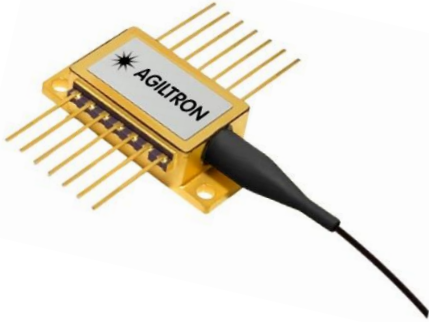

Features

- Up to 320mW(1420nm to 1465nm)
- Up to 300mW(1466nm to 1495nm)
- Up to 280mW(1496nm to 1510nm)
- Grating stabilized
- High thermal efficiency
- Robust high-power operation(0 to 70°C)

Applications

- 40GHz and ultra-long haul systems
- Distributed or discrete Raman amplification



The 3400 series 14xxnm, 300mW laser diode is wavelength selected between 1420nm and 1510nm using grating-stabilized, polarization maintaining(PM) fiber. It is fabricated in a hermetically sealed 14-pin butterfly package. The laser diodes contain thermoelectric cooler (TEC), thermistor, monitor photodiode, optical isolator to secure high quality laser performance. The Pump Laser is ideal for distributed or discrete Raman amplification applications (1420nm to 1510nm). Up to 300mW power and high thermal efficiency enable longer links and spans, lower bit error rate(BER), and greater wavelength coverage for 40GHz and ultra-long haul(ULH) systems

Specifications

Parameter	Min	Typical	Max	Unit
Operating Case Temperature	-5		+70	°C
Storage Temperature	-40		+75	°C
Forward Current			1.8	A
Laser Reverse Voltage			2	V
PD Forward Current			10	mA
PD Reverse Voltage			20	V
TEC Current			4	A
TEC Voltage			4.5	V
Threshold Current	-	-	150	mA
Kink-free Operating Current	$1.2I_{op}$	-	-	mA
TEC Set Temperature	15	-	35	°C
Monitor PD Current	-	-	1000	μA
Monitor PD Dark Current	-	-	50	nA
Monitor PD Capacitance	-	-	20	pF
Front-to-rear Tracking Ratio	0.95	-	1.05	/
Front-to-rear Tracking Error	-8	-	+8	%
Thermistor Resistance	9.5	10	10.5	KΩ
Max TEC Power Consumption(EOL)		≤13.5		W
Mean Thermistor B Constant	3700	-	4100	K
Optical & Electrical Characteristics				
Center Wavelength (TL=25°C, CW)	$\lambda_c - 2$	-	$\lambda_c + 2$	nm
Target Wavelength (TL=25°C, CW)	1420	-	1510	nm
Channel Spacing		1		nm
Spectral Width	-	-	1.0	nm
Polarization Extinction Ratio	13	-	-	dB
Optical Isolation	30	-	-	dB
Fiber Type	SM15-PS-U40D(Fujikura)			
Pigtail Type	400μm bare fiber			
Pigtail Length	1.0±0.1m			
Connector Type	FC/APC			

Notes:

The PM fiber and the connector key(narrow key) are aligned to the slow axis, fast axis is blocked

* Optical Characteristics (at 25° C laser temperature)

** Electrical Characteristics (at 25° C laser temperature)

Rev 11/06/24

© Photonwares Corporation

+1 781-935-1200

sales@photonwares.com

www.agiltron.com


1485nm FBG Pump Laser Diode

up to 300mW, SM, PM




DATASHEET

Mechanical Dimension (mm)

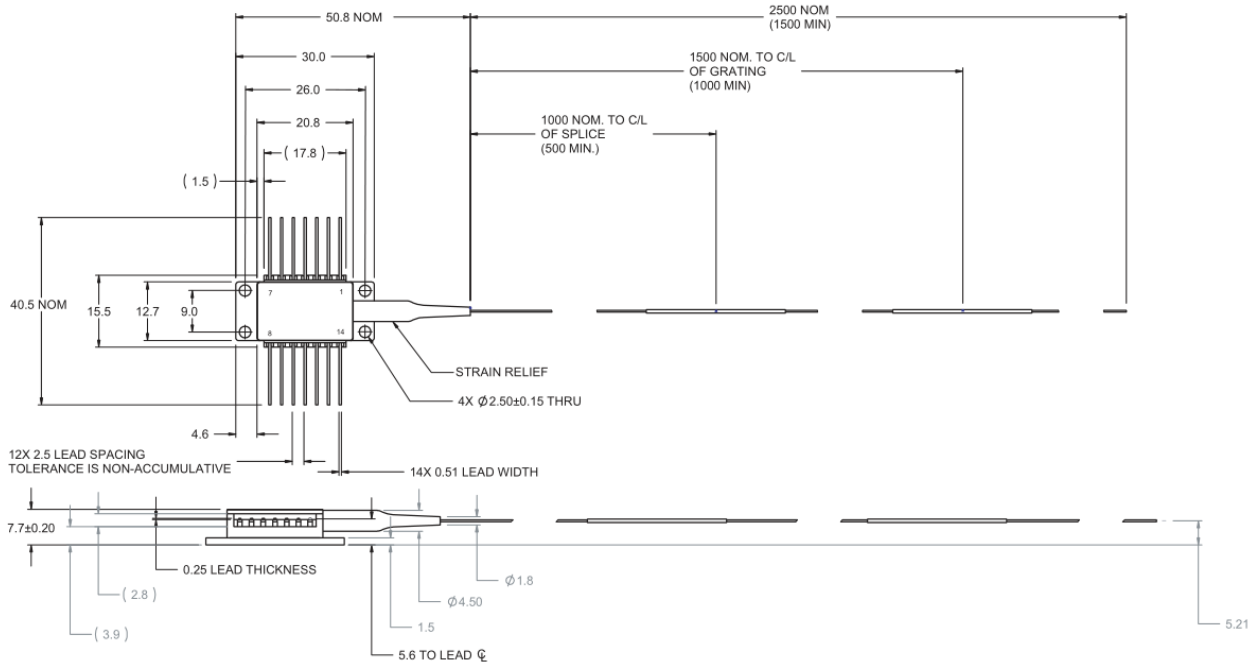

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

PIN Assignment

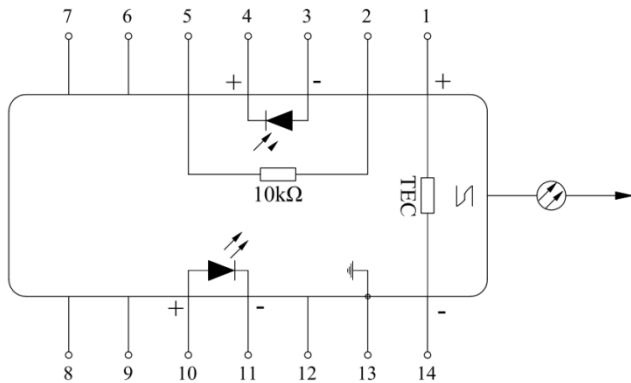

PIN	Function
1	Thermoelectric Cooler (+)
2	Thermistor
3	Monitor PD Anode (-)
4	Monitor PD Cathode (+)
5	Thermistor
6	NC
7	NC
8	NC
9	NC
10	Laser Anode (+)
11	Laser Cathode (-)
12	NC
13	Case Ground
14	Thermoelectric Cooler (-)


1485nm FBG Pump Laser Diode

up to 300mW, SM, PM




DATASHEET

Typical Spectrum

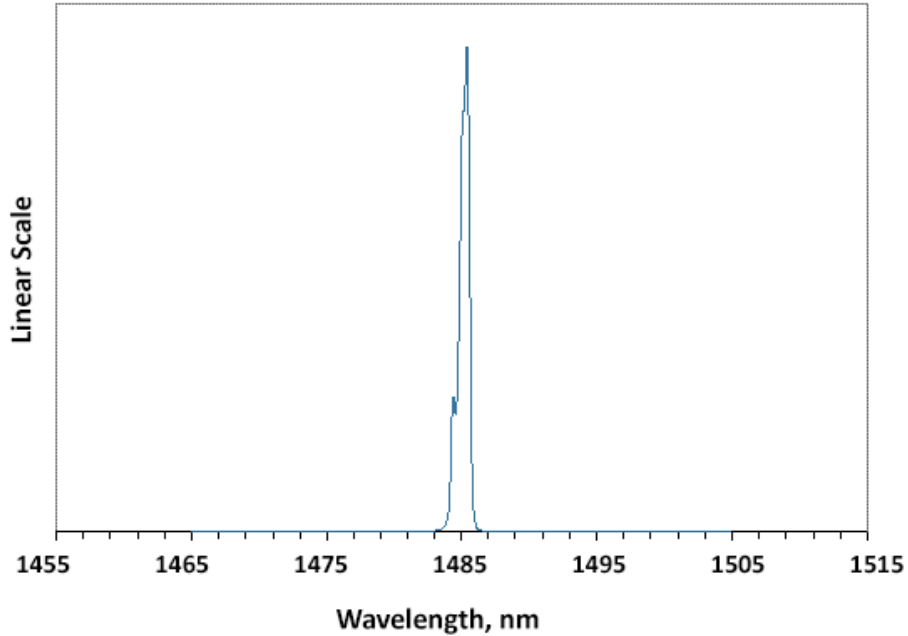

Ordering Information

Prefix	Wavelength	Output Power	Linewidth	TEC Cooling	PD	Fiber Type	Fiber Buffer	Fiber Length	Connector
FBGD-	1485nm = 48 Special = 0	180mW = 1 200mW = 2 220mW = A 240mW = B 260mW = C 280mW = D 300mW = 3	1nm = 1	Yes = 2	None = 1 Yes = 2	SM28 = 1 PM1550 = 5 50/125 = M Special = 0	0.9mm Tube = 3 Special = 0	1.0 m = 1 Special = 0	FC/APC = 3 Special = 0

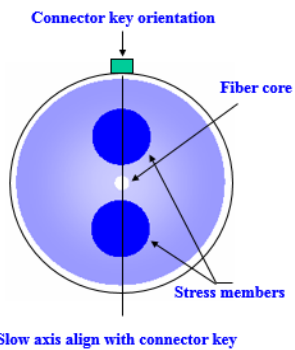

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

1485nm FBG Pump Laser Diode

up to 300mW, SM, PM

DATASHEET

Benchtop Matching Laser Diode Driver



Agiltron cost-effective LDCB series benchtop control kit is designed for easy laser diode mounting and precise control. It incorporates a high-precision, low-noise auto-feedback drive electronics to ensure constant output power or a constant driving current and an integrated temperature control unit maintains optimal operating conditions. The system provides up to 1A driving current and up to 2A TEC cooling current. Each system features a front fiber output connector. The user interface includes an intuitive LCD display for independent control of output power and temperature via two front rotating knobs. The LDCB also includes a universal power supply compatible with 100 to 240 VAC. The LDCB has a built-in isolator option to prevent reflection-induced laser emissions instability. The LDCB is designed as a laser diode and TEC controller kit for customer to install laser diode. It has three types of pluggable laser mounts of butterfly, DIL, and TOCAN. The TOCAN mount contains an external TEC that maintains a constant temperature for wavelength stability.

For details please click: <https://agiltron.com/product/laser-diode-tec-controllers-benchtop-kit/>

Turn-Key Module Matching The Laser Diode



The Agiltron LDCM series laser source module is designed for OEM applications and features all-in-one high reliability and highly stable laser output. The LDCM contains high-precision, low-noise, auto-feedback laser diode drive electronics to ensure constant output power or driving current and an integrated temperature controller that maintains optimal operating conditions. An optional fiber optical isolator can be integrated to prevent reflection-induced laser emission instability, which is essential for achieving highly stable lasers. Agiltron produces isolators from 370nm to 2600nm. The system provides up to 1A driving current and up to 2A TEC cooling current. Each unit features a single FC/APC connector output and two front rotating knobs for independent setting of laser output power and temperature. A toggle switch allows selection between constant current control mode and feedback constant output power mode.

For details please click: <https://agiltron.com/product/laser-diode-tec-controllers-module/>

Laser Driver Kit



Agiltron cost-effective LDCD series module control kit is designed for easy laser diode mounting and precise control. It incorporates a high-precision, low-noise auto-feedback drive electronics to ensure constant output power or a constant driving current and an integrated temperature control unit maintains optimal operating conditions. The system provides up to 1A driving current and up to 2A TEC cooling current. It has three types of pluggable laser mounts of butterfly, DIL, and TOCAN. The TOCAN mount contains an external TEC that maintains a constant temperature for wavelength stability. It comes with cables to connect between the mounting module to the driving module, making integration convenient.

For details please click: <https://agiltron.com/product/laser-diode-tec-controllers-compact/>



1485nm FBG Pump Laser Diode

up to 300mW, SM, PM



DATASHEET

Caution Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a laser diode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots



Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 μm .

Maximum power = 30 mW.



*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

*IEC is a registered trademark of the International Electrotechnical Commission.