

NanoSpeed™ 2x4, 4x4 Fiber Optical Switch

(100ns, Bidirectional)



DATASHEET

[Return to the Webpage](#)



The NSSB Series high-speed fiber optic switch features ultra-fast switching, exceptionally low optical loss, and high optical power handling in a turnkey rack-mount package with high-speed TTL SMA control inputs. Switching is achieved through a patented electro-optical configuration that delivers clean, ripple-free transitions, ensuring continuous operation for over 25 years with non-mechanical, ultra-high reliability. A non-blocking configuration is constructed using multiple NS 1×2 switches, all managed via five TTL pins for rapid routing among all possible light paths. The NS Series is intrinsically bidirectional and available in either polarization-independent or polarization-maintaining versions. Switching speed is defined by the crystal's rise/fall time, while the repetition rate depends on the tuned driver, with resonances limiting frequency response in certain bands. Each unit ships pre-mounted on a matched driver optimized for the intended operating range. Electrical power consumption varies with switching frequency.

Features

- Solid-State
- High Speed
- Ultra-High Reliability
- Low Insertion Loss
- Compact

Applications

- Optical blocking
- Configurable operation
- Instrumentation

Specifications

Parameter	Min	Typical	Max	Unit
Insertion Loss ^[1]	1900-2200nm	3.2	4	dB
	1260~1650nm	3	3.5	dB
	860~1100nm	4	5	dB
	480-860nm	5	6	dB
Cross Talk On/Off Ratio ^[2]	45	50	55	dB
Durability	10 ¹⁴			cycles
PDL (SMF Switch only)		0.15	0.3	dB
PMD (SMF Switch only)		0.1	0.3	ps
ER (PMF Switch only)	18	25		dB
IL Temperature Dependency		0.25	1	dB
Return Loss	45	50	60	dB
Optical Transition Time ^[3]		100	300	ns
Repetition Rate	DC		200	kHz
Optic power Handling ^[4]	Normal power switches	0.3	20	W
	High power switches		5	W
Operating Temperature	Standard	-5	75	°C
	Large range version	-30	85	°C
Storage Temperature	-40		100	°C

Notes:

[1] Measured without connectors. Wavelength with red color can be implemented in the special version, please contact us. For 1x16 switch

[2] ± 25nm, Cross talk is measured at 100kHz, which may be degraded at the higher repeat rate.

[3] It is defined as the rising or fall time between 10% and 90% of optical intensities.

[4] Defined at 1310nm/1550nm. For the shorter wavelength, the handling power may be reduced, please contact us for more information.

High power version available by incorporating fiber core enlargement (expensive).

Warning: This is an OEM module designed for system integration. Do not touch the PCB by hand. The electrical static can kill the chips even without a power plug-in. Unpleasant electrical shock may also be felt. For laboratory use, please buy a Turnkey system.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 05/17/25

NanoSpeed™ 2x4, 4x4 Fiber Optical Switch


(100ns, Bidirectional)



DATASHEET

Mechanical Dimensions (Unit: mm)

4x4 module will be packaged in 1RU 19" mounting rack or similar package. The control interface of TTL will be through D-shape connector.

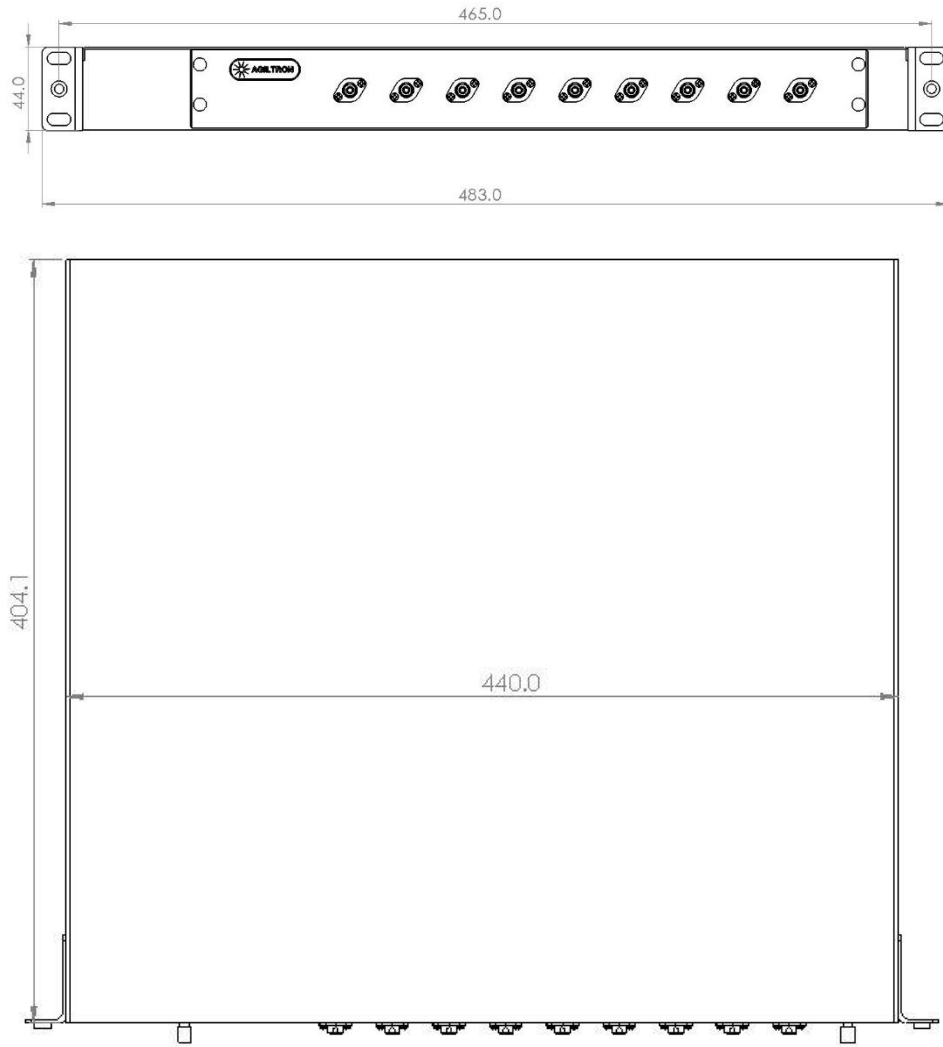

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

NanoSpeed™ 2x4, 4x4 Fiber Optical Switch

(100ns, Bidirectional)



DATASHEET

Ordering Information

Prefix	Configuration	Wavelength ^[3]	Repetition Rate	Fiber Type	Connector ^[4]	Optical Power
NSSB-	2x4 = 0204 4x4 = 0404 Special = 0000	1060 = 1 2000 = 2 1310 = 3 1550 = 5 1625 = 6 780 = 7 850 = 8 650 = E Special = 0	100kHz = 1 200kHz = 2 300kHz = 3 Special = 0	SMF-28 = 1 HI1060 = 2 HI780 = 7 PM1550 = 5 PM980 = 9 PM850 = 8 PM1310 = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = 8 E2000 APC = 9 MPO = Y Special = 0	Regular = 1 1W = A 2W = B 5W = C 10W = D 20W = E

[5]. Rack Mount Depth ~ 430mm.

Note:

- PM1550** fiber works well for **1310nm**

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.


NanoSpeed™ 2x4, 4x4 Fiber Optical Switch

(100ns, Bidirectional)



DATASHEET

Optical Power Handling vs Wavelength For Single-Mode Fibers

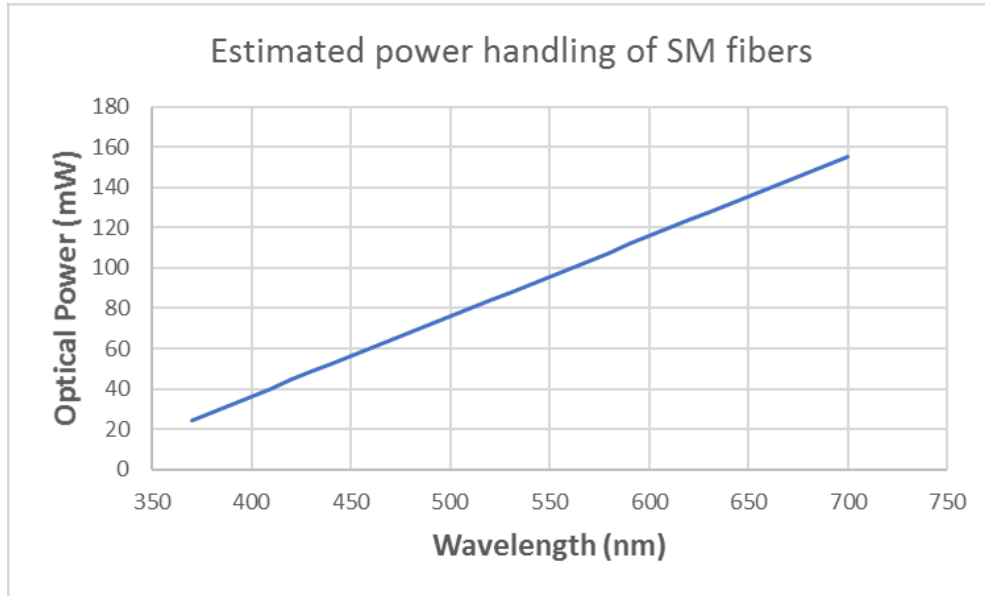

Typical Speed Response Measurement

