


KHz - 100GHz Photoreceiver Module – SM

SM28, power supply included



DATASHEET

[Return to the Webpage](#)

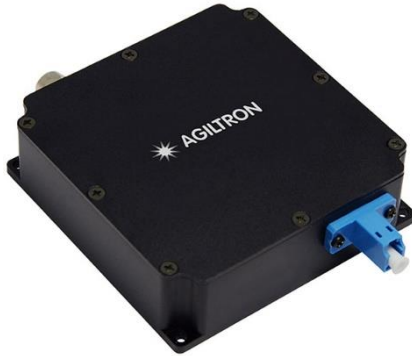

Features

- Up to 100 GHz Analog Bandwidth
- High Linearity

Applications

- Sensor
- RF over Fiber



The HPRM is a turnkey high-speed photoreceiver engineered for advanced analog and digital applications. It integrates a high-speed photodetector with a broadband RF amplifier to achieve 10 dBm output. With its high conversion gain and low input-referred noise, the HPRM delivers exceptional linearity and precision. The RF output utilizes 1mm male connector. The unit includes a pluggable low-noise power supply, ensuring simple, reliable plug-and-play operation.

Specifications

Parameter	Min	Typical	Max	Unit
Optimized Operating Wavelength	1250		1650	nm
Optical Input Level			+7	dBm
S21 3 dB Bandwidth	50kHz	100		GHz
Gain	11	13		dB
Optical Return Loss		30		dB
Optical PDL @ 1550 nm			0.25	dB
Output Return Loss (up to 25 GHz)	-10			dB
Impedance		50		Ω
Noise Floor	5		10	dB
Noise Equivalent Power (NEP) @ 1GHz		17		pA/√Hz
Operating Temperature	-40		50	°C
Storage Temperature	-55		85	°C
Power Supply Requirements		12		V
Power Current		400		mA
Optical Connector		FC/APC		
RF Output Connector		1 mm, Male		
Operating Temperature	-40		60	mW
P1dB -1Vpp	8		1	dBm

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 07/25/25

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


KHz - 100GHz Photoreceiver Module – SM

SM28, power supply included




DATASHEET

Dimensions (mm)

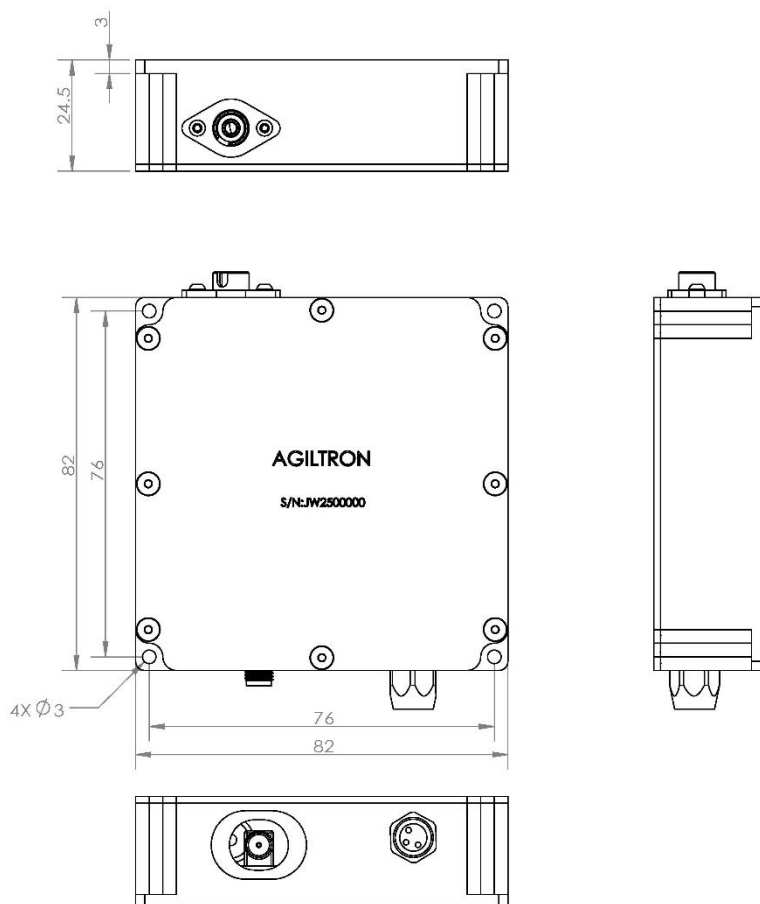

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Function Diagram

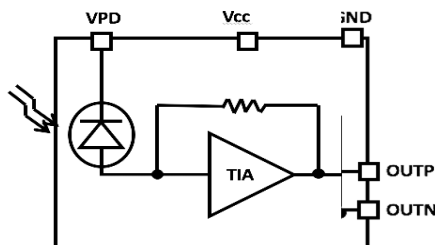


KHz - 100GHz Photoreceiver Module – SM

SM28, power supply included



DATASHEET

S21 Graph

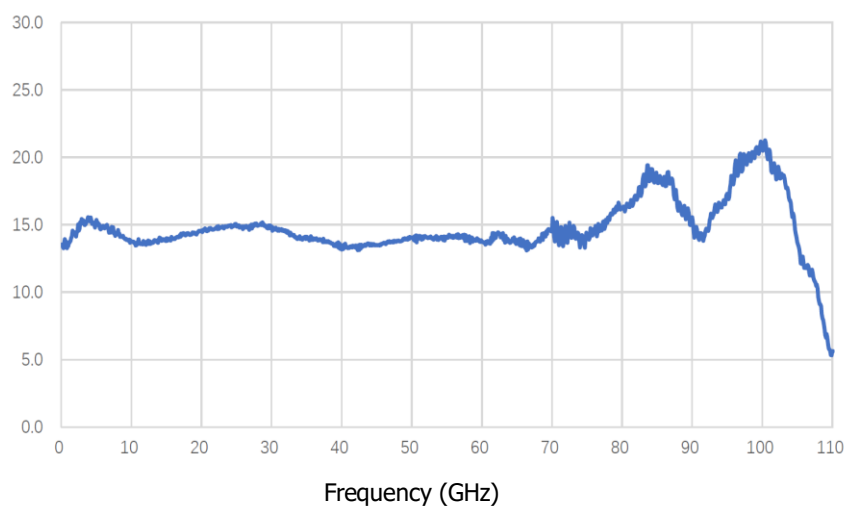

Ordering Information

	1	1	11	1	2	1	1	<input type="checkbox"/>
Prefix	Detector Type	Wavelength Range	Bandwidth	Coupling	Module *	Configuration	Fiber	Connector *
HPRM-	PIN = 1	1200-1600nm = 1	100GHz = 11	DC = 1 AC = 2	Non = 1 Yes = 2		SM28 = 1	FC/APC = 3 Special = 0

* Default connector for SM is FC/APC, and For MM is FC/PC

KHz - 100GHz Photoreceiver Module – SM

SM28, power supply included



DATASHEET

Operation Instruction

- **Power Connection** - Connect the included low-noise power supply to the DC power input connector on the HPRM.
- **Optical Input Connection** - Connect the optical signal to the FC/APC input connector on the HPRM. ⚠ Note: Ensure the input connector is FC/APC. Using a non-angled connector (e.g., FC/PC) may result in up to 7 dB insertion loss and increased back reflection.
- **RF Output Connection** - Connect the RF output
- **DC Output Considerations** - For most applications, the default DC-coupled RF output is sufficient. If your downstream equipment requires AC coupling, or if you need to eliminate the DC component of the output signal, insert an external DC block in the RF signal path.

Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 μm .

Maximum power = 30 mW.

