

# Bandpass Filter with Attenuation

(20/40 GHz, 3.5V, bias control option)




DATASHEET

[Return to the Webpage](#)



Agiltron BPF series bandpass filter with built-in attenuation function is based on thin-film filter technology and micro-optics package. It features excellent uniformity with wide wavelength range, low insertion loss and designated attenuation for assigned bands. These features give the great flexibility for customer applications. Agiltron expertise team is happy to provide customized optical solutions to meet customers' specific needs.

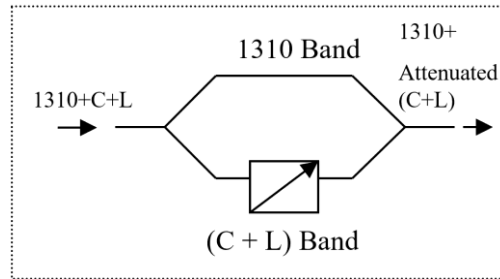

## Features

- Excellent Uniformity
- Low Excess Loss
- Low Polarization
- Sensitivity
- Highly Stable & Reliable
- Effective cost
- Customized Design

## Applications

- Telecommunications
- CATV Fiberoptic Links
- Fiber Amplifier System
- Fiberoptic Instrumentation

## Specifications

Parameter		Min	Typical	Max	Unit
Operation Wavelength	1310-Band	1270		1330	nm
	C + L-Band	1525		1625	
Insertion Loss	1310-Band		1.0		dB
	C + L-Band		12 ± 1.5		
Polarization Dependent Loss			0.1	0.2	dB
Return Loss		30			dB
Operating Temperature		0		70	°C
Storage Temperature		-40		85	°C

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 03/19/25


# Bandpass Filter with Attenuation

(20/40 GHz, 3.5V, bias control option)



DATASHEET

## Mechanical Dimensions (mm)

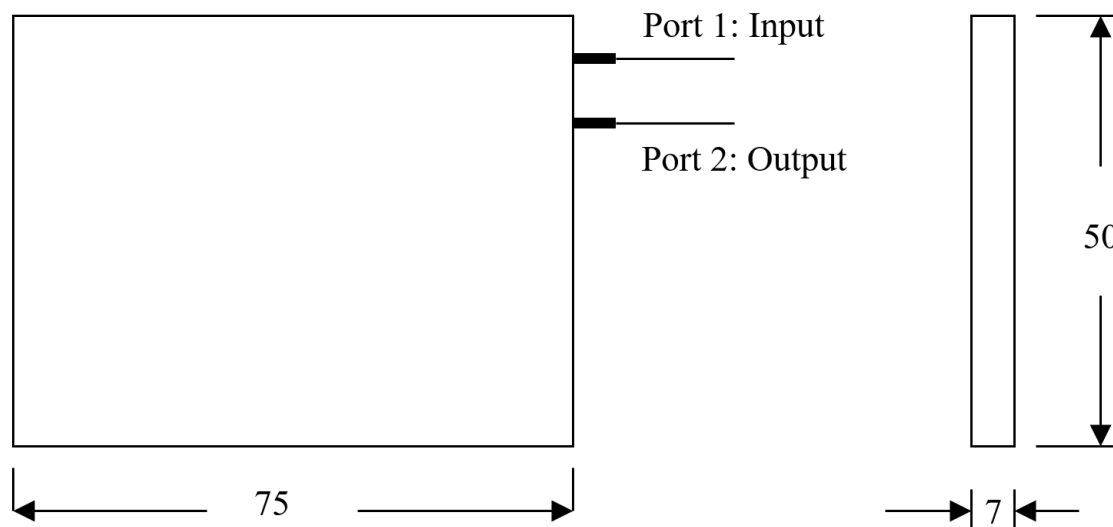

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.


# Bandpass Filter with Attenuation

(20/40 GHz, 3.5V, bias control option)



## DATASHEET

### Spectral Performance

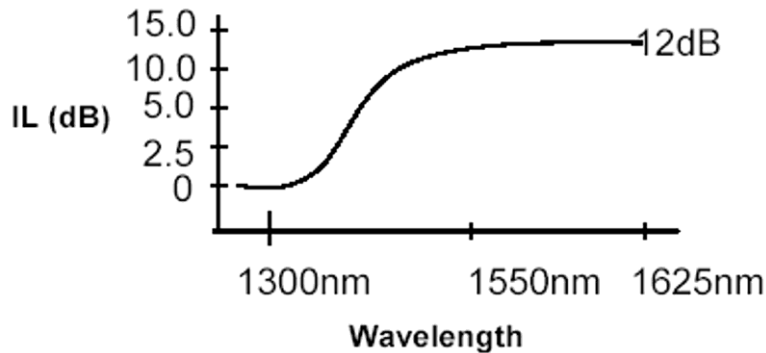

### Ordering Information (Part Number)

Prefix	Type	Wavelength	Grade	Package	Configuration	Port	Fiber Type	Fiber Cover	Fiber Length	Connector <sup>[1]</sup>
BPF-		Standard = 1 Special = 0	Regular = 1 Special = 0	Standard = 1 Special = 0	Standard = 1 Special = 0	2-port = 1 Special = 0	SMF-28 = 1	0.9mm tube = 1 Special = 0	0.5m = 1 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Special = 0

### Application Notes

**[1]. The connector cannot be installed directly onto bare fiber, as it is**

**prone to damage during shipping. However, the connector can be**

**assembled on bare fiber if a 3 cm protective loose tube is added for**

**reinforcement. The customer can remove this protective tube after testing.**

**The optical power handling of a standard connector is less than 0.5 W for**

**SM28 fiber and decreases further with smaller core fibers.**

**Fiber Cleanliness**

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

#### Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.