

# Fiber-Fiber™ Optical Switch 1x1, 1x2

(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents



DATASHEET

[Return to the Webpage](#)



## Features

- Ultra Low Loss ~0.2dB
- Ultra Broadband
- Little Wavelength Dependence
- Little Temperature Dependence
- Fast <0.5ms
- Vibration Insensitive

## Applications

- Laser Systems
- Reconfigurable Optics
- Instrumentations

The FF Series fiber optic switch delivers industry-leading performance, offering nearly lossless, continuous light transmission without perturbations. Its ultra-broadband operation is limited only by the intrinsic properties of the fiber, making it highly versatile for a wide range of applications. The switch features fast switching times (<1 ms), insensitivity to temperature and vibration, a high on/off extinction ratio, high polarization extinction ratio, and cost-effective. At the core of this innovative design is a MEMS-based auto-alignment silicon chip, which achieves direct fiber-to-fiber coupling. A tiny gap (less than 5 microns) between fibers is filled with a non-fluorescent, index-matching liquid, creating an ultra-low-loss optical path without requiring lenses or coatings—effectively eliminating surface reflection issues. This design ensures continuous, high-fidelity light transmission, making it ideal for spectroscopy, optical coherence tomography (OCT), interferometry, and other systems sensitive to optical losses and reflections. The FF platform is compatible with all fiber types that have a 125 μm outer diameter, including single-mode (SM), multimode (MM), polarization-maintaining (PM), double-cladding fibers, and bend-insensitive fibers, supporting both large and small core configurations. The switch operates via an electrical relay with a latching mechanism, maintaining the selected optical path even when power is removed. Bidirectional light paths are controlled using a 4.5V electrical pulse, with no continuous power consumption required—energy is only consumed during switching events. Two versions of MEMS chips are available: a fast-switching chip optimized for single-mode fibers and a slow-switching chip designed for polarization-maintaining fibers. The PM fiber switches maintain both polarization states consistent with the input fiber's alignment.

## Specifications

| Parameter                              | Min             | Typical  | Max    | Unit   |
|--|-----------------|----------|--------|--------|
| Wavelength                             | 350             | 980      | 5500   | nm     |
| Insertion Loss <sup>[1]</sup>          | 0.01            | 0.2      | 0.4    | dB     |
| Wavelength Dependent Loss              |                 |          | 0.01   | dB     |
| Polarization Dependent Loss            |                 |          | 0.05   | dB     |
| Polarization Extinction Ratio (PM)     | 22              | 25       | 30     | dB     |
| Return Loss                            | 35              |          |        | dB     |
| Cross Talk On/Off Ratio                | 50              |          | 75     | dB     |
| Optical Rise/Fall Time <sup>[2]</sup>  | 1               | 2        | 3      | ms     |
| Repetition Rate                        |                 |          | 5      | Hz     |
| Repeatability                          |                 |          | ± 0.05 | dB     |
| Durability                             | 10 <sup>8</sup> |          |        | cycles |
| Operating Optical Power <sup>[3]</sup> |                 | 1        | 15     | W      |
| Operating Voltage                      | 45              | 48       | 50     | VDC    |
| Operating Current                      |                 | 30       | 60     | mA     |
| Switching Type                         |                 | Latching |        |        |
| Operating Temperature                  | -40             |          | 80     | °C     |
| Storage Temperature                    | -50             |          | 90     | °C     |

### Notes:

[1] Excluding Connectors. For small core fibers the specs are reduced. For IR fluoride fiber loss increase.

[2]. Rise/Fall time is defined as 10/90% optical signal change.

[3].For 1310/1550nm. The optical power handling rapidly reduces as fiber core size/ reduces.



**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/18/26

[+1 781-935-1200](tel:+17819351200)

[sales@agiltron.com](mailto:sales@agiltron.com)

[www.agiltron.com](http://www.agiltron.com)

# Fiber-Fiber™ Optical Switch 1x1, 1x2

(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents



DATASHEET

## Mechanical Dimensions Slow Type (square shape with slow MEMS,) (Unit: mm)

---

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

**P** +1 781-935-1200

**E** [sales@agiltron.com](mailto:sales@agiltron.com)

**W** [www.agiltron.com](http://www.agiltron.com)

# Fiber-Fiber™ Optical Switch 1x1, 1x2



(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents





## DATASHEET

### Typical Response Speed (SM, Package S)

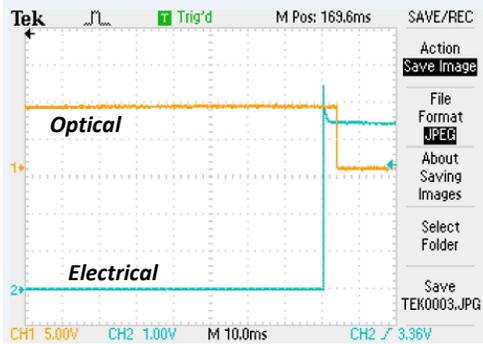
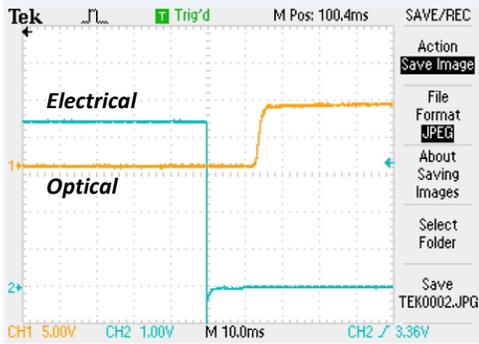


Channel 1 Optical Rise and Fall

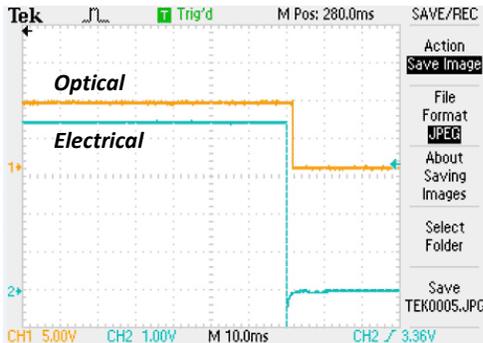
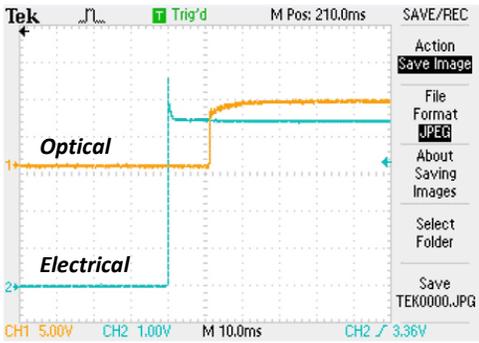


Channel 2 Optical Rise and Fall

### Optical Response Speed (SM Package F)

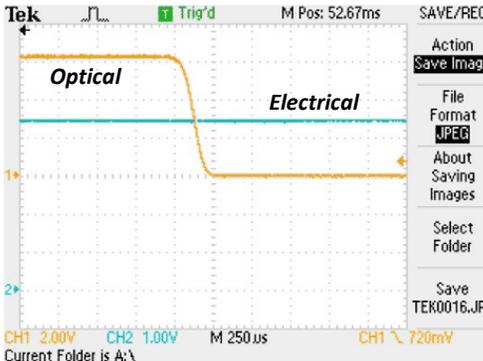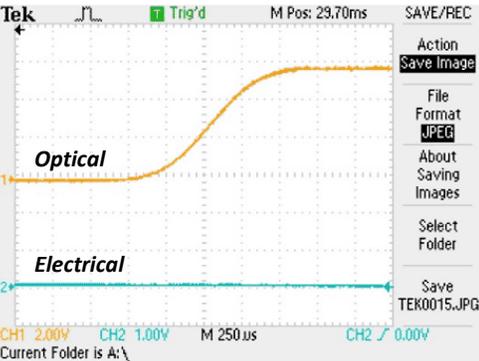

Channel 1 Optical Rise and Fall

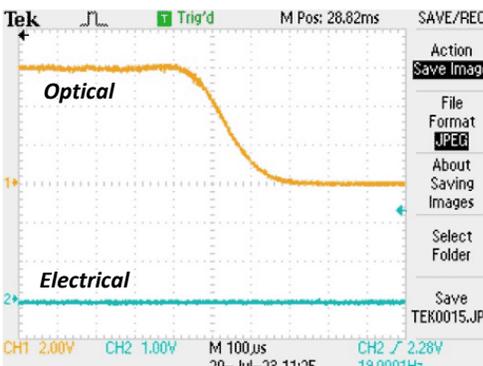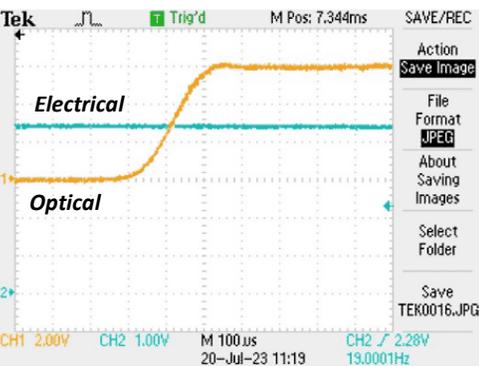

Channel 2 Optical Rise and Fall

# Fiber-Fiber™ Optical Switch 1x1, 1x2



(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents





## DATASHEET

### Typical Response Speed (SM Package F )

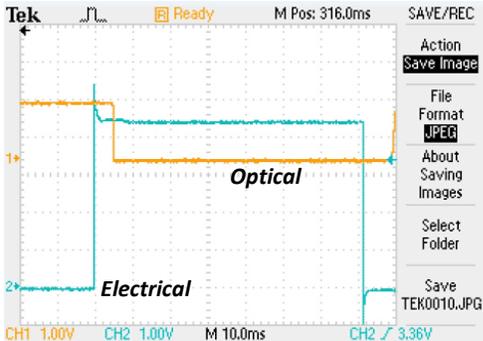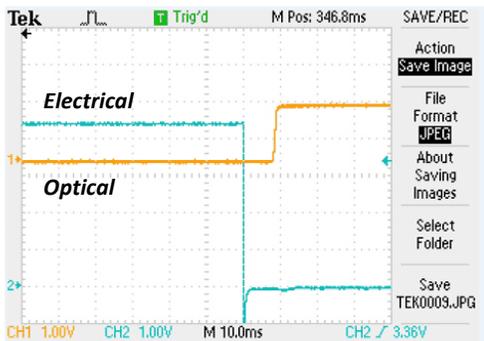

Channel 1 Optical Rise and Fall

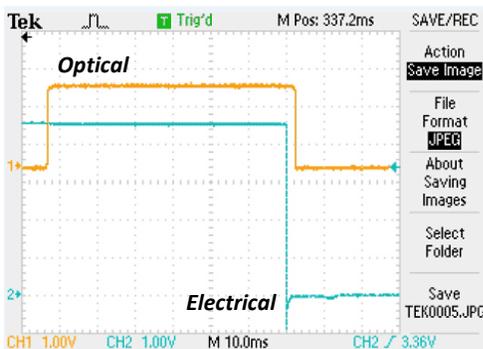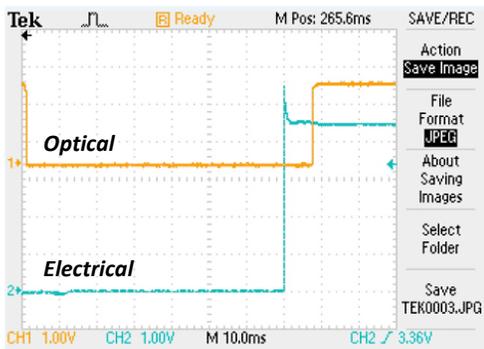

Channel 2 Optical Rise and Fall

### Electrical Connector Configurations

Important Note: The device must be driven by the reference circuit. Otherwise, it is not stable. This is because the device contains a permanent magnet inside; thus current must flow in the correct direction to counter the magnet field.

The load is a resistive coil which is activated by applying 4.5V (draw ~ 40mA). The latching switches can also be driven by a pulse mode for energy saving. The switch can withstand 5V which may reduces its durability.

Agiltron offers a computer control kit with TTL and USB interfaces and Windows™ GUI. We also offer RS232 interface as an option.

#### Latching Type

The activation requires a 4.5V pulse with a duration >15ms

| Optical Path    | Electric Drive |       |
|-----------------|----------------|-------|
|                 | Pin 2          | Pin 3 |
| Port 1 → Port 2 | 4.5V           | 0V    |
| Port 1 → Port 3 | 0V             | 4.5V  |

#### Non-Latching Type

| Optical Path    | Electric Drive |       |
|-----------------|----------------|-------|
|                 | Pin 2          | Pin 3 |
| Port 1 → Port 2 | 0V             | 0V    |
| Port 1 → Port 3 | 0V             | 4.5V  |

# Fiber-Fiber™ Optical Switch 1x1, 1x2


(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents




## DATASHEET


### Functional Diagram

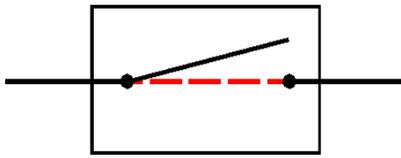

1x1 Switch

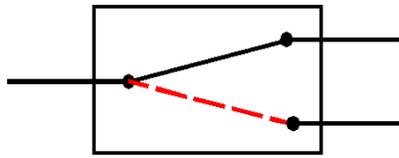


1x2 Switch

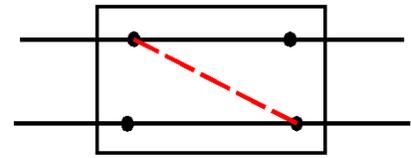

2x2 Bypass Switch

### Optical Power Handling vs Wavelength for Standard SM Fibers

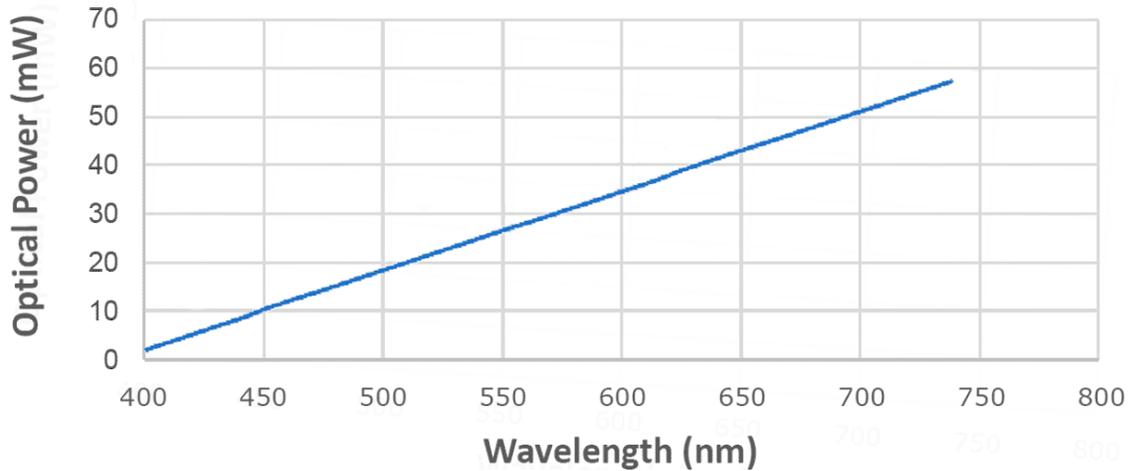

# Fiber-Fiber™ Optical Switch 1x1, 1x2

(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents



## DATASHEET

### Ordering Information (Part Number)

| Prefix       | Type              | Package      | Test Wavelength <sup>[4]</sup>   | Fiber Type   | Fiber Cover                   | Fiber Length                                     | Connector  | Driver                                     |
|--------------|-------------------|--------------|--|--|-------------------------------|--|--|--|
| <b>FFSW-</b> | 1x2 Standard = SP | Latching = L | 488 nm = 4<br>360 nm = A<br>430 nm = B<br>532 nm = 5<br>630 nm = 6<br>780 nm = 7<br>850 nm = 8<br>980 nm = 9<br>1060 nm = 1<br>1310 nm = 3<br>1550 nm = C<br>2000 nm = 2<br>2.3-4.1 μm = F<br>3.2-5.5 μm = G | <i>Pick from below table to match the wavelength range</i> | 900um tube = 3<br>Special = 0 | 0.25m = 1<br>0.5m = 2<br>1.0m = 3<br>Special = 0 | None = 1<br>FC/PC = 2<br>FC/APC = 3<br>SC/PC = 4<br>SC/APC = 5<br>ST/PC = 6<br>LC/PC = 7<br>Duplex LC/PC = 8<br>MTP = 9<br>LC/APC = A<br>LC/UPC = U<br>Special = 0 | Non = 1<br>USB = 2<br>RS232 = 3<br>TTL = 4 |

[1]. Transparent: Light passes through without activation. Opaque: Light is blocked in the non-activated state.

[2]. The beam size expands approximately 5x within the fiber tip.

[3]. Fast latching is available for PM fiber at twice the cost of slow latching.


[4]. This ultra-broadband device is limited by the intrinsic transmission of the fiber and is tested at a single selected wavelength. Testing at multiple wavelengths is available under the "special = 0" option at an additional cost, though it may be unnecessary, as fiber transmission data can be referenced directly from the fiber specifications.

Red: old part numbers

**Fiber Type Selection Table:**

|    |            |    |        |    |             |
|----|------------|----|--------|----|-------------|
| 01 | SMF-28     | 34 | PM1550 | 71 | MM 50/125μm |
| 02 | SMF-28e    | 35 | PM1950 | 72 | MM 62.5μm   |
| 03 | Corning XB | 36 | PM1310 | 73 | 105/125μm   |
| 04 | SM450      | 37 | PM400  | 74 | FG105LCA    |
| 05 | SM1950     | 38 | PM480  | 75 | FG50LGA     |
| 06 | SM600      | 39 | PM630  | 76 | STP 50/125  |
| 07 | 780HP      | 40 | PM850  | 77 | IRZS23      |
| 08 | SM800      | 41 | PM980  | 78 | IRZS32      |
| 09 | Hi980      | 42 | PM780  | 79 |             |
| 10 | Hi1060     | 43 |        | 80 |             |
| 11 | SM400      | 44 | PM405  | 81 | UV180nm     |
| 12 |            | 45 | PM460  | 82 | LMA-PM-10   |
| 13 |            | 46 |        |    |             |

### Typical Fiber Transmissions

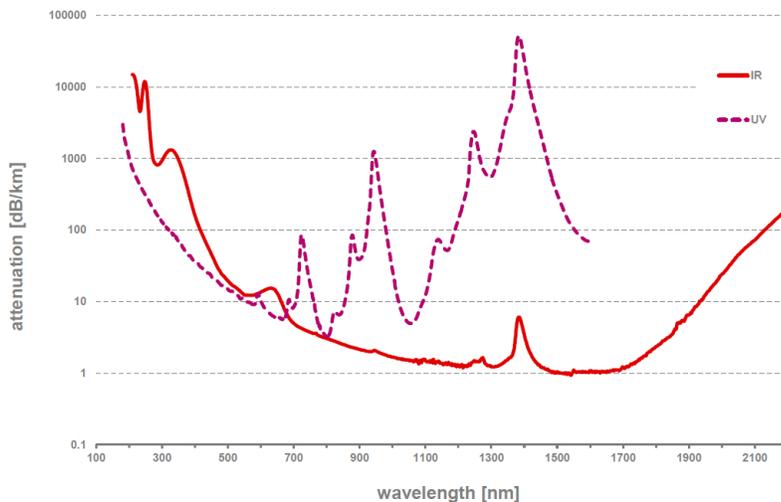

# Fiber-Fiber™ Optical Switch 1x1, 1x2

(105/125 fiber, 15W, Broadband, Bidirectional, 48V)

This product is protected by US Patent 11,125,947 B1 and other pending patents



## DATASHEET

### Driver Reference Design

