

Lithium Niobate Fiber Optical Modulator

(10 GHz, 4.5-5.5V, bias control option)



DATASHEET

[Return to the Webpage](#)




Features

- Low Voltage
- Bias Control
- Feedback

Applications

- Laboratory Uses
- Concept Proving
- Instrumentation

This series of Lithium Niobate fiber optic modulators is designed for laboratory testing, featuring low operating voltage for easy use with a function generator as the driver. It includes a bias control section with an integrated micro-heater and optical power monitor, allowing manual bias adjustment by applying voltage to the heater while monitoring output intensity. An automatic bias control option is available, maintaining V_{π} through slow-speed dithering feedback circuitry. The modulators use a Mach-Zehnder interferometer structure for optical output power modulation, and each modulator comes with field-replaceable RF input connectors for added convenience.

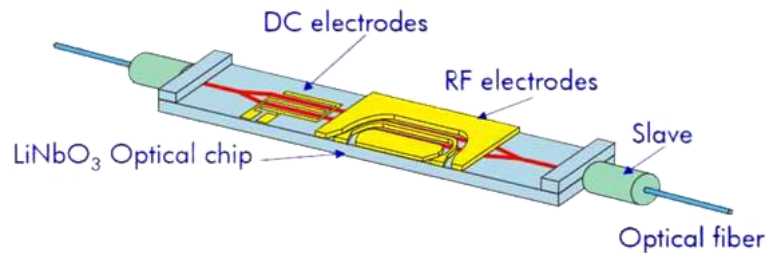

Specifications

Parameter	Min	Typical	Max	Unit
Operation Wavelength	1520		1605	nm
Insertion Loss	4	4.5	5.2	dB
Return Loss	40			dB
Extinction Ratio	15 (H frequency)	20 (H-F)	27 (L frequency)	dB
Optical Input Power			10	mW
RF V_{π} Voltage (at 1KHz)		5	6.5	V
Bandwidth	DC	10	14	GHz
S21 (Electro-Optic Bandwidth-3dB)	10			GHz
S11 (130MHz to 10 GHz)			-10	dB
RF Port Resistance (DC)			40	Ω
RF Input Power			24	dBm
Bias Port Resistance (DC)			1	M Ω
Bias Voltage Range	-15		15	V
Photodetector Responsivity			20	mA/W
Photodetector Extinction Ratio			6	dB
Photodetector Bandwidth		100		kHz
Operating Temperature	-1		70	$^{\circ}$ C
Storage Temperature	-45		85	$^{\circ}$ C

Notes:

Over the maximum power input will burn the device over time

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 03/25/25


Lithium Niobate Fiber Optical Modulator

(10 GHz, 4.5-5.5V, bias control option)



DATASHEET

Dimensions (mm)

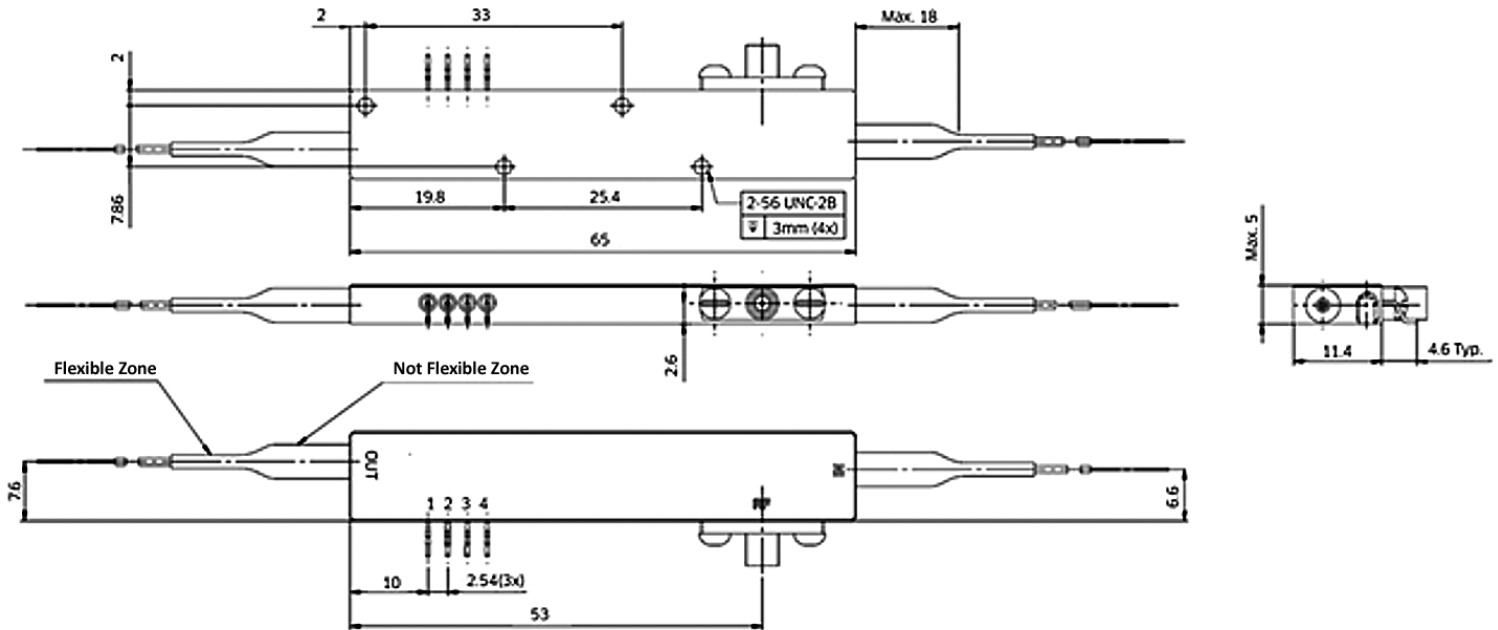

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Connection (RF Input via SMA)

Pin	Description
1	PD cathode
2	PD anode
3	DC bias
4	Ground

Ordering Information

Prefix	Configuration	Bias Control	Wavelength	Frequency	Input Fiber	Output Fiber	Cable	Fiber Length	Connector
LNML-	Amplitude = 1	No = 1 Yes = 2	1520-1620nm = 2 1310nm = 3	10GHz = 1	PM1550 = 5	SMF28e = 1 PM1550 = 5	0.9mm tube = 1 Special = 0	0.5m = 1 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/APC = E LC/UPC = F FC/UPC = U Special = 0


Lithium Niobate Fiber Optical Modulator

(10 GHz, 4.5-5.5V, bias control option)




DATASHEET

Performances

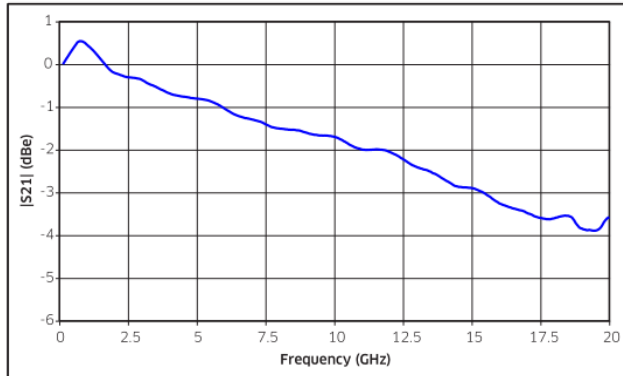

Electro optical response

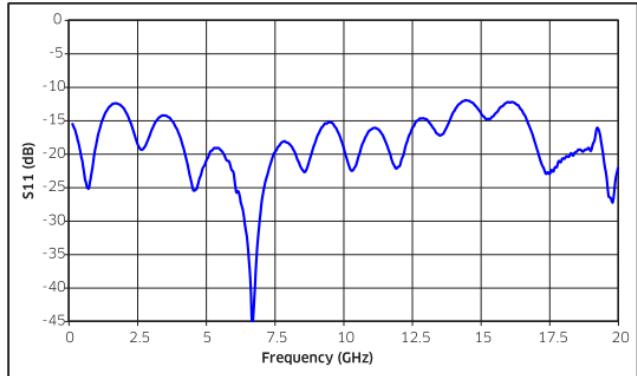

Electrical return loss

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.


Lithium Niobate Fiber Optical Modulator

(10 GHz, 4.5-5.5V, bias control option)




DATASHEET

S21 & S11 (70 GHz)

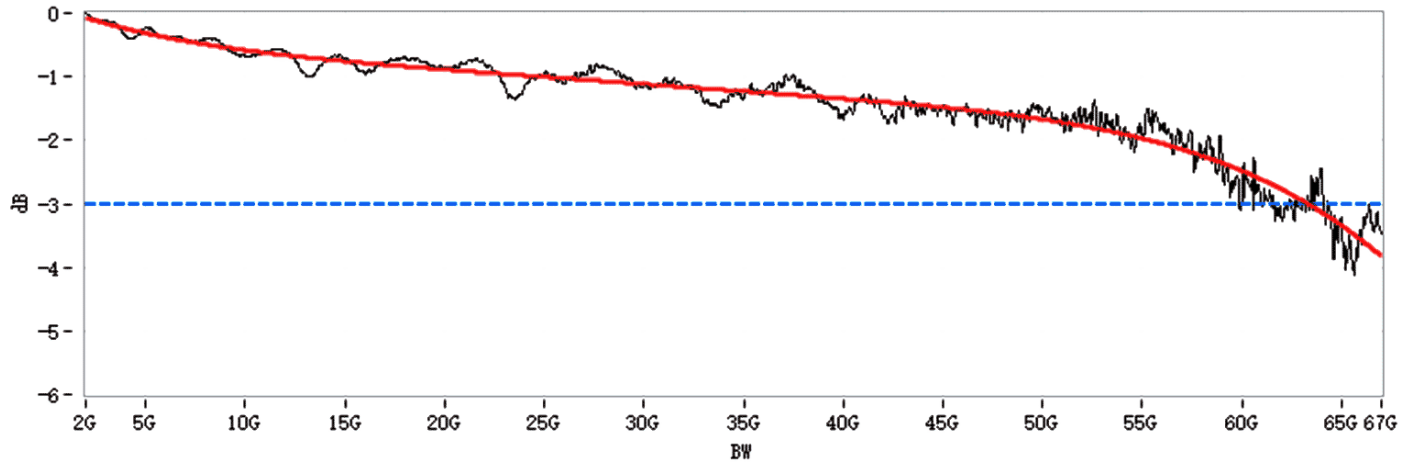

S21

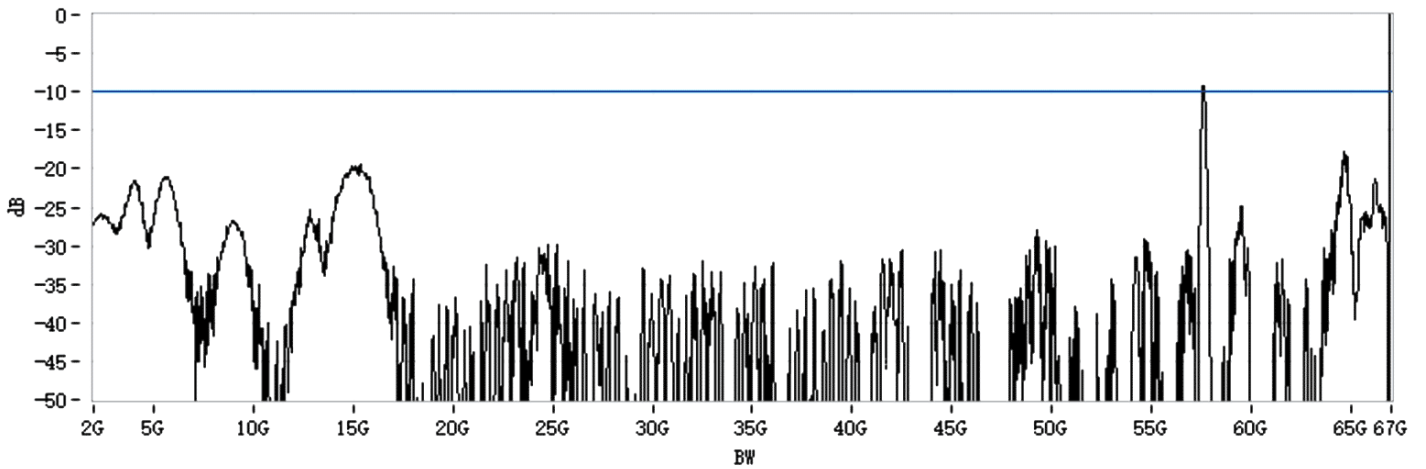

S11


Lithium Niobate Fiber Optical Modulator

(10 GHz, 4.5-5.5V, bias control option)




DATASHEET

S21 & S11 (100 GHz)

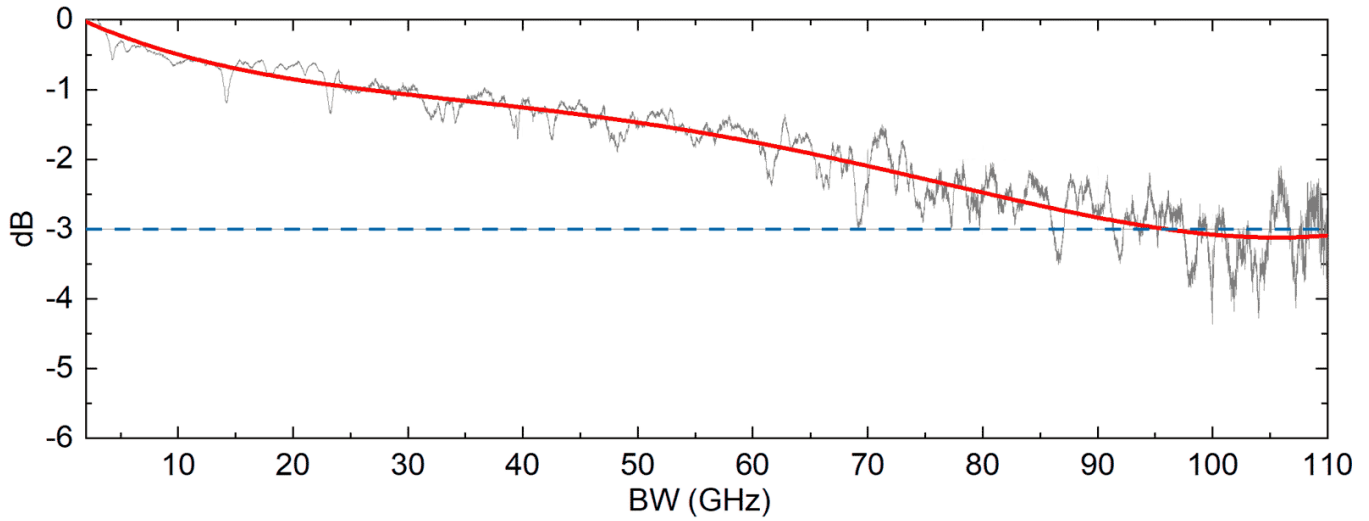

S21

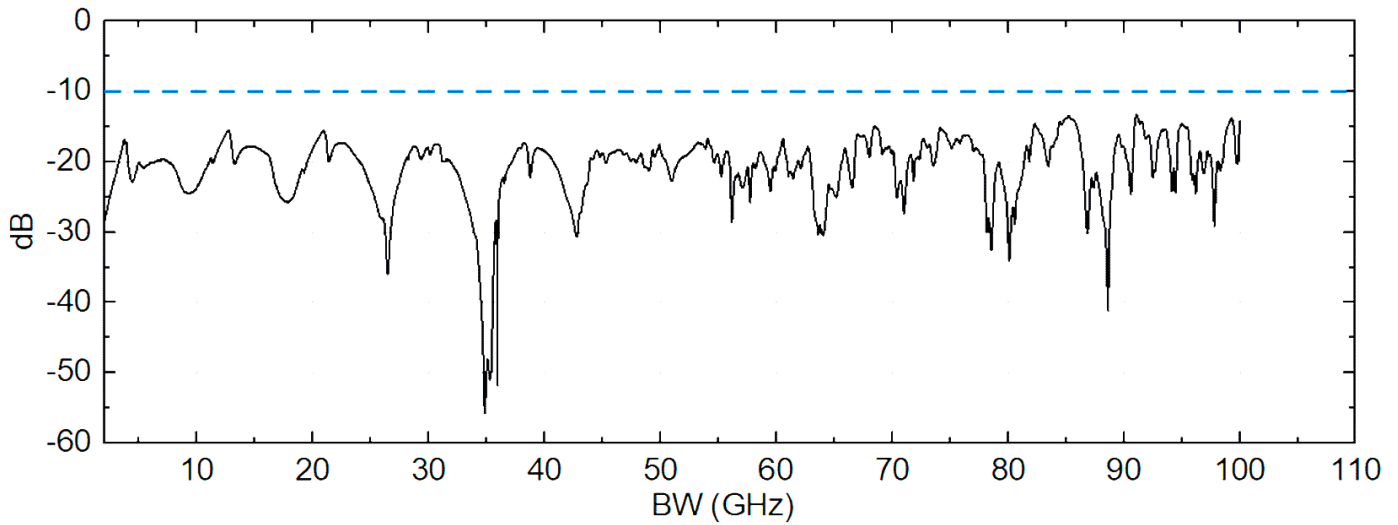

S11

10 GHz Fiber Optical Transmitter/Converter

(0.01 to 10 GHz, analog/digital, auto bias)



DATASHEET

Benchtop Integration



The EOCV series Fiber Optical Transmitters (Electrical-to-Optical Converters) provide high-fidelity analog and digital optical signals from electrical inputs, supporting a wide frequency range of DC to 10 GHz. These user-friendly turnkey modules integrate a Lithium Niobate Fiberoptic Modulator, a DFB laser with driver, an automatic bias controller, high-performance control circuits, and a DC power supply, into a convenient plug-and-play benchtop unit. The benchtop unit features a front switch to select between three modulator bias modes: Peak and Null for high on/off contrast, and Quadrature for superior linearity in E-O conversion. The laser output power is also adjustable via a front rotating knob, allowing users to fine-tune output settings. Designed for RF-over-Fiber applications, as well as the testing and characterization of optical-to-electrical (O-E) devices, the EOCV series offers a versatile and reliable solution for advanced optical communication and signal processing needs.

Ordering Information

Prefix	RF Frequency	Laser Wavelength*	Tunable Laser	Package	RF Amplifier	Fiber Connector
EOCV-	10GHz = 1	1550 nm = 15500 1551.11 nm = 55111 1562.22 nm = 56222 Special = 00000	None = 1	Benchtop = 3 Special = 0	14dBm gain = 1 Non = 2 Special = 0	FC/APC = 2 FC/UPC = U Special = 0

Note:

*Laser on the ITU grid can be selected