

Broadband Low Noise RF Amplifier (LNA)

85KHz-55GHz, 12dB Gain



DATASHEET

[Return to the Webpage](#)



Features

- Frequency: **85KHz-55GHz**
- Psat: +15dBm
- Vout=3.5Vpp
- Small signal gain: 12dB
- Single Power Supply

Applications

- Optical Modulator Driver
- 5G Communication
- Test Equipment
- ROF (RF Over Fiber)
- Radar Communication

The LAND series broadband amplifiers offer high gain, high linearity, low input/output return loss, and a flat gain response, making them ideal for driving optical modulators. The 85kHz-55GHz broadband amplifier delivers an output power of +15dBm with a noise figure (NF) of 5dB, functioning both as a power amplifier and a low-noise amplifier. It requires +8V/100mA DC power and is equipped with a 1.85mm female connector.

Specifications

Parameter	Min	Typical	Max	Unit
Frequency	0.000085		55	GHz
Small Signal Gain(85kHz-50GHz)	10	12		dB
P1dB (10MHz-25GHz)		+13		dBm
Psat (Input=1.4Vpp) (10MHz-25GHz)		+15		dBm
Drain Supply		+8	+12	V
Current		100		mA
NF(1-35GHz)		5		dB
AGC Function		NO		
Input Return Loss		-7		dB
Output Return Loss		-7		dB
Spec Temp		25		°C
Drain Supply		+15		V
RF Input Power		+10		dBm
Input Voltage		2.0		Vpp
Operating Temperature	-40		+85	°C
Storage Temperature	-55		+125	°C
Input Port		1.85mm Female		
Output Port		1.85mm Male		
Case Material		Copper		
Finish		Gold Plated		
Package Sealing		Epoxy Sealed		
Weight		80		g
Size		SEE OUTLINE		



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 10/15/24


Broadband Low Noise RF Amplifier (LNA)

85KHz-55GHz, 12dB Gain




DATASHEET

Diagram Block

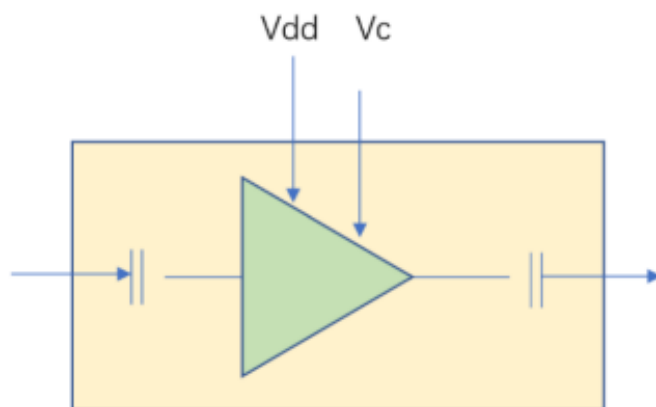

Dimensions (mm)

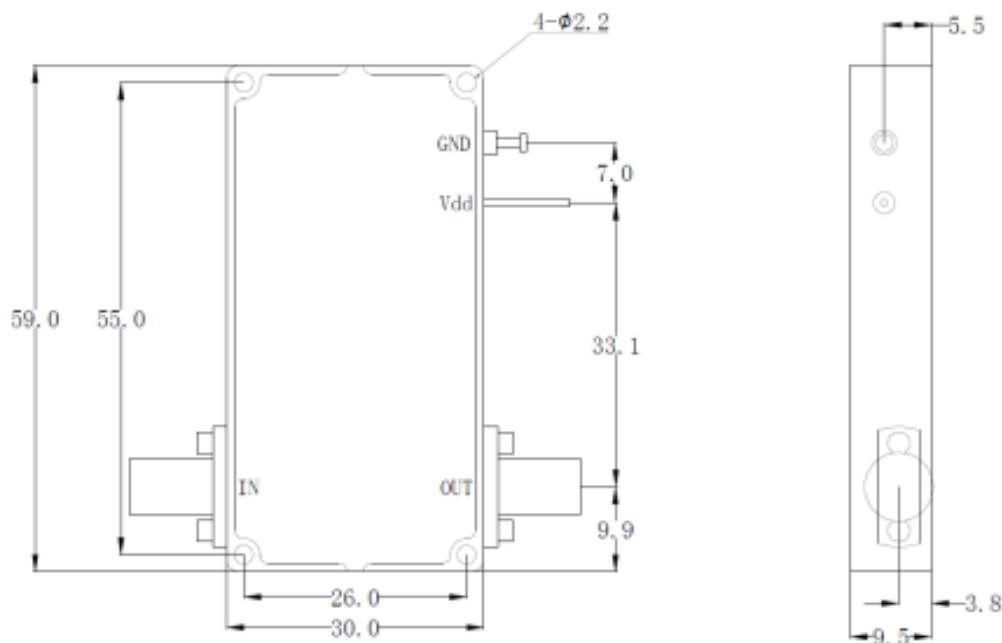

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Length of a	9.4mm	9.5mm	10.8mm	11.3mm


Note: Female Default. Contact with us for other types.

Broadband Low Noise RF Amplifier (LNA)

85KHz-55GHz, 12dB Gain



DATASHEET

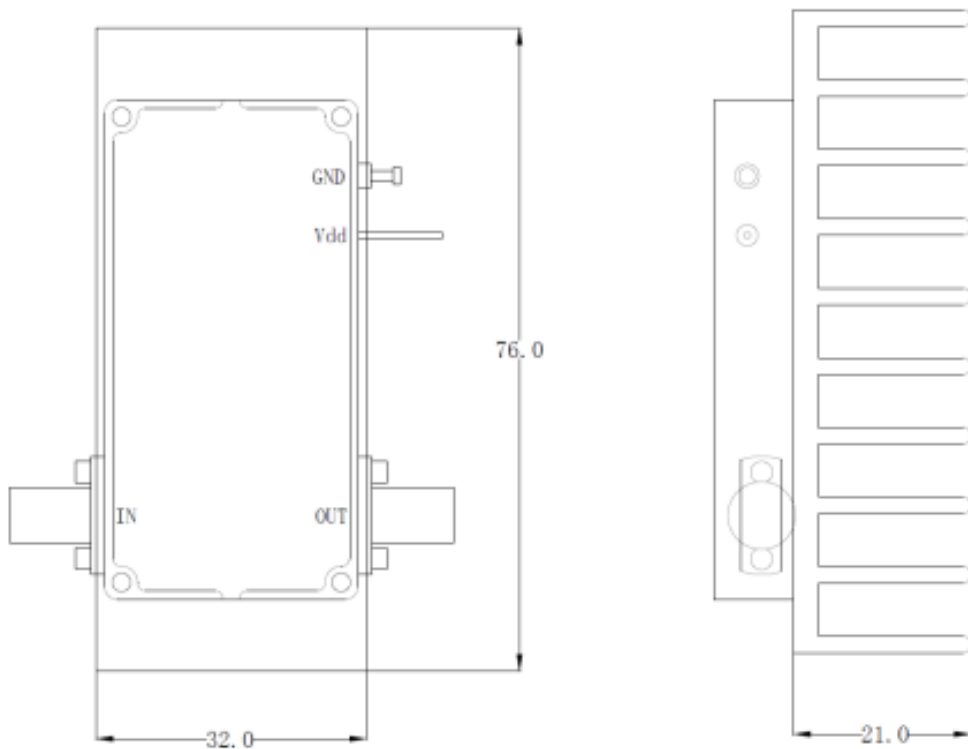

Including a small heatsink without fan if output power higher than +20dBm
Customers can remove it or use their own heatsink according to actual situation.

Broadband Low Noise RF Amplifier (LNA)

85KHz-55GHz, 12dB Gain



DATASHEET

Vpp vs dBm at 50 Ohms System

dBm	Vpp	Vrms	Power (W)	dBm	Vpp	Vrms	Power (W)
50	200.00	70.71	100.00	14	3.17	1.12	2.51E-02
49	178.25	63.02	79.43	13	2.83	1.00	2.00E-02
48	158.87	56.17	63.10	12	2.52	0.89	1.58E-02
50	141.59	50.06	50.12	11	2.24	0.79	1.26E-02
46	126.19	44.62	39.81	10	2.00	0.71	1.00E-02
45	112.50	39.76	31.62	9	1.78	0.63	7.94E-03
44	100.24	35.44	25.12	8	1.59	0.56	6.31E-03
43	89.34	31.59	19.95	7	1.42	0.50	5.01E-03
42	79.62	28.15	15.85	6	1.26	0.45	3.98E-03
41	70.96	25.09	12.59	5	1.12	0.40	3.16E-03
40	63.25	22.36	10.00	4	1.00	0.35	2.51E-03
39	56.37	19.93	7.94	3	0.89	0.32	2.00E-03
38	50.24	17.76	6.31	2	0.80	0.28	1.58E-03
37	44.77	15.83	5.01	1	0.71	0.25	1.26E-03
36	39.91	14.11	3.98	0	0.63	0.22	1.00E-03
35	35.57	12.57	3.16	-1	0.56	0.20	7.94E-04
34	31.70	11.21	2.51	-2	0.50	0.18	6.31E-04
33	28.25	9.99	2.00	-3	0.45	0.16	5.01E-04
32	25.18	8.90	1.58	-4	0.40	0.14	3.98E-04
31	22.44	7.93	1.26	-5	0.36	0.13	3.16E-04
30	20.00	7.07	1.00	-6	0.32	0.11	2.51E-04
29	17.83	6.30	0.79	-7	0.28	9.99E-02	2.00E-04
28	15.89	5.62	0.63	-8	0.25	8.90E-02	1.58E-04
27	14.16	5.01	0.50	-9	0.22	7.93E-02	1.26E-04
26	12.62	4.46	0.40	-10	0.20	7.07E-02	1.00E-04
25	11.25	3.98	0.32	-11	0.18	6.30E-02	7.94E-05
24	10.02	3.54	0.25	-12	0.16	5.62E-02	6.31E-05
23	8.93	3.16	0.20	-13	0.14	5.01E-02	5.01E-05
22	7.96	2.82	0.16	-14	0.13	4.46E-02	3.98E-05
21	7.10	2.51	0.13	-15	0.11	3.98E-02	3.16E-05
20	6.32	2.24	0.10	-16	0.10	3.54E-02	2.51E-05
19	5.64	1.99	7.94E-02	-17	8.93E-02	3.16E-02	2.00E-05
18	5.02	1.78	6.31E-02	-18	7.96E-02	2.82E-02	1.58E-05
17	4.48	1.58	5.01E-02	-19	7.10E-02	2.51E-02	1.26E-05
16	3.99	1.41	3.98E-02	-20	6.32E-02	2.24E-02	1.00E-05
15	3.56	1.26	3.16E-02	-21	5.64E-02	1.99E-02	7.94E-06

Broadband Low Noise RF Amplifier (LNA)

85KHz-55GHz, 12dB Gain



DATASHEET

Ordering Information *

	0008	55	12	5	5	<input type="checkbox"/>
Prefix	Low Frequency	High Frequency	Gain	NF	P1dB	Module*
LNAD-	85KHz = 0008	55GHz = 55	12dB =12	5dB = 5	15dBm = 5	No = 0 Yes = 1