

Single or Dual 1xN Fiber Optic Switch Module

(0.3dB low loss, all fiber type, all wavelength, bidirectional, N up to 300, 70dB on/off)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

[Return to the Webpage](#)



The LBSM Series optical fiber switch delivers exceptionally low insertion loss — typically around 0.3 dB — regardless of array size, and supports up to 300 fiber ports in a compact, bidirectional architecture. Compatible with any fiber type and covering a broad wavelength band from 300 nm to 2300 nm, the LBSM switch is ideal for testing environments requiring consistent optical performance. It is available in single- and dual-channel configurations, with dual channels operating simultaneously. For PM fiber versions, the switch maintains both polarization axes identically to the input fiber. Uniform optical paths are ensured across all output ports. The device is controlled via RS232 or USB and comes with intuitive graphical software. A full command set is provided for custom integration, and optional code-writing services are available to assist customer engineers with interface development.

Applications

- Test
- Bio-Tech
- Instrumentation

Features

- Ultra Low Insertion Loss
- All Fiber Types
- High Modal Fidelity

Specifications

Parameter		Min	Typical	Max	Unit
Operation Wavelength	UV-VIS	200		2000	nm
	MWIR	1000		5000	
	LWIR	7000		12000	
Wavelength Band ^[1]		100	300	500	nm
Insertion Loss ^[2]			0.3	0.5	dB
Wavelength Dependence Loss			0.15	0.3	dB
Polarization Dependent Loss			0.05	0.1	dB
Cross Talk On/Off Ratio			70		dB
Extinction Ratio (PM Fiber)		18		23	dB
Return Loss	APC	55		60	dB
Repeatability			0.05	0.1	dB
Switch Time			80	200	ms
Durability		10 ⁷			cycle
Optical Power Handling			300	2000	mW
Operating Temperature		-5		65	°C
Storage Temperature		-40		85	°C
Power Supply		110 ~ 220			VAC
Package Type		2U 19" Mount Rack			

Notes:

- [1]. Cover the entire operation wavelength range of each single mode fiber
- [2]. Measured without connectors.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 05/08/25

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Single or Dual 1xN Fiber Optic Switch Module

(0.3dB low loss, all fiber type, all wavelength, bidirectional, N up to 300, 70dB on/off)


(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET


Dual Channel Optical Configuration

Two fiber channels are grouped to switch simultaneously. This is a cost effective configuration than using two 1xN switches.

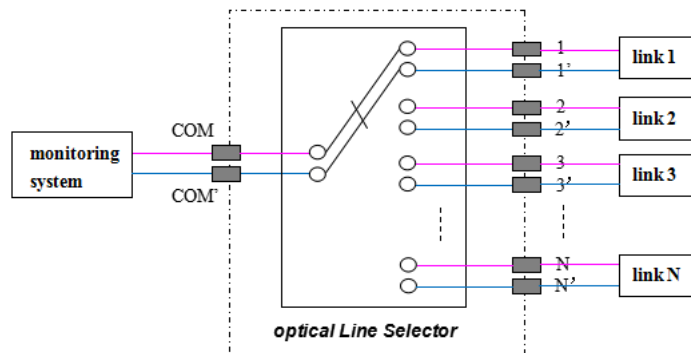

Parallel Testing Configuration

In many cases, valuable signal source and analysis instrumentation can be used more effectively in a parallel-test configuration. For example, multiple cables or components can be tested together during temperature cycling. On the other hand, an increasing use of inherently parallel components, as for optical interconnections for 40G or 100G using 10 Gb/s components, calls for identical testing in multiple paths. These are well supported by the 1x13 switch configuration and the 13th path can often be used as a permanent reference path.

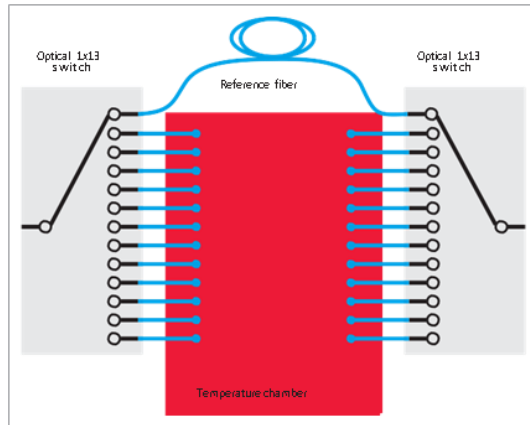

Module Mechanical Dimensions

2RU 19" mount rack typically. The input and output connectors are on the front panel, while the control interface and power supplier are on the rear panel.

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Single or Dual 1xN Fiber Optic Switch Module


(0.3dB low loss, all fiber type, all wavelength, bidirectional, N up to 300, 70dB on/off)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

Typical Graphic User Interface

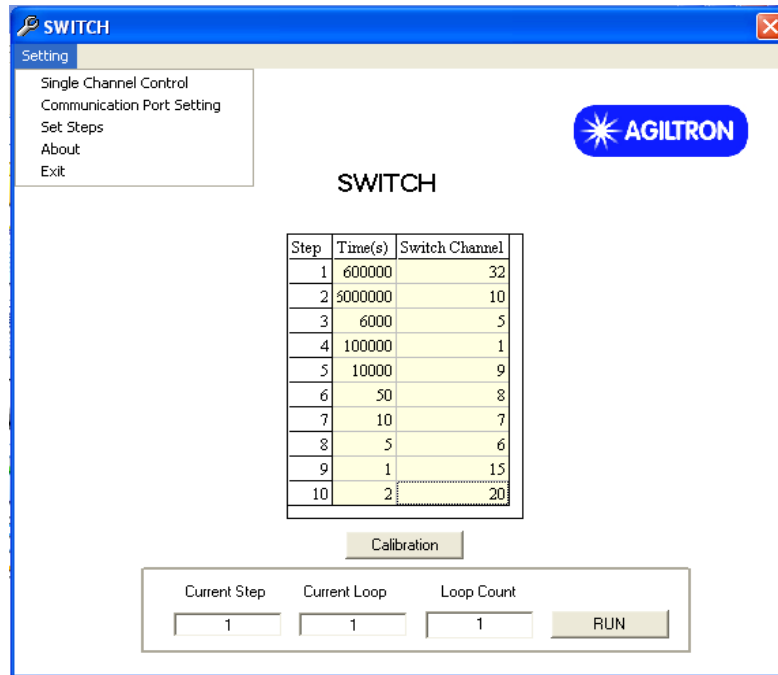

Control Interface and Power Supply

- RS 232
- Ethernet 10/100 with definable IP address
- USB
- GUI
- 110-220V (0.6 A) Power Input

Single or Dual 1xN Fiber Optic Switch Module

(0.3dB low loss, all fiber type, all wavelength, bidirectional, N up to 300, 70dB on/off)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)



DATASHEET

Ordering Information

☐	☐	☐	☐	☐	☐	☐	☐
Prefix	Type	Wavelength	Switch Type	Optical Power	Package ^[1]	Fiber Type	Connector
LBSM-	1x4 = 004 1x8 = 008 1x16 = 016 1x32 = 032 1x64 = 064 1x128 = 128 1x256 = 256 Special = 000	488 nm = 4 360 nm = A 430 nm = B 532 nm = 5 630 nm = 6 780 nm = 7 850 nm = 8 980 nm = 9 1060 nm = 1 1310 nm = 3 1550 nm = C 2000 nm = 2	Single Channel = 1 Dual Channel = 2	0.5W = 1 1W = 2 3W = 3 5W = 5	Standard 2RU = 1 Special = 0	Select below	FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 Quad LC/PC = 9 LC/APC = A LC/UPC = U Special = 0

[1]. Rack Mount Depth ~ 430mm.

Fiber Type Selection Table

01	SMF-28	34	PM1550	71	MM 50/125μm
02	SMF-28e	35	PM1950	72	MM 62.5μm
03	Corning XB	36	PM1310	73	105/125μm
04	SM450	37	PM400	74	FG105LCA
05	SM1950	38	PM480	75	FG50LGA
06	SM600	39	PM630	76	STP 50/125
07	780HP	40	PM850	77	IRZS23
08	SM800	41	PM980	78	IRZS32
09	SM980	42	PM780	79	
10	Hi1060	43		80	
11	SM400	44	PM405	81	UV180nm
12		45	PM460		
13		46			