

OPTICAL SWITCHES WITH NO MOVING PARTS FOR SPACE APPLICATIONS

David Poudereux & Juan Barbero
ALTER TECHNOLOGY

J. Manuel G. Tijero & Ignacio Esquivias
Universidad Politécnica de Madrid

Iain Mackenzie
European Space Agency

→ MOTIVATION

The objective of this activity is to examine the suitability of **solid state fiber optic switches** to meet future space applications and define a complete technology development and space qualification roadmap for the most suitable solid state optical switch technology for future satellite payloads.

The use of **solid state switching greatly improves the reliability of optical switch technology** when compared with the use of bulky mechanical switching systems. In addition to this benefit solid state switching can provide faster switching speeds which is required in SpaceFiber and in some optical switching applications.

→ INITIAL SURVEY

Literature survey & Questionnaire details as follows

- Technical requirements for different applications
- Operating principles, advantages and inconveniences of different technologies
- Identification of potential manufacturers



Applications

- CO2 Monitoring Lidar
- Atom Sensor(750 and 1580nm)
- Optical Sensing
- Digital Communications
- Local Oscillator-Distribution
- Optical Communications (5KWpeak, 10W and 100mW)
- Optopyrotechnics
- Laser Interferometry



Technologies

- ✓ Bulk Electro-optic (B-EO),
- ✓ Waveguide Electro-optic (WG-EO),
- ✓ Magneto-optic (MO)
- Acousto-optic (AO)
- ✓ Liquid Crystal (LC)
- Thermo-optic (TO)


→ MECHANICAL TEST

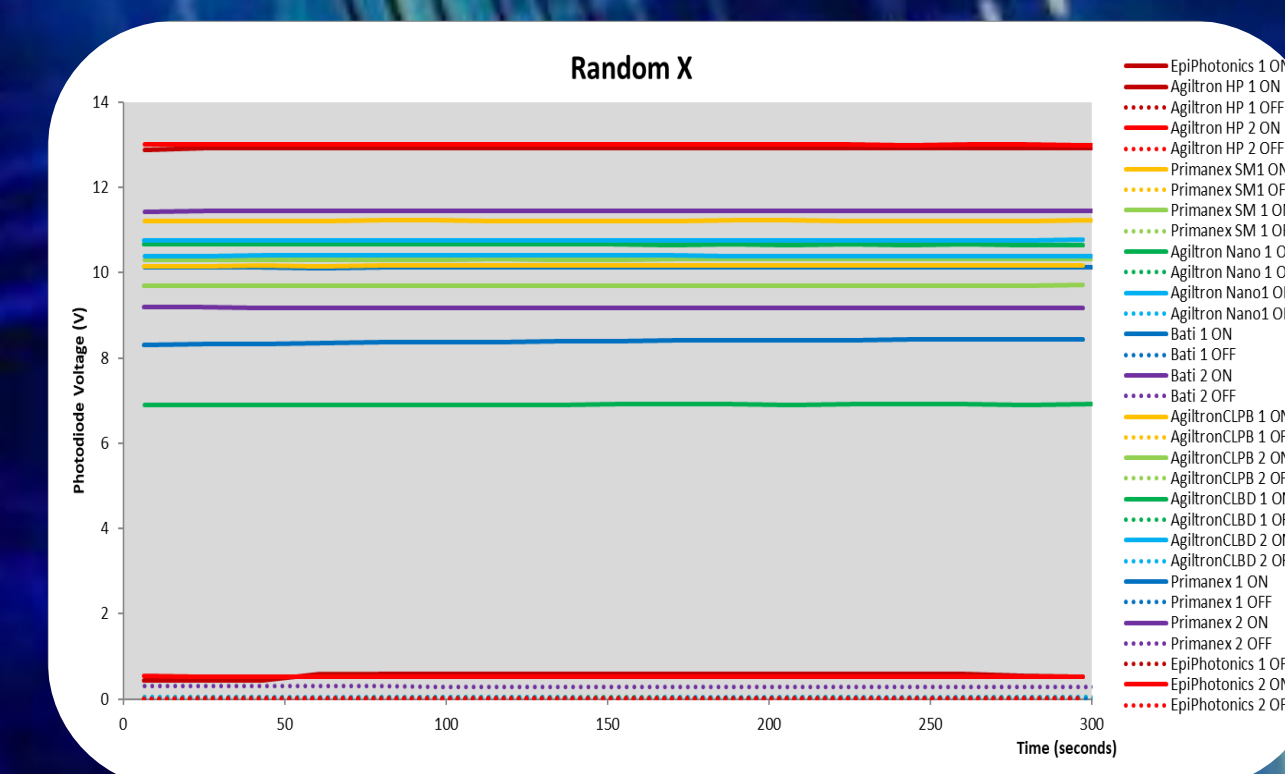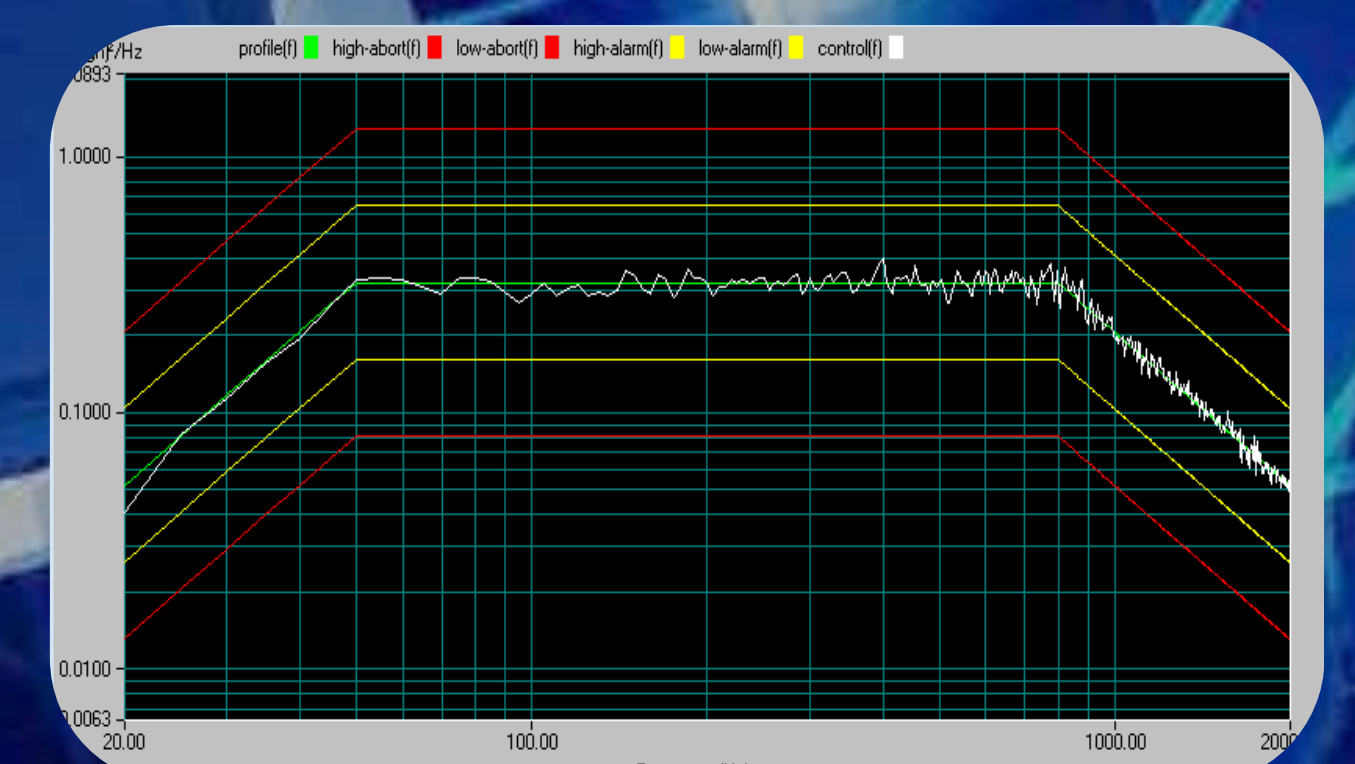

→ THERMAL VACUUM

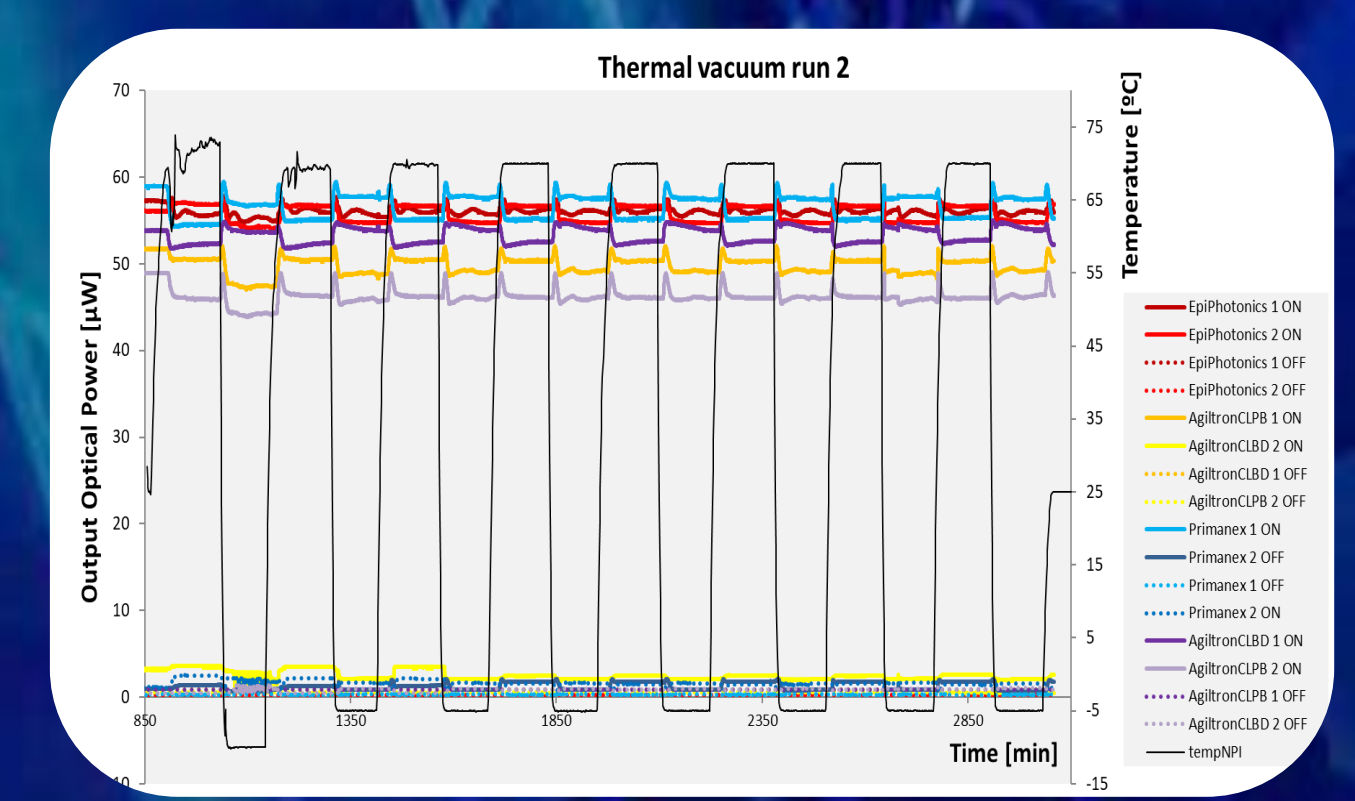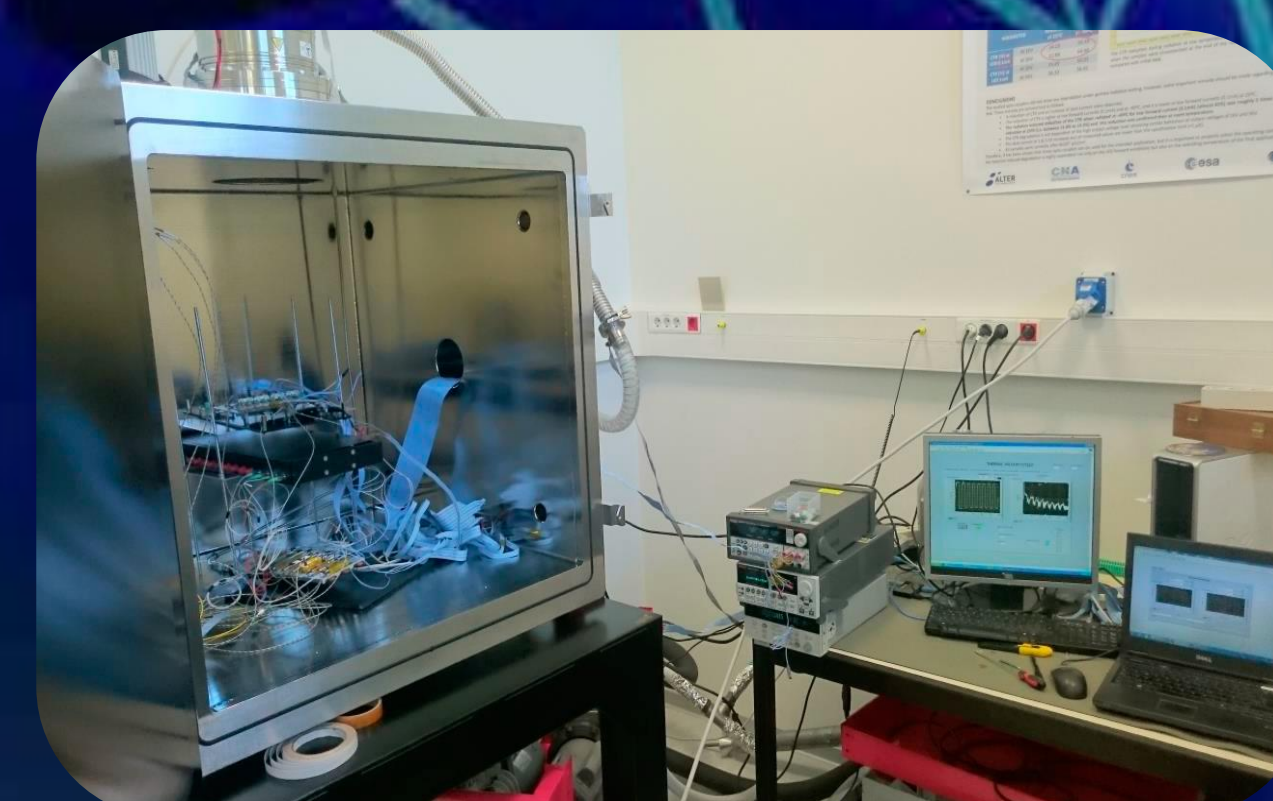

→ RADIATION

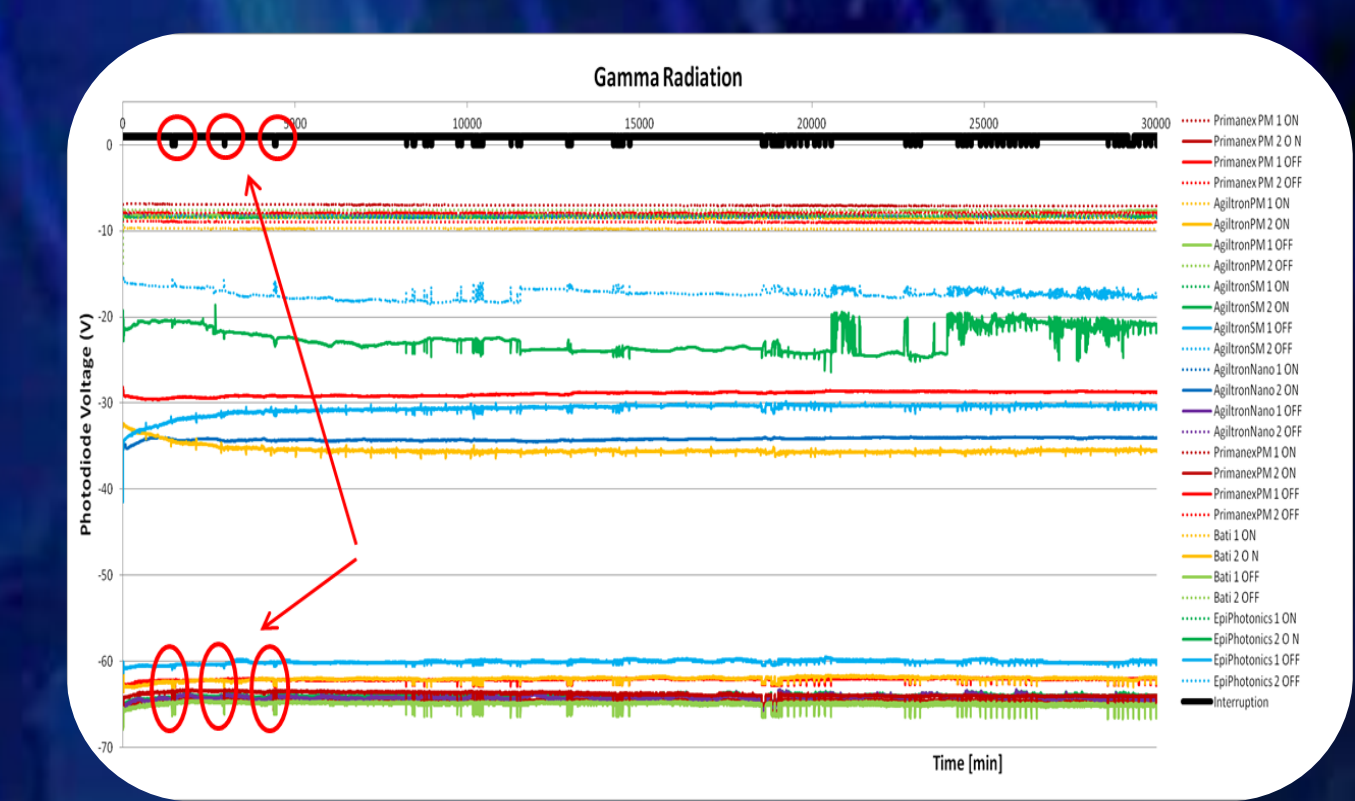

→ TEST FLOW

Initial EO		Electro-optical Measurement and Inspection
		- Insertion Loss
		- Crosstalk
		- Response Time
		- PDL / PER
Validation	Mechanical Test	Vibration
		Shock Test
	Vacuum	Monitored Vacuum Cycles
	Thermal	
	Radiation	Gamma Radiation Monitoring
Final DPA	Destructive Physical Analysis	

→ CONCLUSIONS AND RECOMMENDATIONS

Solid state optical switches with no moving parts are **excellent candidates for space applications**, specially Bulk Electro-Optics and Magneto Optics technologies. They respond very well under typical space conditions as radiation, vibration, shocks and thermal vacuum.

The temperature should be maintained constant. The Consortium recommends the switches based on MO or B-EO for space applications. B-EO should be used for applications requiring high switching speed and MO for those requiring a minimum crosstalk

→ ACKNOWLEDGMENTS

This project has been funded by European Space Agency, ITT AO/1-8427/15/NL/RA/ZK "Optical Switch for Space Applications with No Moving Parts"

→ RESULTS

- The optical switches are **more sensible to temperature than mechanical or gamma radiation**
- **All the tested samples**, except EpiPhotonic (WG-EO) switch, **passed all the tests**. This failure is not inherent to the WG-EO technology (easy to solve)
- No differentiation has been found between Polarization Maintaining fibers and Single Mode fibers