

High Polarization Extinction Fiber Circulator 1310/1550

PER~29, 50dB isolation, PM Fiber



DATASHEET

[Return to the Webpage](#)




Features

- Low Insertion Loss
- High Isolation
- Low PDL
- High Reliability
- Low Cost

Applications

- Optical Fiber Amplifier
- Pump Laser Source
- Fiber Optic Sensor
- Instrumentation

The OIHE Series Optical Circulator is a passive device that transmits light in the forward direction at 1310 or 1550 nm while minimizing back reflection and backscattering in the reverse direction for any state of polarization. Utilizing Agiltron's proven micro-optic design, it uniquely delivers ultra-high polarization extinction ratio (PER), low insertion loss, high isolation, compact size, and exceptional stability. These Telcordia-qualified components offer superior performance and reliability, making them ideal for use in optical fiber sensor systems. The OIHE Series is available in both single- and dual-stage isolation configurations.



Specifications (λ_c , 23°C, no connector)

Parameter	Min	Typical	Max	Unit
Operation Wavelength	1310	1310 $\pm$ 15		nm
	C Band	1550 $\pm$ 15		
	L Band	1585 $\pm$ 15		
Insertion Loss	Single Stage	0.3	0.6	dB
	Dual Stage	0.5	0.8	
Isolation	Single Stage	30	41 [1]	dB
	Dual Stage	50	65 [1]	
Polarization Extinction Ratio (PER)	25	27	30	dB
Return Loss (Input/Output)	55	60		dB
Operating Temperature	-5		+70	°C
Storage Temperature	-40		+85	°C
Optical Power Handling		0.4	5	W

[1]. At the peak wavelength which the device performance is optimized

Note: For a polarized input light version, the isolation is optimized to block the light reflection of the same polarization. Although lights of other polarizations may also be blocked, the extinction may be poor. PM isolators can be specially made to block backward propagating lights of all polarizations. PM isolators can also be made with a light polarizing function.

Warning: This is an OEM module designed for system integration. Do not touch the PCB by hand. The electrical static can kill the chips even without a power plug-in. Unpleasant electrical shock may also be felt. For laboratory use, please buy a Turnkey system.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 10/29/25

High Polarization Extinction Fiber Circulator 1310/1550

PER~29, 50dB isolation, PM Fiber



DATASHEET

Mechanical Dimensions (mm)

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information

Prefix	Type	Wavelength	Power	PER	Fiber Type	Fiber Cover	Fiber Length	Connector ^[1]
OIHE-	Single Stage = 11 Dual Stage = 22	1310 = 3 C Band = C L Band = L Special = 0	Standard = 1 1W = 2 5W = 5	25dB = 5 27dB = 7 29dB = 9	SMF-28 = 1 PM 1550 = 5 PM1310 = 3 Special = 0	Bare Fiber = 1 900µm Tube = 2	0.25m = 1 0.5m = 2 1.0m = 3 1.5m = 4 2.0m = 5 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U High Power FC/PC ^[1] = H High Power FC/APC ^[1] = C

[1]. The connector maintains a high polarization extinction ratio (PER) of approximately 28 dB and is priced at \$78 each. For higher power applications, the High-Power High-PER Connector is available at \$290 each. This version operates in matching pairs to ensure optimal performance and safety. When ordering a High-Power Connector, a corresponding patch cable should also be included. The patch cable features the same High-Power Connector on one end and a bare fiber on the other, allowing convenient splicing into the system.

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 µm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.


High Polarization Extinction Fiber Circulator 1310/1550

PER~29, 50dB isolation, PM Fiber



DATASHEET

Isolation vs Wavelength

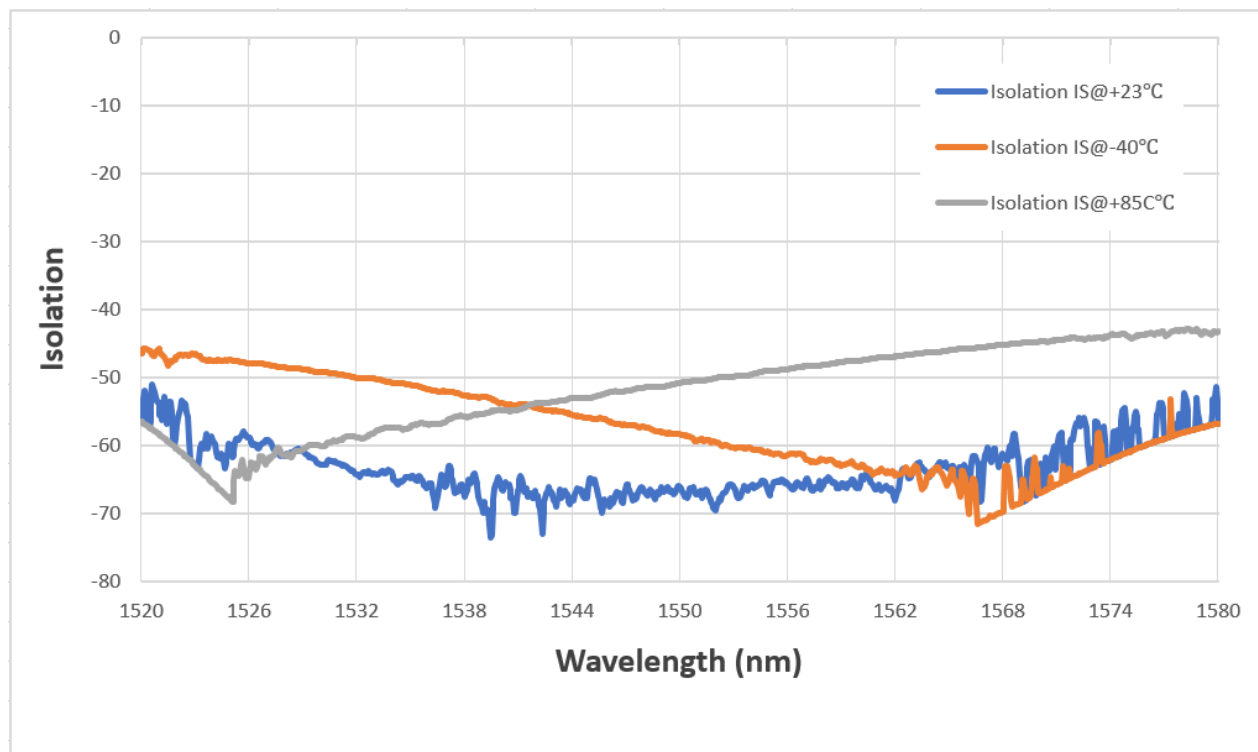




High Polarization Extinction Fiber Circulator 1310/1550

PER~29, 50dB isolation, PM Fiber



DATASHEET

Typical Wavelength Dependence for Single Stage

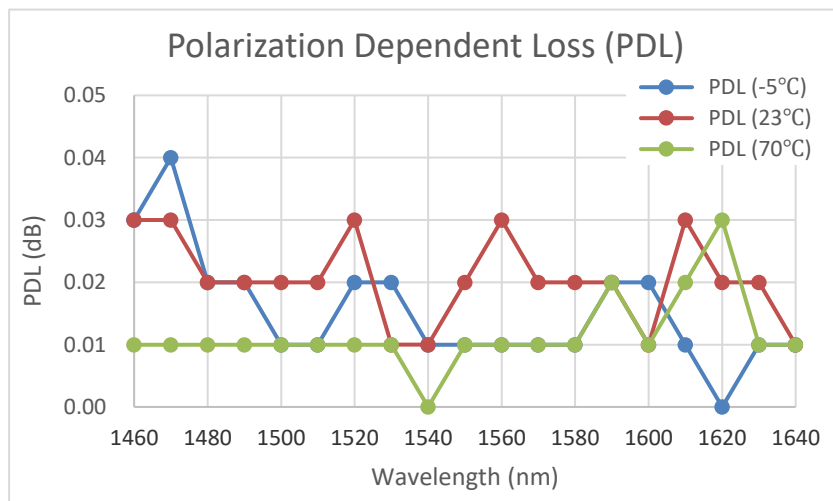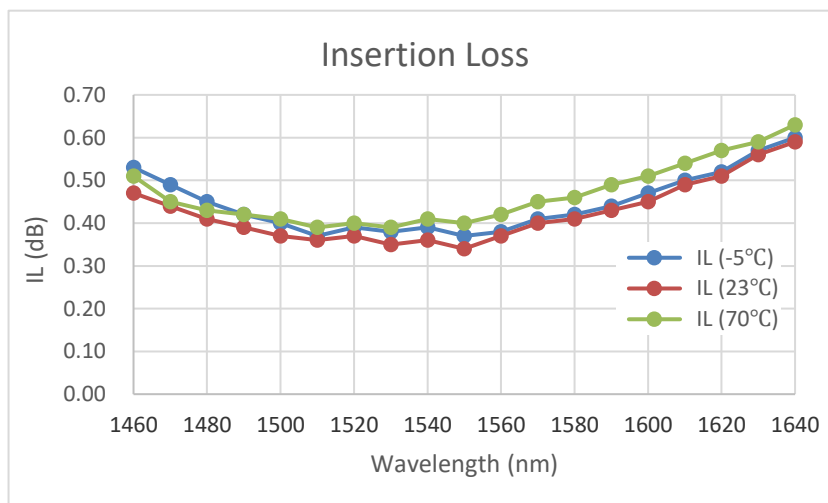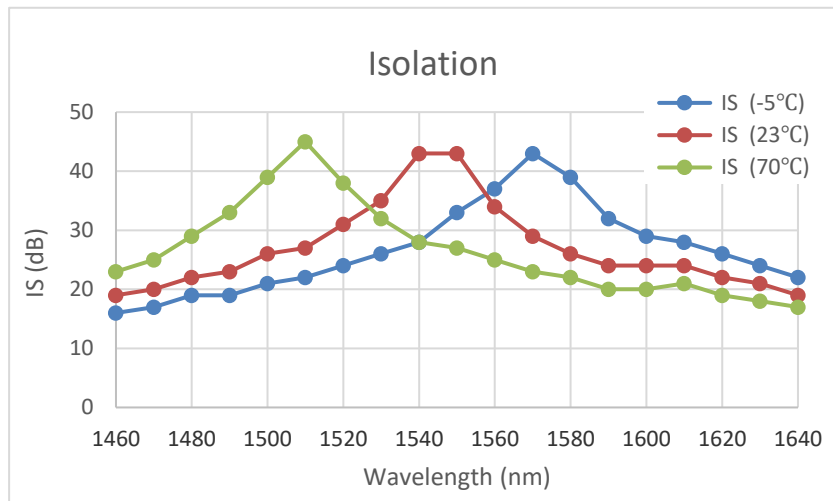

High Polarization Extinction Fiber Circulator 1310/1550

PER~29, 50dB isolation, PM Fiber



DATASHEET

Typical Wavelength Dependence for Dual Stage

