

# 1310 / 1550 nm Polarization Maintaining Optical Circulator



DATASHEET

BUY NOW



The OC Series 1310/1550 PM Optical Circulator is a non-reciprocal device that maintains polarization while redirecting light at 1310/1550 nm from port-to-port in only one direction while minimizing back reflection and back scattering in the reverse direction. Employing Agiltron's advanced micro optics design, it features low insertion loss, high extinction ratio, high isolation, compact package, and high stability. The excellent characteristics of this product make it an ideal choice for application in fiber amplifier systems, pump lasers, and optical fiber sensors.

## Features

- Low Insertion Loss
- High Extinction Ratio
- High Channel Isolation
- Compact Package
- High Reliability & Stability
- Cost Effective

## Applications

- Optical Fiber Amplifier
- Metropolitan Area Network
- Fiber Optic Sensor
- Dispersion Compensation
- Test and Measurement
- Instrumentation

## Specifications

Parameter	Min	Typical	Max	Unit
Operation Wavelength	1310±15, C-Band or L-Band			nm
Insertion Loss <sup>1</sup> @ $\lambda_{op}$ , Top, SOP (1→2, 2→3)			0.8	dB
Channel Isolation <sup>2</sup> (2→1, 3→2)	38	45		dB
Wavelength Dependent Loss		0.15		dB
Extinction Ratio	18	22		dB
Directivity (1→3)		>50		dB
Return Loss <sup>1</sup>		>50		dB
Polarization Alignment	Both slow and fast axis			
Optical Power Handling	Maximum: 500			mW
Tensile Load	Maximum: 5			N
Operating Temperature Range	0 ~ 70			°C
Storage Temperature	-40 ~ 85			°C
Fiber Type	Panda PM 1550			
Fiber Length	> 1			m
Package Dimension	ø5.5 x 34(L)			mm

### Note:

1. Excluding connectors
2. @ $\lambda_{op}$ , Top, SOP
3. Fast axis alignment available

**Note:** For a polarized input light version, the isolation is optimized to block the light reflection of the same polarization. Although lights of other polarizations may also be blocked, the extinction may be poor. PM isolators can be specially made to block backward propagating lights of all polarizations. PM isolators can also be made with a light polarizing function.

**Warning:** This is an OEM module designed for system integration. Do not touch the PCB by hand. The electrical static can kill the chips even without a power plug-in. Unpleasant electrical shock may also be felt. For laboratory use, please buy a Turnkey system.

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.


Rev 04/02/24

# 1310 / 1550 nm Polarization Maintaining Optical Circulator



## DATASHEET

### Mechanical Dimensions (mm)

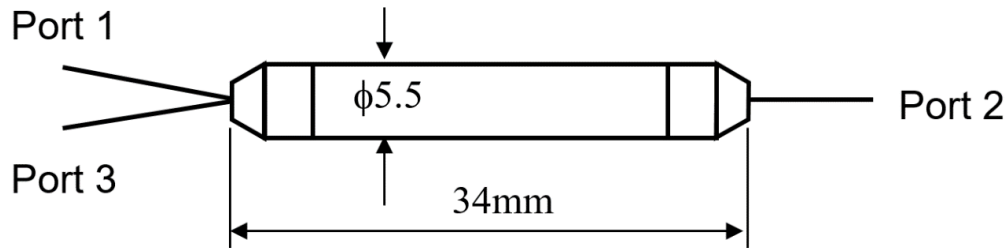

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### Ordering Information

Prefix	Type	Wavelength	Grade	Package	Fiber Type	Fiber Cover	Fiber Length	Connector
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>OCPM-</b>	3 Port = 30 Special = 00	1310 = 3 1550 = 5 C band = C L Band = L C+L = 2 Special = 0	Standard = 1 Special = 0	33 mm = 5 34-39 mm = 2 50 mm = 1 Special = 0	PM1550 = B Panda 80 = C Special = 0	Bare fiber = 1 900um loose tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

**NOTE:**

- PM1550** fiber works well for **1310nm**

### Application Notes

#### Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

#### Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

#### Maximum Optical Input Power




Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

# 1310 / 1550 nm Polarization Maintaining Optical Circulator



## DATASHEET

### Typical Wavelength Dependence for Single Stage

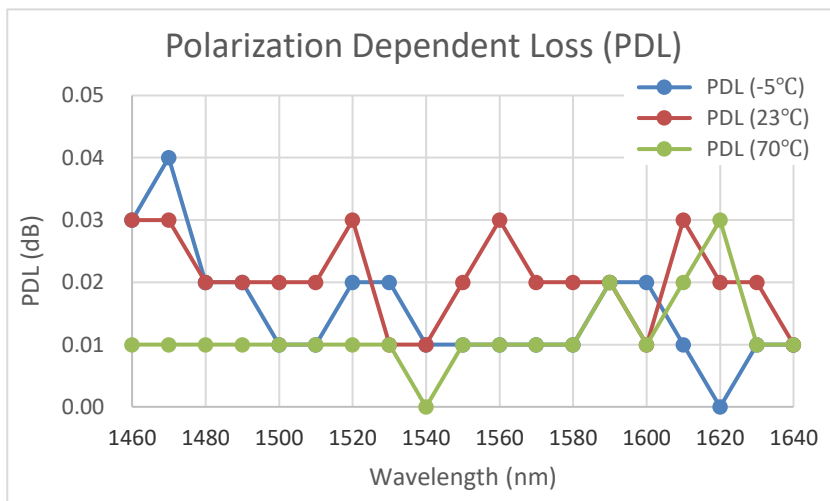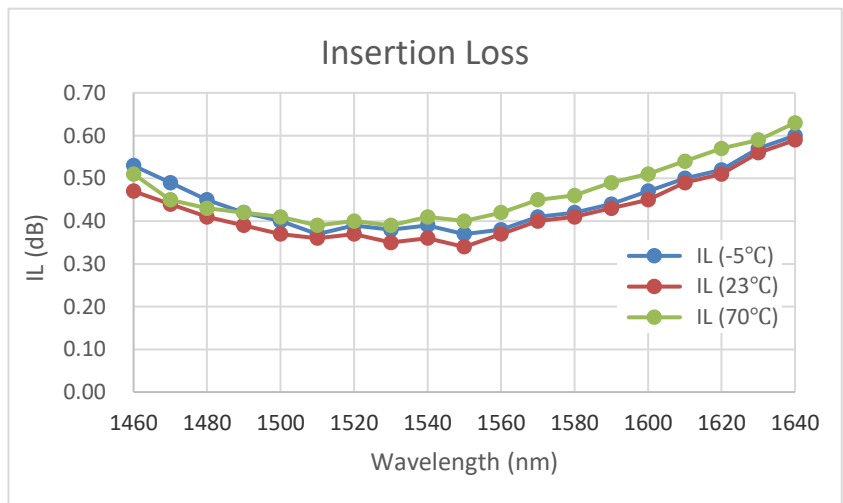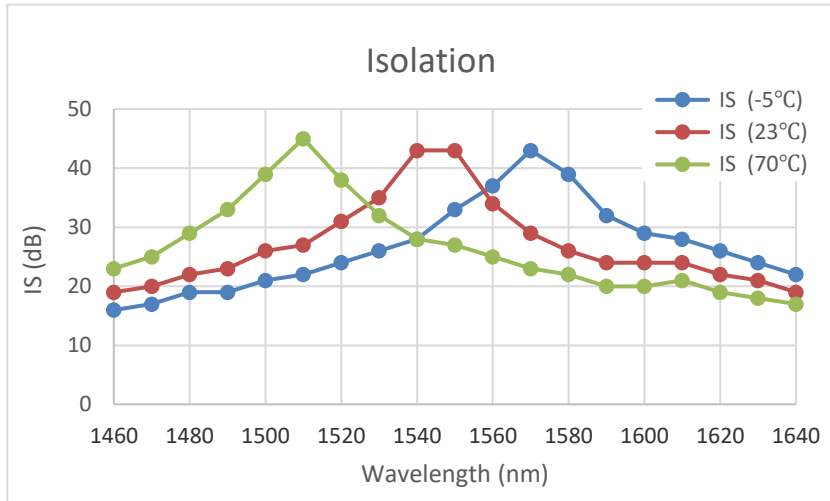

# 1310 / 1550 nm Polarization Maintaining Optical Circulator



## DATASHEET

### Typical Wavelength Dependence for Dual Stage

