

BUY NOW 

1550nm 2x2 Coupler With Reduced Cladding PM Fiber

(patents pending)

Product Description

Agiltron's 2x2 Polarization Maintaining (PM) Coupler are used for monitoring or splitting optical signal in Reduced Cladding Polarization Maintaining fiber. With Agiltron's advanced micro-optic design, it features low insertion loss, epoxy-free optical path, high extinction ratio, compact package, and high reliability and stability. These high quality components have excellent characteristics, making them an ideal choice for application in fiber amplifier systems, pump lasers, and optical fiber sensors.



Features

- Low Insertion Loss
- Epoxy-free Optical Path
- High Extinction Ratio
- Compact Package
- Cost Effective

Performance Specifications



CPRP 2x2 RC PM Coupler	Specification	Unit
Operating Wavelength (λ_o)	1550 \pm 20	nm
Split Ratio *	50:50	%
Maximum Excessive Insertion Loss (Over λ_o , 23°C, excluding connector)	\leq 0.6	dB
Peak Extinction Ratio (Over λ_o , 23°C)	\geq 22	dB
Minimum Extinction Ratio (Over λ_o , 23°C)	\geq 20	dB
Polarization Dependant Loss	\leq 0.2	dB
Polarization Alignment **	Fast Axis	
Optical Fiber	RC Panda PM Fiber (80 μ m/165 μ m)	
Operating Temperature	0 - +70	°C
Storage Temperature	-40 - +85	°C
Optical Power Handling	\leq 300	mW
Package Dimensions	\varnothing 3.5xL28 or \varnothing 5.5xL34	mm
* Split ratio from 1% to 49% also available		
** Optional alignment to slow axis		

Applications

- Optical Fiber Amplifier
- Fiberoptic Sensor
- Instrumentation

1550nm 2x2 Coupler With Reduced Cladding PM Fiber

Package Dimensions

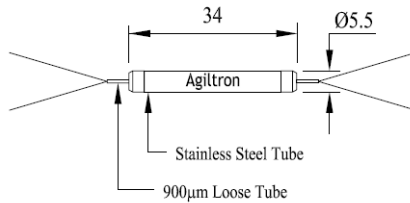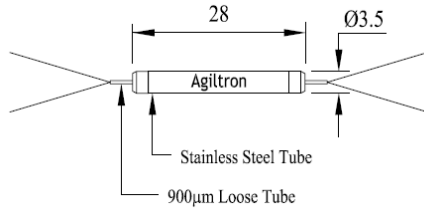

Ordering Information

CPRP-	22	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Type	Wavelength	Grade	Package Type	Fiber Type	Fiber Length	Connector Type	
2x2 Configuration=22	1550±20nm=5 Special=0	Standard=1 Special=0	Ø3.5x28=1 Ø5.5x34=2 Special=0	Panda RC 80/165=1 Special=0	Bare Fiber=1 900µm Loose Tube=3 Special=0	0.25m=1 0.5m=2 1.0m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Special=0

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.