

1x2 /2x2 Single Mode Broadband Fiber Coupler/Splitter

(SM28, 1260-1620nm)



DATASHEET

BUY NOW



Features

- Wavelength Independent
- Low Insertion Loss
- Low PDL
- Highly Stable & Reliable
- Ultra Low Cost

Applications

- Optical communications
- FTTX
- Local Access Network (LAN)
- Fiberoptic Instrumentation

The FC Series fiber optic coupler is based on Agiltron's fused biconical taper technology, and compact packaging structure. It features good uniformity, low excess loss and very low polarization sensitivity. The device is ideal for splitting or combining light with exceptional performance over a wide wavelength range.

Couplers are highly efficient in splitting light with little loss, about 0.2dB per joint, but incur significant losses when combining lights; for example, a 50/50 coupler produces a 50% loss to each beam when combined. For beam-combining applications, search Combiner.

Specifications

Parameter	Premium	Grade A	Unit	
Splitting Ratio	0.5/99.0 to 50/50			
Bandwidth	1260-1620		nm	
Excess Loss ^[1]	0.07	0.1	dB	
Insertion Loss ^[1]	50/50	3.4/3.4	dB	
	40/60	4.4/2.5	dB	
	30/70	5.6/1.8	dB	
	20/80	7.5/1.2	dB	
	10/90	10.8/0.6	dB	
	5/95	14.6/0.4	dB	
	4/96	16.0/0.3	dB	
	3/97	17.5/0.3	dB	
	2/98	19.0/0.2	dB	
	1/99	21.5/0.2	dB	
	0.5/99.5	23.0/0.2	24.0/0.3	dB
Polarization Dependent Loss	0.2	0.2	dB	
Return Loss	>50	>55	dB	
Directivity	>55		dB	
Optical Power Handling	5		W	
Fiber Type	SM28e			
Operating Temperature	-40~85		°C	
Storage Temperature	-50~85		°C	
Package Dimension *	Bare fiber: (ø)3x(L)40 / (ø)3x(L)54 900um loose tube: (ø)3x(L)70 900um loose tube / 2mm / 3mm Cable: (L)90x(W)16x(H)9		mm	

Notes:

[1]. Without connector. Each connector adds 0.3dB and 0.5dB for short wavelength

* Other package options available on request

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 08/02/24


1x2 /2x2 Single Mode Broadband Fiber Coupler/Splitter

(SM28, 1260-1620nm)



DATASHEET

Mechanical Dimensions (mm)

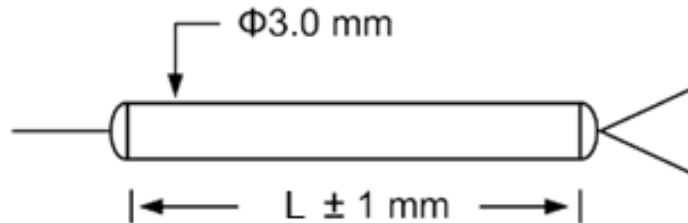

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information

Prefix	Port	Wavelength	Grade	Package	Splitting Ratio	Fiber Type	Fiber Cover	Fiber Length	Connector
FCBB-	1x2 = 1 2x2 = 2	1260-1625nm = 1 Special = 0	P Grade = P A Grade = A	54(L) = 1 70(L) = 2 90(L) = 3 40(L) = 4 Special = 0	01/99 = 1 02/98 = 2 05/95 = 3 10/90 = 4 20/80 = 5 30/70 = 6 40/60 = 7 50/50 = 8 0.5/99.5 = 9 3/97 = A 4/96 = B Special = 0	SM28 = 1 SM1950 = 2	250µm Coat = 1 900µm Tube = 2 3mm Cable = 4 Special = 0	0.5m = 1 0.7m = 2 1.0m = 3 Special = 0	None = 0 FC/PC = 1 FC/SPC = 2 FC/APC = 3 FC/UPC = 4 SC/SPC = 5 SC/APC = 6 SC/UPC = 7 ST = 8 MU = 9 LC/PC = A LC/APC = B LC/UPC = C