

# 1x3 Monolithic Single Mode Coupler



## DATASHEET

[Return to the Webpage](#)

The FCTM series 1x3 Monolithic Single Mode Coupler utilizes Agiltron's fused biconical taper technology and compact packaging to deliver exceptional optical performance. With superior uniformity, low excess loss, and minimal polarization sensitivity — achieved through precision automated fabrication — this device is ideal for high-performance light splitting or combining across a broad wavelength range. Standard operating wavelengths include 1310 nm, 1490 nm, and 1550 nm, with dual- and triple-band configurations also available. Custom wavelengths, fiber types, and splitting ratios can be provided upon request to meet specific application requirements, subject to a development fee. The coupler is housed in a compact 3 mm diameter, 54 mm long tube, making it well-suited for space-constrained integration.

## Features

- Compact Size
- Ultra Low Excess Loss
- Various Split Ratio
- Low Polarization Sensitivity
- Highly Stable & Reliable
- Low Cost

## Specifications

Parameters	Typical								Unit
Model	S		W		D		T		
Operating Wavelength	1310, 1550				1310/1550		1310/1490/1550		nm
Operating Bandwidth	±15		±40		±40		1310±40,1490±10, 1550±40		nm
Grade	P	A	P	A	P	A	P	A	
Typical Excess Loss	0.10	0.15	0.10	0.15	0.10	0.15	0.10	0.15	dB
Insertion Loss	≤5.4	≤5.7	≤5.6	≤6.0	≤5.8	≤6.2	≤5.8	≤6.2	dB
PDL	≤0.20	≤0.25	≤0.20	≤0.25	≤0.25	≤0.30	≤0.25	≤0.30	dB
Uniformity	≤0.8	≤1.2	≤1.0	≤1.4	≤1.2	≤1.5	≤1.2	≤1.5	dB
Return Loss	≥50								dB
Directivity	≥55								dB
Operating Temperature	-20 ~ +70								°C
Storage Temperature	-40 ~ +85								°C
Pigtail Type	250μm Bare Fiber				900μm Loose Tube				

### Notes:

- [1]. Without connector. Each connector adds 0.3dB and 0.5dB for short wavelength
- [2]. Without connector. Each connector adds 5dB

## Applications

- Telecommunications
- Sensor
- Instrumentation

**Note:** The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.


Rev 06/24/25

# 1x3 Monolithic Single Mode Coupler



## DATASHEET

### Mechanical Dimensions (mm)

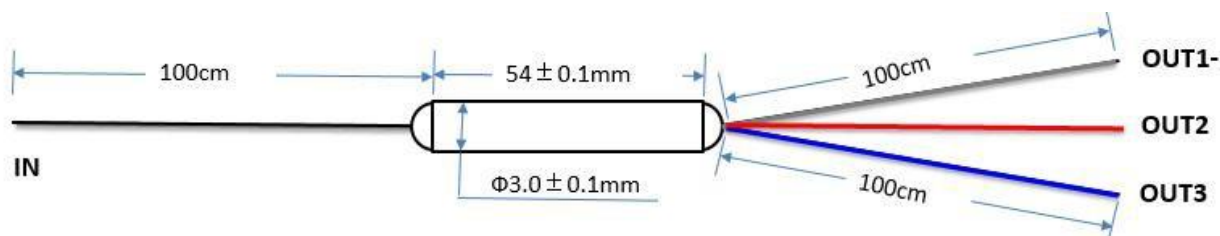

\*OUT1 is highest output port.

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### Ordering Information

Prefix	Type	Wavelength	Grade	Coupling Ratio	Fiber Type	Fiber Cover	Connector
FCTM-	S = S W = W D = D T = T	1310 = 3 1480 = 4 1550 = 5 1310/1550 = A 1310/1480/1550 = B Special = 0	A = A P = P	30/30/30 = 333 1/98/1 = 191 2/96/2 = 292 3/94/3 = 393 Special = 0	SMF-28 = 1 Special = 0	Bare fiber = 1 900um tube = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/UPC = U Special = 0