

Narrow Linewidth Semiconductor Lasers



<10kHz Linewidth, 1550nm




The NLLD narrow-linewidth tunable fiber-coupled laser features a <10 kHz spectral linewidth with wavelength tunability, utilizing a semiconductor gain chip and an external tunable silicon waveguide cavity for superior performance. With an ultra-long coherence length (~100 km), it enables high-precision interferometric and long fiber sensing while its low spectral noise enhances SNR for detecting weak signals in interferometry and backscatter-based sensing. Its low phase noise and high stability make it ideal for atomic clocks, quantum sensing, gravimeters, fiber optic gyroscopes (FOGs), LiDAR, and Doppler velocimetry, while minimal frequency drift ensures long-term measurement stability. Integrated driving electronics allow precise output power and wavelength control, making it a highly reliable solution for cutting-edge scientific and industrial applications.

We offer driving electronics to precisely control both the output power and wavelength.

Features

- Single Mode, Wavelength (C, L)
- Ultra-Low Noise
- Ultra-Low Relative Intensity Noise (RIN)
- Low Susceptibility to Vibration and Noise
- Narrow Linewidth (<10 kHz)
- Long Coherent Length
- Wavelength Stability Over Lifetime and Temperature

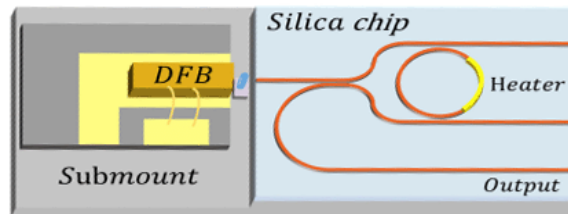

Applications

- Quantum Sensing
- Long Range Sensing
- Lidar, FOG
- Optical Inspection
- Scientific Research



Specifications

Parameter	Min	Typical	Max	Unit
Output power	20	40		mW
Center wavelength (Custom)	1530	1550	1565	nm
Thermal frequency tuning range	50			GHz
Frequency modulation range	800	1000		MHz
RIN @100kHz		-135		dB/Hz
Phase Noise @100kHz		-130		dB/Hz
Operating temperature range	10		50	°C
Optical isolation	40			dB
Power supply	5.7	5.9	6.5	V
Fiber	PM/FC/APC, 1m			
Spectral linewidth	Grade 1	≤ 10		kHz
	Grade 2	≤ 5		
	Grade 3	≤ 3		

Rev 01/27/25

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


Narrow Linewidth Semiconductor Lasers



<10kHz Linewidth, 1550nm


DATASHEET

Mechanical Dimension (mm)

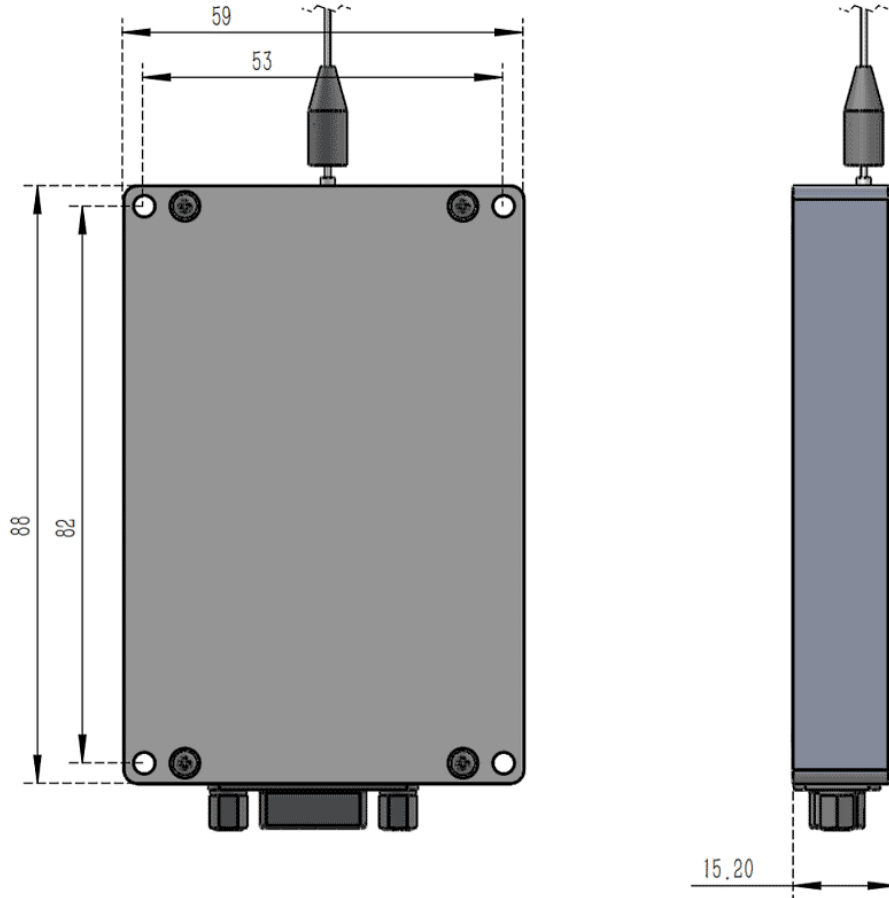

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

PIN Assignment

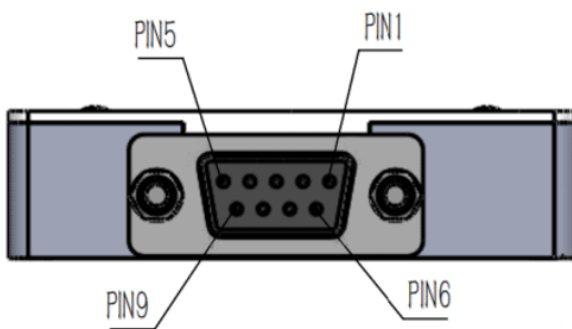

PIN	Description	PIN	Description
1		6	
2		7	
3		8	
4		9	
5			


Narrow Linewidth Semiconductor Lasers




<10kHz Linewidth, 1550nm

DATASHEET

Relative Intensity Noise (RIN)

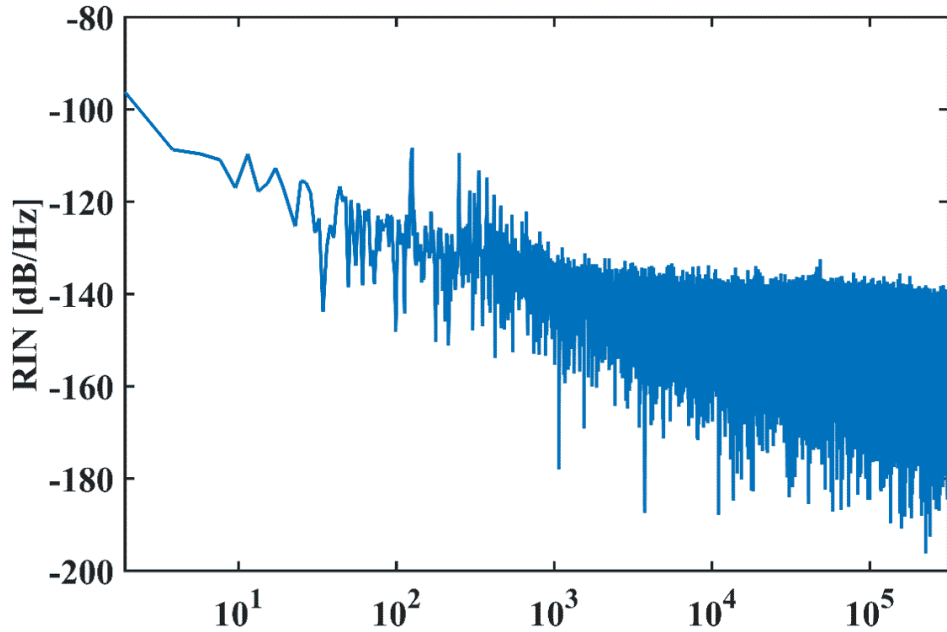

Frequency stability

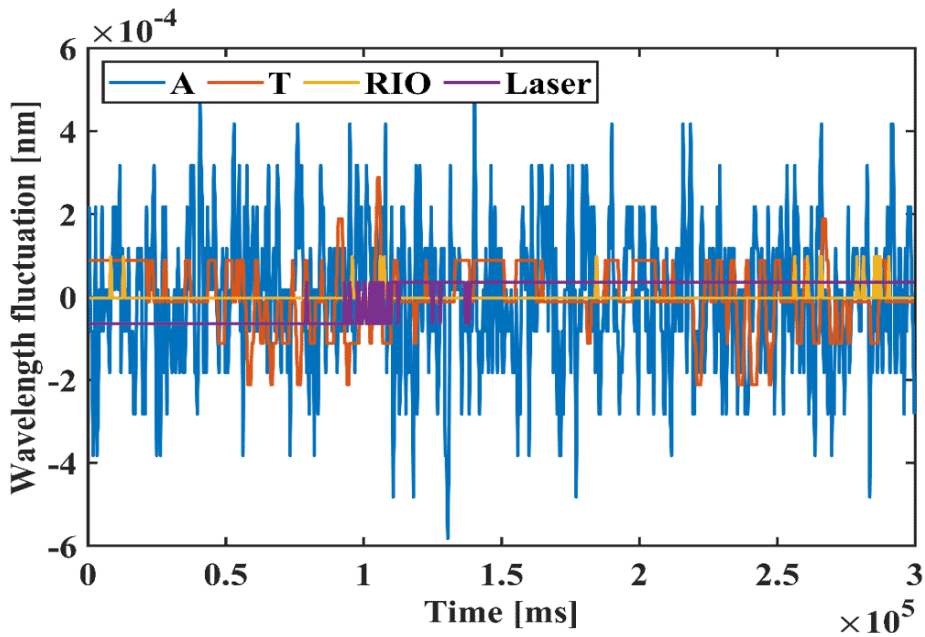


Narrow Linewidth Semiconductor Lasers



<10kHz Linewidth, 1550nm

DATASHEET

Typical Spectrum

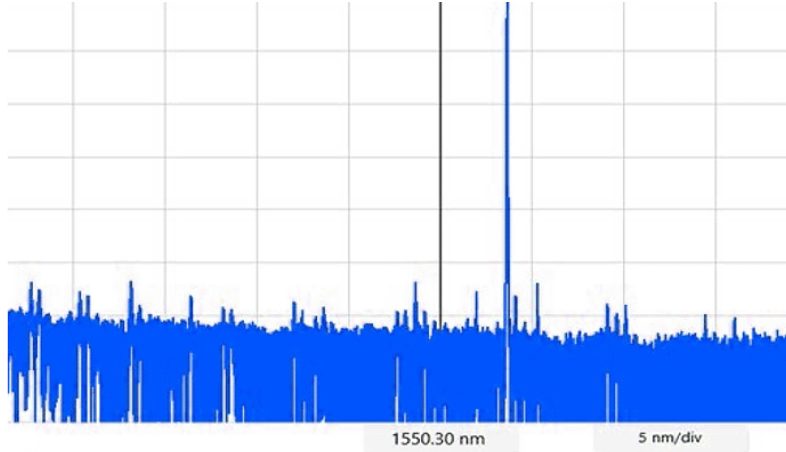

Ordering Information

Prefix	Wavelength	Output Power	Linewidth	Benchtop*	Type	Fiber Type	Fiber Buffer	Fiber Length	Connector
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NLLD-	1550nm = 5 Special = 0	10mW = 1 20mW = 2 30mW = 3 40mW = 4 120mw = C 150mw = E	5kHz = 5 3kHz = 3 2kHz = 2 1kHz = 1 6kHz = 6 8kHz = 8 9kHz = 9	No = 1 Yes = 2	Standard = 1 Special = 0	SM28 = 1 PM1550 = 4 Special = 0	900µm Tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 1.5 m = 5 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7

* Benchtop is a plug-play unit integrated with power supply with wavelength and power controls

Narrow Linewidth Semiconductor Lasers



<10kHz Linewidth, 1550nm

DATASHEET

Caution Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a laser diode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots



Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 μm .

Maximum power = 30 mW.



*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

*IEC is a registered trademark of the International Electrotechnical Commission.