up to 600mW, 0.2nm, integrated with monitor





DATASHEET

Return to the Webpage 🤉



Features

- High Output Power, up to 600mW Kink Free
- Single-Mode Fiber Pigtail
- Fiber Bragg Grating Stabilization
- 10 pin Mini- Butterfly Package
- Pin-out Compatibility With 14 pin BTF Package
- Internal Thermoelectric Heatpump and Monitor Photodiode
- Telcordia GR-468-CORE Compliant
- RoHS compliant

Applications

- Low Noise EDFAs
- Dense Wavelength Division Multiplexing (DWDM) EDFAs
- CATV Applications



These lasers are designed as pump sources for erbium doped fiber amplifier (EDFA) applications. Processes and techniques of coupling the fiber to the laser allow high output powers that are very stable with both time and temperature.

The series pump module utilizes a fiber Bragg grating design for enhanced wavelength and power stability performance. This product has been designed to ensure superior wavelength locking over drive current, temperature and optical feedback changes.

Devices are available with kink free output powers to 600mW.


Due to their high sensitivity to electrostatic discharge, warranty coverage applies only to fully metal covered modules the benchtops, which include proper protection. Other versions of the lasers and photodetectors are not covered by any warranty. Please use them with great caution.

Specifications

Parame	Min	Typical	Max	Unit			
Threshold current		50	70	mA			
Operating forward voltage		1.7	2.0	V			
Spectral width			0.2	1.0	nm		
Optical Output Power				600	mW		
Signal to noise ratio		20			dB		
Temperature dependence of pe	eak wavelength		0.008	0.01	nm/°C		
Monitor detector responsivity		1	5	10	μΑ/mW		
Monitor dark current				50	nA		
	>30mW			0.08			
Files a server stability.	20 – 30mW			0.08	dB		
Fiber power stability	10 – 20mW			0.10			
	5 – 10mW			0.15			
Return loss					dB		
Thermistor BETA value	3500		4100	К			
Thermistor resistance	Thermistor resistance			10.5	kΩ		
TEC Current			2	Α			
TEC Voltage	-2.5		+2.5	V			
Heat pump current			1.7	Α			
Heat pump voltage			2.6	V			
Heat pump power			4.4	W			
Total module power consumpt			6.6	W			
Operating case temperature	-20		75	°C			
Storage temperature	-40		85	°C			
Storage relative humidity	5		95	%			
Operating relative humidity	5		85	%			
Pigtail axial pull force			10.0	N			
Pigtail side pull force			5.0	N			
Fiber bend radius	13			mm			
Lead soldering temperature			350	°C			
Laser diode forward current	• ,			1100	mA		
Laser diode current transient			1200	mA			
Laser diode reverse current			10	μΑ			
Laser diode reverse voltage			2.0	V			
Heat pump current	-2.2		2.2	Α			
Heat pump voltage	-3.0		3.0	V			
Fiber type	Corning						
Cut-off wavelength	870	920	970	nm			
Mode field diameter @ 980nm	5.6	5.9	6.2	μm			
Cladding diameter	124.5	125	125.5	μm			
Fiber coating diameter	235	245	255	μm			

Notes:

Rev 11/25/25







^{*} Conditions unless otherwise stated: Case temperature -20 to 75°C, Monitor diode bias -5V, CW operation




up to 600mW, 0.2nm, integrated with monitor



DATASHEET


Mechanical Dimension (mm)

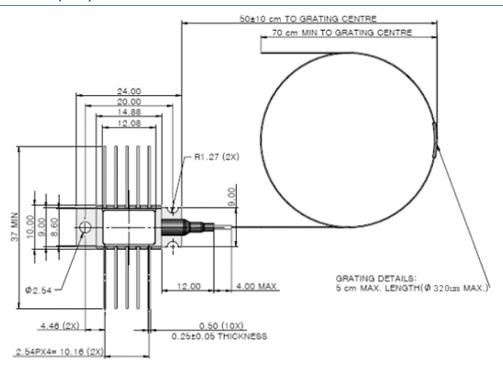



^{*}Product dimensions may change without notice. This is sometimes required for non-standard specifications.

PIN Assignment



PIN	Description	PIN	Description
1	TEC (+)	6	Laser Anode (+)
2	Thermistor	7	Laser Cathode (-)
3	Monitor Anode (-)	8	NC
4	Monitor Cathode (+)	9	Package Ground
5	Thermistor	10	TEC (-)





up to 600mW, 0.2nm, integrated with monitor

		1
	 •	
_		

DATASHEET

Typical Spectrum

Ordering Information

				2	1	2					
Prefix	Wavelength	Power	Grade	Isolator	Monitor	TEC Cooling	Package	Fiber Type	Fiber Cover	Fiber Length	Connector
PUFB-	980nm = 98	>400mW = 4 >600mW = 6	Standard = 1 Premium = 2	Non = 2	Yes = 1 No = 2	No = 1 Yes = 2	10-pin = T	Hi1060 = 2 PM980 = 9 Special = 0	0.9mm Tube = 3 Special = 0	0.5m = 2 0.25m = 1 1.0 m = 3 1.5 m = 5 Special = 0	FC/APC = 3 FC/PC = 2 Non = 1 SC/PC = 4 SC/APC = 5 LC/PC = 7 LC/UPC = U Special = 0



up to 600mW, 0.2nm, integrated with monitor



DATASHEET

Benchtop Matching Laser Diode Driver



Agiltron cost-effective LDCB series benchtop control kit is designed for easy laser diode mounting and precise control. It incorporates a high-precision, low-noise auto-feedback drive electronics to ensure constant output power or a constant driving current and an integrated temperature control unit maintains optimal operating conditions. The system provides up to 1A driving current and up to 2A TEC cooling current. Each system features a front fiber output connector. The user interface includes an intuitive LCD display for independent control of output power and temperature via two front rotating knobs. The LDCB also includes a universal power supply compatible with 100 to 240 VAC. The LDCB has a built-in isolator option to prevent reflection-induced laser emissions instability. The LDCB is designed as a laser diode and TEC controller kit for customer to install laser diode. It has three types of pluggable laser mounts of butterfly, DIL, and TOCAN. The TOCAN mount contains an external TEC that maintains a constant temperature for wavelength stability.

For details please click: https://agiltron.com/product/laser-diode-tec-controllers-benchtop-kit/

Turn-Key Module Matching The Laser Diode



The Agiltron LDCM series laser source module is designed for OEM applications and features all-in-one high reliability and highly stable laser output. The LDCM contains high-precision, low-noise, auto-feedback laser diode drive electronics to ensure constant output power or driving current and an integrated temperature controller that maintains optimal operating conditions. An optional fiber optical isolator can be integrated to prevent reflection-induced laser emission instability, which is essential for achieving highly stable lasers. Agiltron produces isolators from 370nm to 2600nm. The system provides up to 1A driving current and up to 2A TEC cooling current. Each unit features a single FC/APC connector output and two front rotating knobs for independent setting of laser output power and temperature. A toggle switch allows selection between constant current control mode and feedback constant output power mode.

For details please click: https://agiltron.com/product/laser-diode-tec-controllers-module/

Laser Driver Kit



Agiltron cost-effective LDCD series module control kit is designed for easy laser diode mounting and precise control. It incorporates a high-precision, low-noise auto-feedback drive electronics to ensure constant output power or a constant driving current and an integrated temperature control unit maintains optimal operating conditions. The system provides up to 1A driving current and up to 2A TEC cooling current. It has three types of pluggable laser mounts of butterfly, DIL, and TOCAN. The TOCAN mount contains an external TEC that maintains a constant temperature for wavelength stability. It comes with cables to connect between the mounting module to the driving module, making integration convenient.

For details please click: https://agiltron.com/product/laser-diode-tec-controllers-compact/







P +1 781-935-1200







up to 600mW, 0.2nm, integrated with monitor



DATASHEET

Caution Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a laser diode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots





Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = $1.3/1.5 \mu m$.

Maximum power = 30 mW.



*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



^{*}IEC is a registered trademark of the International Electrotechnical Commission.