

CrystaLatch™

1x1, 1x2 Series Fiber Optic Switch


(Full aerospace, OutSpace, and Undersea qualified)
(SM, PM, High Power, Bidirectional, Isolator/Circulate Build-in)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)

Product Description

The CL 1x1, 1x2, 2x1 Series Fiber Optical Switch redirects an incoming optical signal into a selected output fiber, achieved using patented non-mechanical configurations and activated via an electrical control signal. Latching operation preserves the selected optical path after the drive signal has been removed. The all solid state CL 1x1,1x2 fiber optic switch features low insertion loss, high extinction ratio, high channel isolation, and extremely high reliability and repeatability. It is designed to meet the most demanding switching requirements of continuous operation without failure, over 25-year longevity, operation under shock/vibration environment and large temperature variations, and fast response time.

The switch also has build-in circulator and isolator functions. Electronic driver is available for this series of switches.

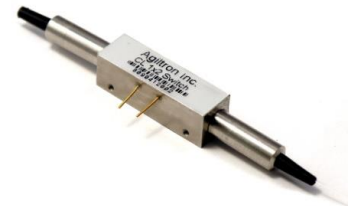

Performance Specifications

CL 1x1, 1x2 Series Switch	Min	Typical	Max	Unit	
Operation Wavelength ^[1]	1520	1550	1580	nm	
	1295	1310	1325		
Insertion Loss ^[2]		0.7	1.0 (1.2 ^[4])	dB	
Cross Talk ^[2]	Bidirectional Series		35	50	dB
	Unidirectional Series		40	50	dB
Return Loss ^[2]	50	55		dB	
PDL (SM Series)		0.1	0.2	dB	
Extinction Ratio (PM Series)	18	25		dB	
Switch Speed (rise, fall)	5	50	200	µs	
Repetition Rate		2K		Hz	
Polarization Mode Dispersion		0.1	0.2	ps	
Switch Type	Solid-Stage Latching				
Operating Temperature	-5		70	°C	
Storage Temperature	-40		85	°C	
Optical Power Handling ^[3]		300	500	mW	
			2	W	
Package Dimension	58.2L x 8.4W x 8.4H			mm	
Durability	10 ¹⁴			Cycles	

[1]. Agiltron can achieve same SPEC at L band.

[2]. Measured without connectors.

[3]. Special operating temperature -40 to +85 °C is available with Ordering Information.

[4]. For special operating temperature, lower than -20 °C and higher than +70 °C.

Features

- Solid-State high speed
- Ultra-high reliability
- Fail-safe latching
- Low insertion loss
- Direct low voltage drive
- Compact
- Low cost

Applications

- Optical channel blocking
- Configurable Add/Drop
- System monitoring
- Instrumentation




Revised on 8/23/21

CrystaLatch™

1x1, 1x2 Series Fiber Optic Switch (Full aerospace, OutSpace, and Undersea qualified) (SM, PM, High Power, Bidirectional, Isolator/Circulate Build-in)

Mechanical Dimensions (Unit: mm)

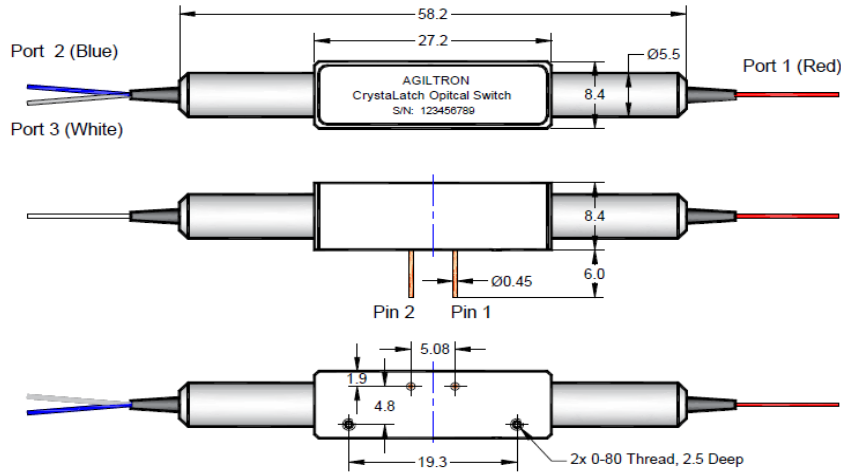

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Driving Information

The switch is actuated by applying a voltage pulse. Applying one polarity pulse, one light path will be connected and latched to the position. Applying a reversed polarity pulse, another light path will be connected and latched to the position after pulse removed.

Parameter	Minimum	Typical	Maximum	Unit
Drive Voltage	4.5	5	5.5	V
Resistance (each Pin Group)	15	18	22	Ω
Pulse Duration	0.2	0.3	0.5	ms

Driving kit with USB and TTL interfaces and Windows™ GUI is available. We also offer RS232 interface as an option – please contact Agiltron sales.

Bidirectional Series 1x1, 1x2 or 2x1 Switch Driving Table

Optical Path		Pin 1	Pin 2
1x1	1x2 or 2x1		
Port 1 ↔ Port 2	Port 1 ↔ Port 2	-	+
Dark	Port 1 ↔ Port 3	+	-

"+" is 4.5 ~ 5.5 V pulse, typical pulse is 5 V. "-" is ground.

Unidirectional Series 1x1, 1x2 Switch Driving Table

Optical Path		Pin 1	Pin 2
1x1	1x2		
Port 1 → Port 2	Port 1 → Port 2	-	+
Dark	Port 1 → Port 3	+	-

"+" is 4.5 ~ 5.5 V pulse, typical pulse is 5 V. "-" is ground.

Unidirectional Series 1x1, 2x1 Switch Driving Table

Optical Path		Pin 1	Pin 2
1x1	2x1		
Port 2 → Port 1	Port 2 → Port 1	+	-
Dark	Port 3 → Port 1	-	+


"+" is 4.5 ~ 5.5 V pulse, typical pulse is 5 V. "-" is ground.

1x1, 1x2 Series Fiber Optic Switch

(Full aerospace, OutSpace, and Undersea qualified)

(SM, PM, High Power, Bidirectional, Isolator/Circulate Build-in)

Function Diagram

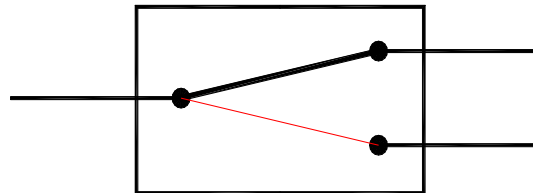

CL 1x2 Series Switch

Ordering Information

<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>								
	Type	Wavelength	Switch	Package	Fiber Type	Fiber Length	Connector [9]	
CLSW [1]	1x1=11	1310=3	Dual Stage=2	Standard=3	SMF-28=1	Bare fiber=1	None=1	
CLPM [2]	1x2=12	1550=5	Special=0	-40~+85°C=A	PM 250=B	900um loose tube=3	FC/PC=2	
CLHP [3]	2x1=21	Special=0		-40~+70°C=B	Special=0	Special=0	FC/APC= 3	
CLBD [4]				-20~+85°C=C			SC/PC= 4	
CLPH [5]	Special=00			-20~+70°C=D			SC/APC=5	
CLHB [6]				Special=0			ST/PC=6	
CLPB [7]							LC/PC=7	
CPHB [8]							Duplex LC=8	
							Special=0	

- [1]. **CLSW**: CL 1x1, 1x2 SM **SWITCH**.
- [2]. **CLPM**: CL 1x1, 1x2 **PM** Switch.
- [3]. **CLHP**: CL 1x1, 1x2 SM **High Power** Switch.
- [4]. **CLBD**: CL 1x1, 1x2 SM **BIDIRECTIONAL** Switch.
- [5]. **CLPH**: CL 1x1, 1x2 **PM High Power** Switch.
- [6]. **CLHB**: CL 1x1, 1x2 **High Power Bidirectional** Switch.
- [7]. **CLPB**: CL 1x1, 1x2 **PM Bidirectional** Switch.
- [8]. **CPHB**: CL 1x1, 1x2 **PM High Power Bidirectional** Switch.
- [9]. There isn't any connector in high power switches. Please contact us for high power connectors.

