

Compact 1064nm High Power Optical Isolator

2W, SM, PM



The OIBH series of compact 1064 nm high-power in-line optical isolators offers a small form factor and supports power handling up to 2 W. These isolators use bismuth garnet, which exhibits some absorption in the 1060 nm band and therefore can heat up by approximately 50 °C under 2 W operation in ambient conditions. Standard connectors are not suitable for high-power applications; splicing or using Agiltron high-power connectors is recommended.

Features

- Low Insertion Loss & PDL
- High Isolation Extinction Ratio
- High Stability and Reliability

Applications

- Fiber Laser
- High Power EDFA
- Fiber Optical Instrument

Specifications

Parameter	Min	Typical	Max	Unit
Center Wavelength		1064		nm
Bandwidth		± 5		nm
Peak Isolation		35		dB
Isolation (at 23°C)		≥ 28		dB
Insertion Loss (at 23°C)		≤ 2.5 (Input Power 1W CW) ≤ 3.0 (Input Power 2W CW)		dB
PDL (Non-PM Fiber Isolator)		≤ 20		dB
Polarization Extinction Ratio (PM Fiber Isolator)		≥ 20		dB
Return loss (Input/Output)		≥ 45/45		dB
Power Handling	CW	2		W
	Pulse Peak	10		kW
Fiber Type	Non-PM Fiber Isolator	HI1060		
	PM Fiber Isolator	PM 980		
Operating Temperature	+10		+50	°C
Storage Temperature	0		+60	°C

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 07/17/25


Compact 1064nm High Power Optical Isolator

2W, SM, PM



DATASHEET

Mechanical Dimensions (mm)

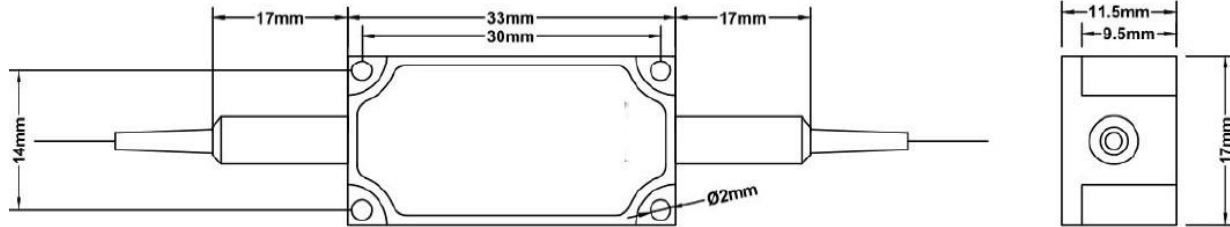

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number) System

Prefix	Type	Wavelength	Grade	Package	Forward Power	Backward Power	Fiber Type	Fiber Cover	Connector ^[1]
OIBH-	PI* = 1 PD** = 2	1064nm = 6 1084nm = 8 1074nm = 7 Special = 0	Regular = 1 Special = 0	Regular = 1 Special = 0	1W = 1 2W = 2 Special = 0	0.2W = S Special = 0	Hi1060 = 6 PM980 = 9	Bare Fiber = 1 0.9mm tube = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 High FC/PC = H Special = 0

* Polarization Independent

** Polarization Dependent

NOTE: Red color for special order

[1]. The connector cannot be installed directly onto bare fiber, as it is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer can remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SM28 fiber and decreases further with smaller core fibers.

Compact 1064nm High Power Optical Isolator

2W, SM, PM



DATASHEET

Isolation & IL Spectrum

