

Fiber Optic Retroreflector



DATASHEET

BUY NOW



Agiltron Fiber Optic Retroreflector is designed to reflect light input backward through the fiber. Our retroreflectors are available with single mode (SM), polarization-maintaining (PM), or multimode (MM) fiber. A specially made mirror is used in our device that achieves high reflection up to 99% and high optical power handling up to 5W.

Applications

- Fiber Interferometer
- Fiberoptic Sensor
- Fiber Instruments

Features

- Low Insertion Loss
- High Power
- High Reliability
- Low Cost
- Environmental Stability

Specifications

Parameter	Min	Typical	Max	Unit
Central Wavelength (λ_c)	630		2200	nm
Typical Spectral Width ($\Delta\lambda$)	± 30		± 50	nm
Typical Insertion Loss (λ_c , 23°C, no connector)	0.35		2	dB
Polarization Extinction Ratio (PM Fiber)	18		30	
Reflection Percentage	96		99	%
PDL (λ_c , 23°C)	≤ 0.10			dB
Operating Temperature	-5		+70	°C
Storage Temperature	-40		+85	°C
Optical Power Handling	0.2		5	W
Package Dimensions		$\varnothing 5.5 \times L35$		mm

Rev 11/29/23

© Photonwares Corporation

+1 781-935-1200

sales@photonwares.com

www.agiltron.com


Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Fiber Optic Retroreflector



DATASHEET

Dimensions (mm)

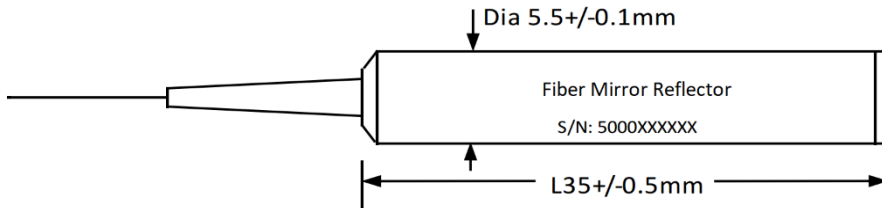

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information

Prefix	Type	Wavelength	Reflection	Package	Fiber Type	Fiber Cover	Fiber Length	Connector
FOMR-	Regular = R High Power = H	1064nm = 1 1310nm = 3 1550nm = 5 780nm = 7 980nm = 9 650nm = 6 Special = 0	100% = 11 10% = 10 20% = 20 Special = 00	ø5.5x35 = 2 ø3.5x15 = 1 Special = 0	SMF-28 = 1 HI1060 = 2 PM1550 = A SM600 = 6 SM780 = 7 SM980 = 9 PM980 = B Special = 0	900µm Tube = 3 Bare Fiber = 1 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/UPC = U Special = 0