


High Power Variable Fiber Attenuator USB/RS232



(up to 100W high power, all fiber types, high precision 0.2dB repeatability)

DATASHEET

BUY NOW

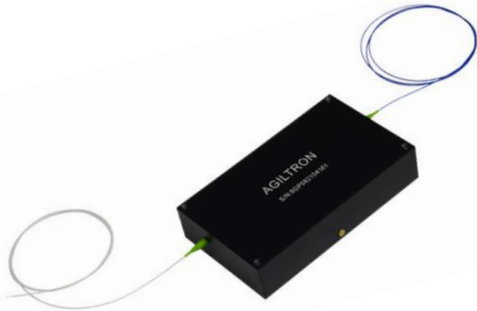

Features

- Lossless
- Broadband
- High Power
- All Fiber Types
- Up To 20W

Applications

- Instrument
- Laboratory
- High Power Fiber
- Lasers

This All-Fiber Variable Lossless VOA offers near-lossless transmission in the open/transparent state and electrical control attenuation of up to 10dB with an optical power of up to 10W. Attenuation is generated by applying bending stresses to the fiber with a precision motor. The unique design is capable of maintaining high polarization extinction ratio under stress. The HPVO series of VOAs beneficially features high optical power handling, near-lossless in the open/transplant state, and ultra-broadband that preserves the fiber's intrinsic transmission characteristics. The design is compatible with all types of fibers.

The heat is transfer to the metal base that requires mounting onto a heat sink.

Specifications

Parameter	Min	Typical	Max	Unit
Wavelength	300		5000	nm
Insertion Loss ^[1]	0.00	0.01	0.1	dB
Attenuation Resolution		Continuous		dB
Attenuation Range ^[2]	0		12	dB
Polarization Dependent Loss		0.02	0.1	dB
Stability ^[3]			1	dB
Return Loss	60			dB
Power Handling			10	W
Operating Temperature	-10		70	°C
Storage Temperature	-40		85	°C

Notes:

[1]. Excluding connectors. Each connector add 0.3dB loss and 2dB ER reduction for PM fiber

[2]. SM 9/125 fiber. Other type fiber may differ

[3]. Measured at 10dB attenuation, low attenuation is more stable

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [\[click this link\]](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 09/24/24

High Power Variable Fiber Attenuator USB/RS232

(up to 100W high power, all fiber types, high precision 0.2dB repeatability)



DATASHEET

Mechanical Dimensions (mm)

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

High Power Variable Fiber Attenuator USB/RS232



(up to 100W high power, all fiber types, high precision 0.2dB repeatability)

DATASHEET

Ordering Information

Prefix	Configuration	Type	Test Wavelength ^[1]	Fiber Type	Fiber Cover	Fiber Length	Connector ^[2]
HPVO-		Normally Open = 1	450 = 4 532 = 5 630 = 6 780 = 7 850 = 8 980 = 9 1060 = 1 1310 = 3 1550 = C 2000 = 2 Special = 0	Select from the table below	900um tube = 3 3mm tube = 4 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/UPC = 7 Special=0

[1]. The device is ultra-broadband, limited by the fiber transmission.

[2]. High power connector need order specially about \$420 each

Fiber Type Selection Table:

01	SMF-28	34	PM1550	71	MM 50/125µm
02	SMF-28e	35	PM1950	72	MM 62.5µm
03	Corning XB	36	PM1310	73	105/125µm
04	SM450	37	PM400	74	FG105LCA
05	SM1950	38	PM480	75	FG50LGA
06	SM600	39	PM630	76	STP 50/125
07	Hi780	40	PM850	77	IRZS23
08	SM800	41	PM980	78	IRZS32
09	SM980	42	PM780	E	105/NA.22
10	Hi1060	43		F	200/NA.22
11	SM400	44	PM405	G	300/NA.22
12		45	PM460	H	400/NA.22
13		K	800/NA.22	J	600/NA.22

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 µm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.