

Broadband Low Noise RF Amplifier (LNA)

50kHz-18GHz, 35 dB gain



DATASHEET

[Return to the Webpage](#)



Features

- Frequency: 50kHz-20GHz
- Small signal gain: 15dB
- NF=3dB
- Vout=4.48Vpp

Applications

- 5G Communication
- Test Equipment
- Optical Modulator Driver
- Radar System

This LNAM broadband Low Noise RF Amplifier provides output power up to 17 dBm with a gain of 35 dB across a frequency range of 50 kHz to 18 GHz. It features a noise figure (NF) of 3 dB within the 0.1-20GHz range. The amplifier operates on +12V DC at 120 mA and is equipped with a SMA Female connector.

Specifications

Parameter	Min	Typical	Max	Unit
Frequency Range	0.00005	18	20	GHz
Gain		30	35	dB
NF (0.1-20GHz)		3	5	dB
Input Power		-10	0	dBm
P1dB		+17		dBm
Psat		+16		dBm
Output Vpp		4.48		Vpp
Drain Supply	+8	+12	+15	V
Current		80		mA
Input Return Loss		-10		dB
Output Return Loss		-10		dB
Spec Temp		25		°C
Drain Supply		+16		V
RF Input Power		+20		dBm
Input Vpp		3.56		Vpp
Operating Temperature(note)	-20		70	°C
Storage Temperature	-65		+150	°C
Input Port		SMA Female		
Output Port		SMA Female		
Case Material		Copper		
Finish		Gold Plated		
Weight (Without Heatsink)		50		g
Size		30 x 30 x 9.5		mm

Note: -40 to +85°C is available according to request.

Caution

Please pay attention to the case temperature. If case temperature exceed higher than +50°C, heat sink and fan are required, or the amplifier may be damaged.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 12/29/25

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Broadband Low Noise RF Amplifier (LNA)


50kHz-18GHz, 35 dB gain




DATASHEET

Test Data (25°C)

S21 50MHz-20GHz

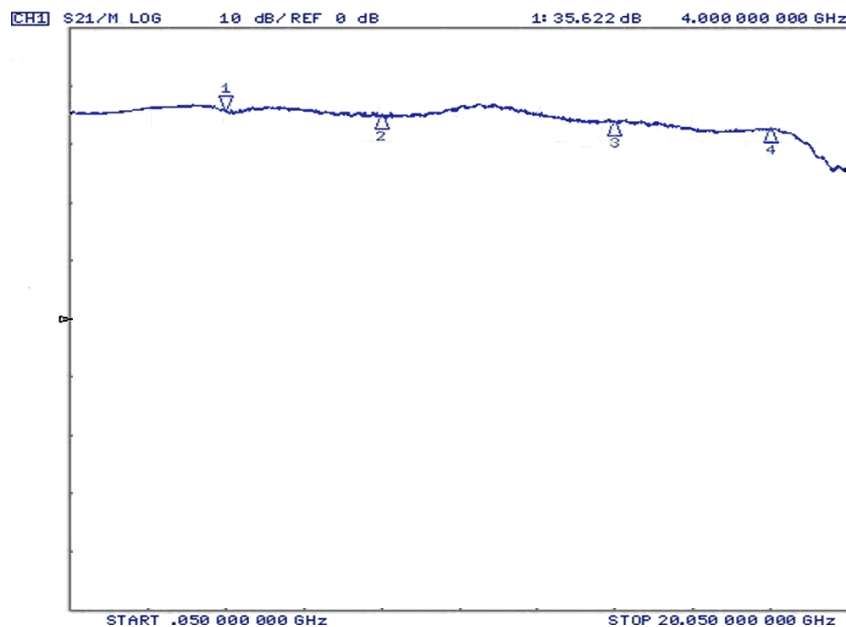

Psat vs Frequency

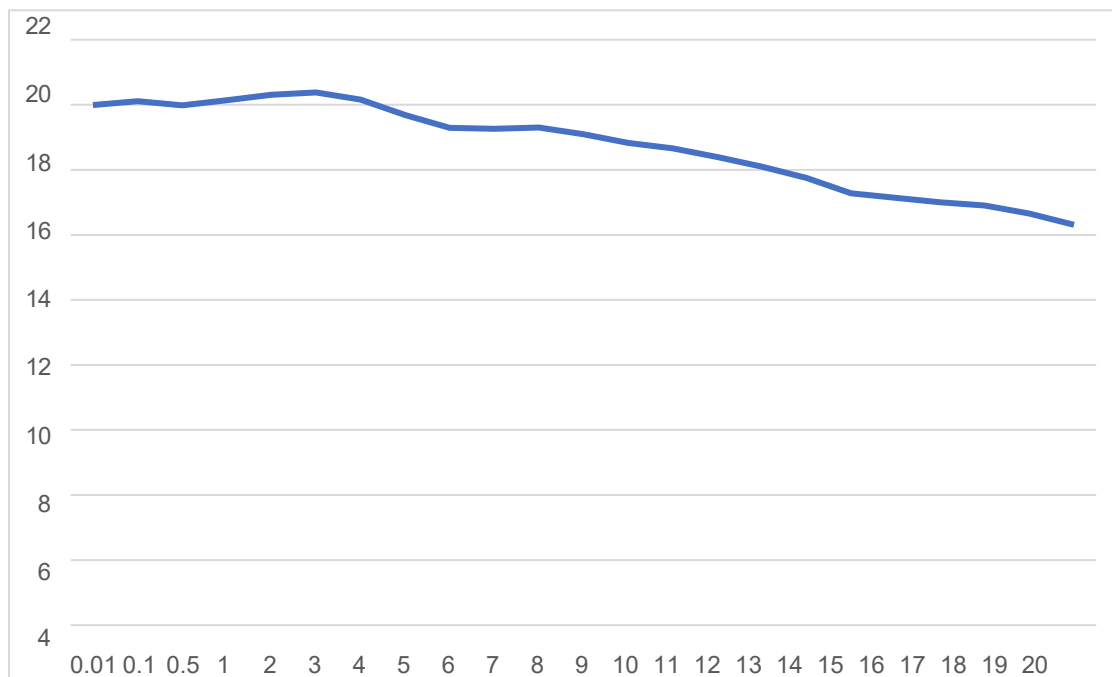


Broadband Low Noise RF Amplifier (LNA)

50kHz-18GHz, 35 dB gain




DATASHEET

Dimensions (mm)

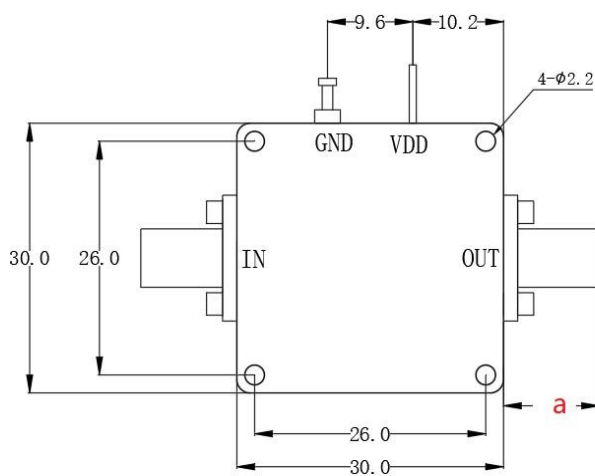

In millimetres

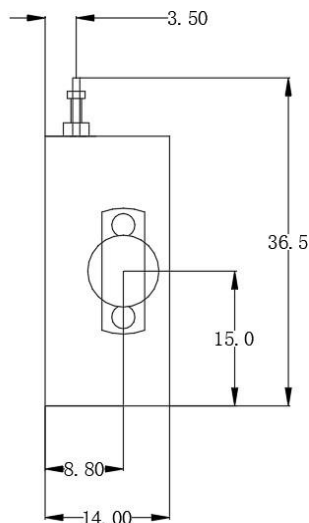

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

Ordering Information *

	0005	18	30	3	17	<input type="checkbox"/>
Prefix	Low Frequency	High Frequency	Gain	NF	P1dB	Module*
LNAM-	0.05MHz = 0005	18GHz = 18	30dB = 30	3dB = 3	17dBm = 17	No = 0 Yes = 1