

# MEMS 8 x 8 Fiber Optical Switch

(Non-Blocking, Bidirectional, Passive, 70dB on/off, 850nm, 1260-1620nm)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)

The MEMS FIBER Optical switches establish optical signal paths passively in milliseconds supporting all data rates, ideally suited to manage and monitor large optical networks intelligently and remotely. It has a unique dual 4x4 function. The MEMS switches are reliable with longevity suited for continuous operation. The control is net-based GUI that is compatible with standard network management protocols. It is housed in a 1U box.

The order table includes a list of standard control interfaces. Additionally, we provide a list of commands to assist customer engineers in coding. For those who require it, we offer a code-writing service for customer interfaces at an additional charge.

To minimize the delay between issuing a switching command and the actuation of switches caused by a standard window-based computer, it's essential to use a dedicated computer with a real-time operating system, such as a single-board computer running real-time Linux.



5-year manufacturer warranty

## Features

- Low Cost
- High Reliability
- Low Insertion Loss
- Broad Band
- Compact Design
- Low Voltage

## Specifications <sup>[1]</sup>

Parameters	Min	Typical	Max	Unit
Operation Wavelength	750	1270~1630	2400	nm
Insertion Loss <sup>[1]</sup> (SM)		1.5	2.2	dB
Insertion Loss <sup>[1]</sup> (MM)		1.8	2.8	dB
Crosstalk, On/Off Ratio	45		70	dB
Extinction Ratio (PM Fiber)	18		23	dB
Switch Speed (Rise, Fall) <sup>[2]</sup>		5	20	ms
Durability	10 <sup>9</sup>			cycle
Polarization Dependent Loss		0.04	0.2	dB
Wavelength Dependence Loss <sup>[3]</sup>		0.1	0.3	dB
Return Loss	50 <sup>[7]</sup>			dB
Repeatability		0.05	0.1	dB
Operating Temperature <sup>[4]</sup>	-5		65	°C
Transit Time Delay			0.2	Ms
Port to Port Time Delay Difference			0.5	Ns
Optical Power Handling (CW) <sup>[5]</sup>		300	500	mW
Storage Temperature	-40		85	°C
Electrical Power Consumption			50 <sup>[6]</sup>	W
Package Dimension	1RU/2RU/4RU			

### Notes:

- [1]. Measured at 1550nm without connectors, each connector adds 0.2-0.3dB. Shorter or longer wavelength loss increases.  
Minimum loss version is available as special order
- [2]. This is intrinsic switch component performance. The remote control adds delay (Ethernet is the longest)
- [3]. Within 50nm bandwidth
- [4]. -25°C~75°C version is also available.
- [5]. High power version available
- [6]. For the non-latching version
- [7]. For SM fiber, MM fiber is 35dB

**Note:** The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

## Applications


- Optical Signal Routing
- Network Protection
- Wavelength Management
- Signal Monitoring
- Instrumentation

# MEMS 8 x 8 Fiber Optical Switch

(Non-Blocking, Bidirectional, Passive, 70dB on/off, 850nm, 1260-1620nm)


## Optical Path Illustration

MEMS 4x4 Switch

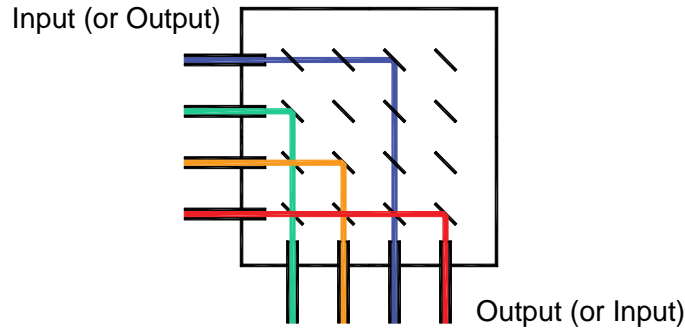

## 10<sup>9</sup> Switching Cycle Test (This was performed on 1x2 component, not the switch system)

We have tested MEMS 1x2 switch at the resonant frequency ~300Hz for more than 40 days, as shown in the attachment, which corresponds over 10<sup>9</sup> switching cycles. The measurements show little changes in Insertion loss, Cross Talk, Return loss, etc, all parameters are within our specs.

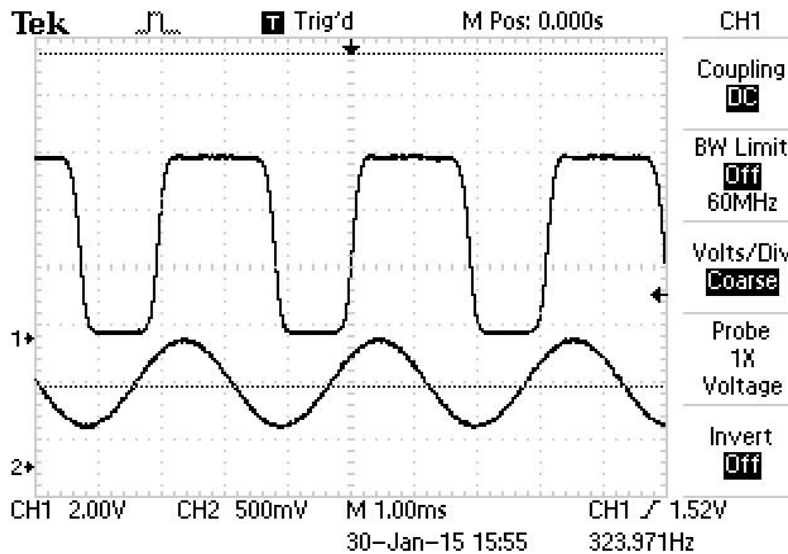

## Control & Electric Interface

The switch default control is Ethernet with a GUI.


- Physical Layer: 10/100Base-T
- Data Link Layer: Ethernet Protocol per IEEE 802.3
- Network Layer: IPv4
- Transport Layer: UDP
- Application Protocol: SNMP
- Connector Type: RJ-45
- Dual 48V / 110-220V Power Input

We provide a command list for customers to write their control code, such as Python

# MEMS 8 x 8 Fiber Optical Switch

(Non-Blocking, Bidirectional, Passive, 70dB on/off, 850nm, 1260-1620nm)

## Typical Insertion Loss vs Wavelength (1240-1630nm)

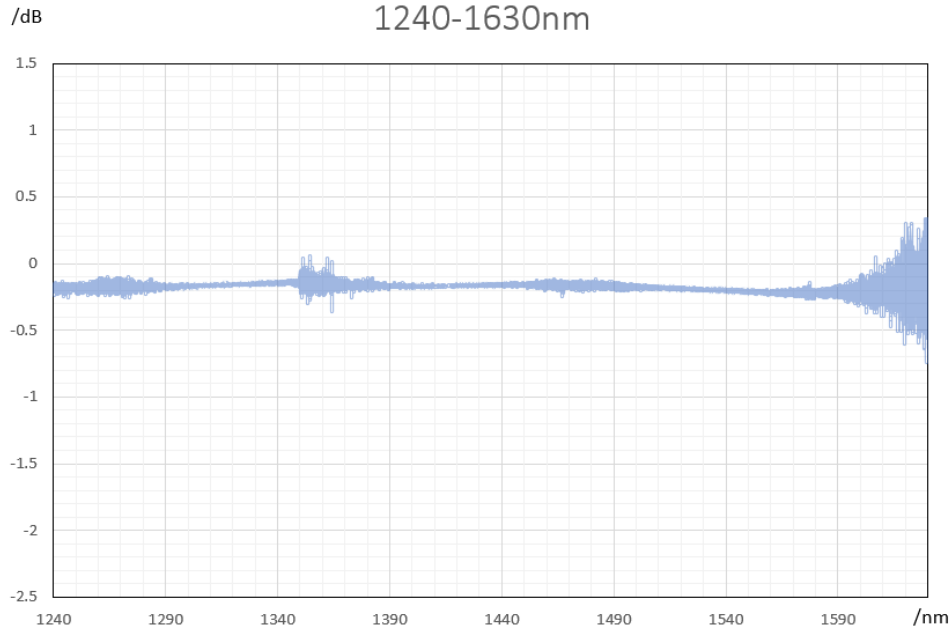

## Ordering Information

Prefix	Type	Wavelength <sup>[1]</sup>	Control Interface	Package	Fiber Type	Power Supply	Connector	On/Off	ER	Monitor
<b>MEMS-</b>	8x8 = 008 Dual 8x8 = 208 Special = 000	1240-1640nm = 1 1060 = 6 1310 = 3 1410 = 4 1550 = 5 1310/1550 = 2 850 = 8 1060 = 6 Special = 0	Ethernet = 2 RS232 = 3 Special = 0	1RU = 1 1.5U = 5 2RU = 2 4RU = 4 Special = 0	SMF-28 = 1 MM 50/125 = 2 Hi1060 = 3 Panda <sup>[2]</sup> = 5 62.5/125 = 6 Hi780 = 8 PM980 = 9 SM800 = A PM850 = B PM780 = C Special = 0	110-220V = 4 48V = 5	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 LC/PC = 7 Duplex LC/PC = 8 LC/APC = A LC/UPC = U Special = 0	Regular = 1 SM70dB = 2 MM50dB = 3	Non = N >18 = 1 23 = 2 29 = 3	Non = 1 Output = 2 Input Output = 3 Input = 4


[1]. Measured wavelength. The device has a wider wavelength coverage. Customer can request to measure at several wavelengths.

[2]. For PM fiber version, please call us to get more information.

# MEMS 8 x 8 Fiber Optical Switch

(Non-Blocking, Bidirectional, Passive, 70dB on/off, 850nm, 1260-1620nm)

## Example of RS232 Control GUI (one can create a running receipt, pause, repeat loop)

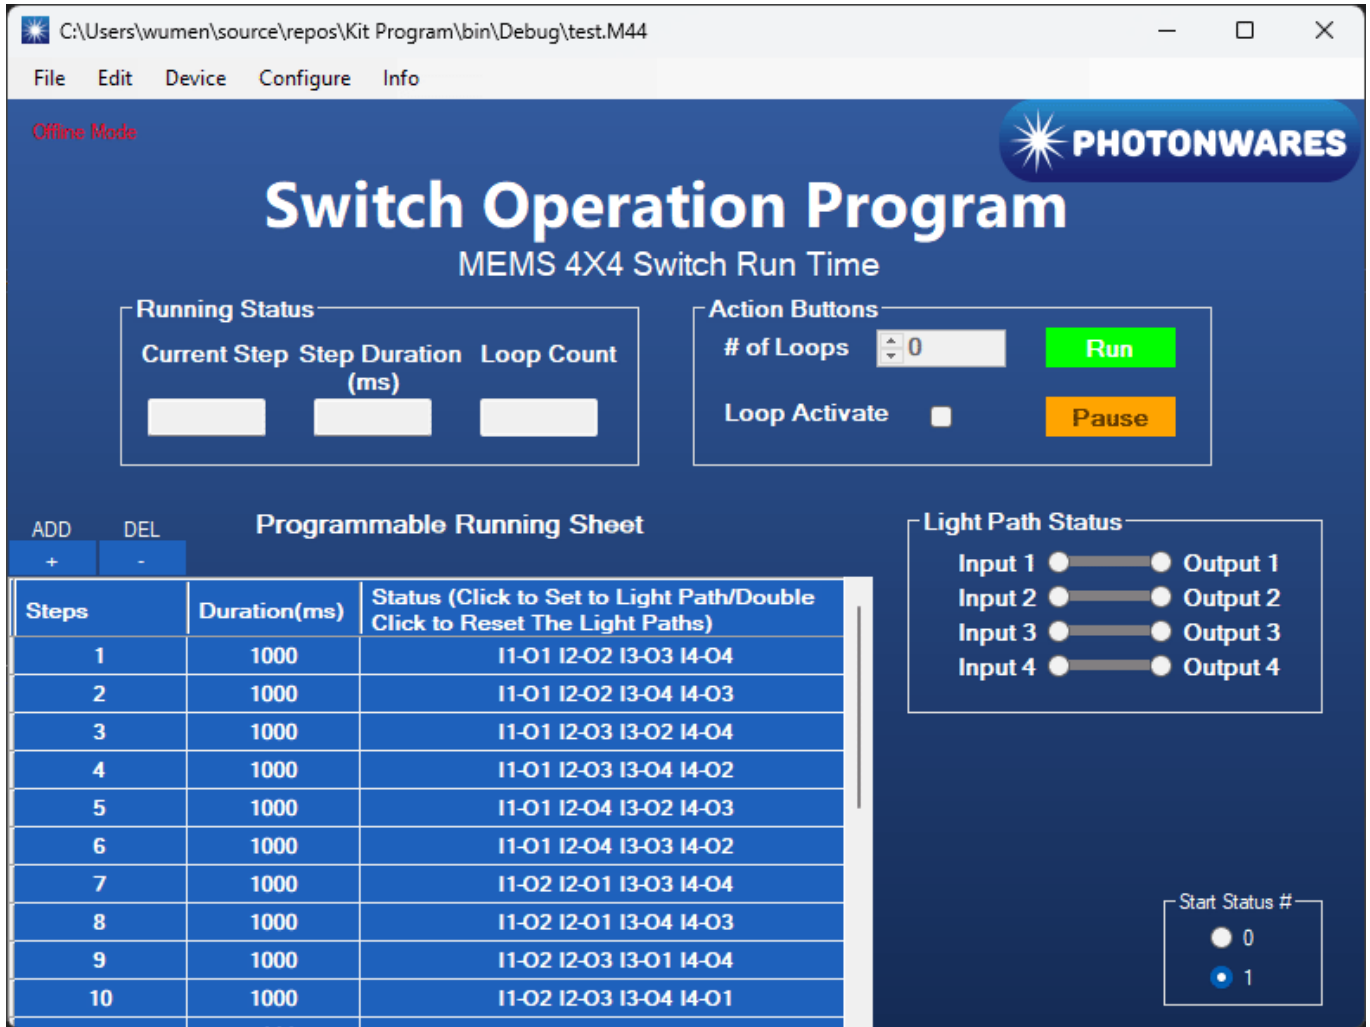

The screenshot shows a software window titled "Switch Operation Program" for a MEMS 4X4 Switch. It features a menu bar (File, Edit, Device, Configure, Info), a status bar (Offline Mode), and the PhotonWares logo. The main interface includes:


- Running Status:** A table with columns for Current Step, Step Duration (ms), and Loop Count, each with an empty input field.
- Action Buttons:** A "# of Loops" spinner set to 0, a green "Run" button, a "Loop Activate" checkbox, and an orange "Pause" button.
- Programmable Running Sheet:** A table with columns for Steps, Duration (ms), and Status. It includes "ADD" (+) and "DEL" (-) buttons above the table.
- Light Path Status:** A control panel with four rows of sliders, each labeled "Input X" and "Output X" (e.g., Input 1, Output 1).
- Start Status #:** A small control with radio buttons for status 0 and 1, where status 1 is currently selected.

Steps	Duration(ms)	Status (Click to Set to Light Path/Double Click to Reset The Light Paths)
1	1000	I1-O1 I2-O2 I3-O3 I4-O4
2	1000	I1-O1 I2-O2 I3-O4 I4-O3
3	1000	I1-O1 I2-O3 I3-O2 I4-O4
4	1000	I1-O1 I2-O3 I3-O4 I4-O2
5	1000	I1-O1 I2-O4 I3-O2 I4-O3
6	1000	I1-O1 I2-O4 I3-O3 I4-O2
7	1000	I1-O2 I2-O1 I3-O3 I4-O4
8	1000	I1-O2 I2-O1 I3-O4 I4-O3
9	1000	I1-O2 I2-O3 I3-O1 I4-O4
10	1000	I1-O2 I2-O3 I3-O4 I4-O1

# MEMS 8 x 8 Fiber Optical Switch

(Non-Blocking, Bidirectional, Passive, 70dB on/off, 850nm, 1260-1620nm)

## Example of Ethernet Remote Control GUI

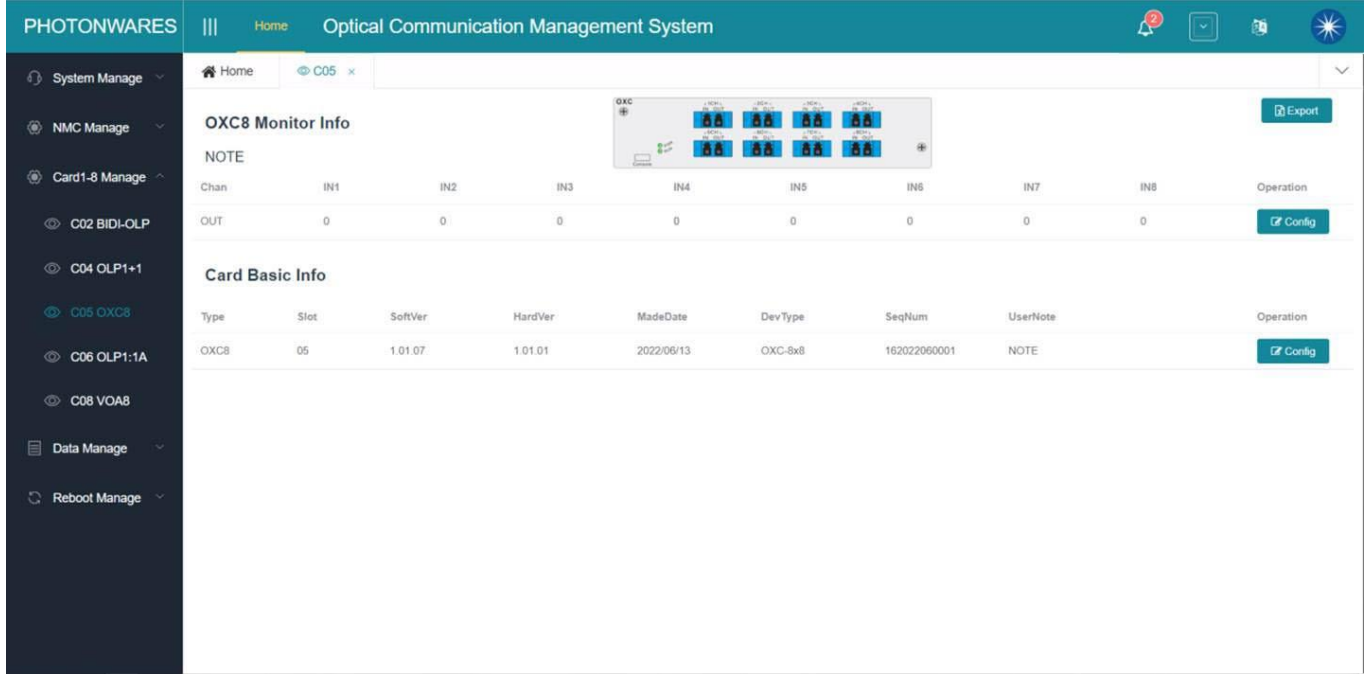

The screenshot displays the Photonwares Optical Communication Management System interface. The left sidebar contains navigation options: System Manage, NMC Manage, Card1-8 Manage, C02 BIDI-OLP, C04 OLP1+1, C05 OXC8 (selected), C06 OLP1:1A, C08 VOA8, Data Manage, and Reboot Manage. The main content area shows the OXC8 Monitor Info section with a NOTE and a table of channel data. Below this is the Card Basic Info section with a table of card details.

Chan	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	Operation
OUT	0	0	0	0	0	0	0	0	Config

Type	Slot	SoftVer	HardVer	MadeDate	DevType	SeqNum	UserNote	Operation
OXC8	05	1.01.07	1.01.01	2022/06/13	OXC-8x8	162022060001	NOTE	Config



# MEMS 8 x 8 Fiber Optical Switch

(Non-Blocking, Bidirectional, Passive, 70dB on/off, 850nm, 1260-1620nm)

---

## Questions and Answers

**Q:** If the device were to fail, would the switch continue to pass the fiber light through the switch as configured before failure?

**A:** This depends, if one mirror fails, it only affects the light going through that mirror.

**Q:** When power is restored, does the IN/OUT configuration before failure remain in place?

**A:** Yes, when power back up it will go to the previous flightpath

**Q:** If the power to the device were shut off, would the device continue to pass the fiber light as configured before failure?

**A:** This function is called latching. We uniquely offer MEMS latching switches but cost more.

**Q:** With the Ethernet Control Option, does the switch support SNMPv3

**A:** Yes. This internet standard protocol allows user to write their own control code

**Q:** With the Ethernet Control Option, what type of encryption does the SNMPv3 use?

**A:** MD5/DES

**Q:** With the Ethernet Control Option, could this device be controlled by multiple users at different locations and all users will also see the configuration updates?

**A:** Yes

**Q:** With the Ethernet Control Option, does the user need to install any software on their computer other than a web browser?

**A:** No