

Polarization Controller – Piezoelectric

DATASHEET

BUY NOW 



The Piezoelectric Polarization Controller (PIPC) utilizes three or four piezoelectric fiber squeezing plates arranged at a 45-degree angle apart to control fiber birefringence phase retardation. It features ultra-low insertion loss, all fiber type accommodation, high power handling, and a large phase change capability. We further offer driver with a convenient 0-5V control inputs. The device is designed for customers to incorporate sensors and auto-control firmware, enabling endless polarization control while maintaining a constant output polarization without the need for resetting. The polarization controller is engineered to meet the operational requirements of fast response and continuous operation, providing an ultimate solution for precise polarization selection.

Features

- Large Phase Change
- High Reliability
- Low Insertion Loss
- Compact Size
- High Optical Power Handling

Applications

- Polarisation Scrambler
- Polarisation Management
- Polarisation Mode dispersion compensation
- Instrumentation

Specifications

Parameter	Min	Typical	Max	Unit
Wavelength	400		2650	nm
Insertion Loss ^[1]	0.1	0.5	0.8	dB
Polarization Mode Dispersion			0.05	ps
Return Loss	65			dB
Response Time Rise/Fall	30			μs
Operating Optical Power		0.5	1	W
Operation Frequency	DC		100	kHz
Polarization Rotation ^[2]	0		4	π
Control Voltage ^[2]	0	35	40	V
Operating Temperature		-30 ~ 60		°C
Storage Temperature		-40 ~ 85		°C

Notes:

[1]. Excluding connectors. Connectors add 0.3dB.

[2]. @1550nm

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.


Rev 09/06/24

Polarization Controller – Piezoelectric


DATASHEET

Mechanical Dimensions (mm)

3 Plates

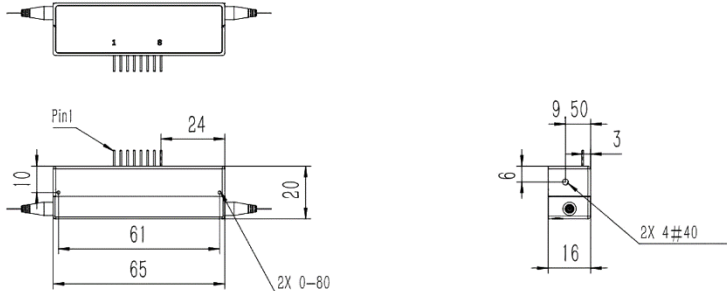


4 Plates

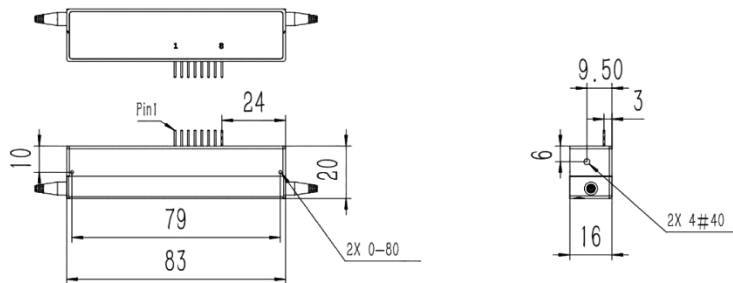

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Driver Pin Definition (4 plates A, B, C, D)

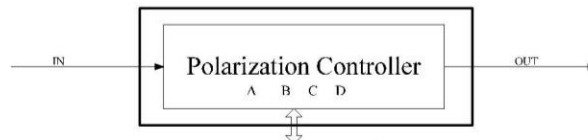

Pin #	Plate/Connection	Pin #	Plate/Connection
1	A-	5	B+
2	B-	6	C+
3	C-	7	D+ (NC For 3 Plates)
4	A+	8	D- (NC For 3 Plates)

Ordering Information

Prefix	Type	Wavelength	# Plates	Driver	Fiber Type	Fiber Cover	Fiber Length	Connector
PIPC-		2000 nm = 2 1550 nm = 5 1310nm = 3 1060nm = 1 980nm = 9 850nm = 8 Special = 0	3 = 3 4 = 4	Non = 1 Yes = 2 Special = 0	SMF-28 = 1 Hi1060 = 2 SM980 = 9 SM850 = 8 780HP = 3 Special = 0	Bare fiber = 1 0.9mm loose tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 LC/PC = L Special = 0

Polarization Controller – Piezoelectric



DATASHEET

Driver PCB

The driver contains four independent amplifiers that convert an input signal of 0-5V to 0-40V with a frequency bandwidth of DC-500KHz. A wall pluggable 12V DC power supply is included. The analog inputs are through SMA connectors. A metal electrostatic protection enclosure is an option for laboratory use to prevent electrostatic damage from hand touching.

