

BUY NOW 


LightBend™ Dual 2x2 Bypass Single-Mode Fiber Optic Switch (Bidirectional)

(Protected by U.S. patent 6823102 and pending patents)

Product Description

The LB Dual 2x2 Bypass Fiber Optic switch is an integrated single device with 8 fiber ports. Based on Agiltron's patented technologies, the switch is designed especially for protection and restoration applications. The switch is activated by a low voltage pulse between two states, and the latching operation preserves the selected optical path after the drive signal has been removed. The switch has integrated electrical contact based status sensors. The design significantly reduces moving part position sensitivity, offering unprecedented high stability as well as an unmatched low cost. Electronic driver and circuit design assistance are available for this series of switches. The switch is bidirectional.

We offer tight-bend-fiber version, which reduces the minimum bending radius from normal 15 mm to 7 mm. This feature enables smaller overall foot print.



Features

- Low Optical Distortions
- 8 Ports Integration
- High Isolation
- High Reliability
- Fail-Safe Latching
- Epoxy-Free Optical Path
- Low Cost

Performance Specifications

LB Dual 2x2 Bypass Switch	Min	Typical	Max	Unit
Wavelength	Single Band 1260-1360 or 1510-1620			nm
	Dual Band 1260-1360 and 1510-1620			
	Broad Band 1260-1620			
Insertion Loss ^{1,2}		0.7	1.0	dB
Wavelength Dependent Loss		0.15	0.4 (DW ³)	dB
Polarization Dependent Loss			0.1	dB
Return Loss ^{1,2}	55			dB
Cross Talk ¹	55			dB
Switching Time		4	10	ms
Repeatability			± 0.02	dB
Durability	10 ⁷			Cycles
Operating Optical Power		300	500*	mW
Operating Voltage	4.5	5	6	VDC
Operating Current		30	60	mA
Switching Type	Latching / Non-Latching			
Operating Temperature	-5 - 70			°C
Storage Temperature	-40 - 85			°C
Fiber Type	SFM-28			
Package Dimension	30.0L x 27.0W X 8.2H			mm

Notes:
¹ Within operating temperature and SOP.
² Excluding Connectors.
³ DW: Dual band and Broad Band.
 * Continuous operation, for pulse operation call

Applications

- Protection
- Instrumentation




Revised on 5/2/21
 (Click here for latest revision)


LightBend™ Dual 2x2 Bypass Single-Mode Fiber Optic Switch

Mechanical Dimensions (Unit: mm)

Latching Type

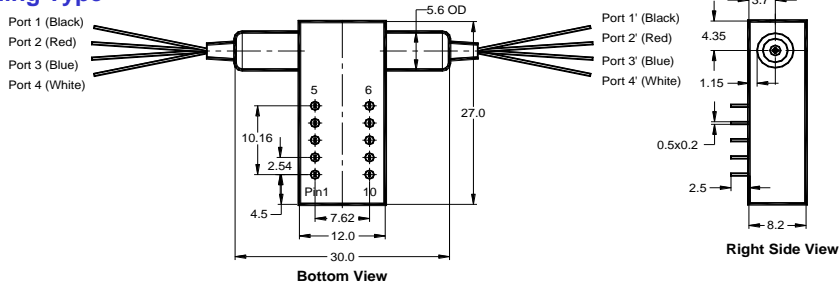

Non-Latching Type

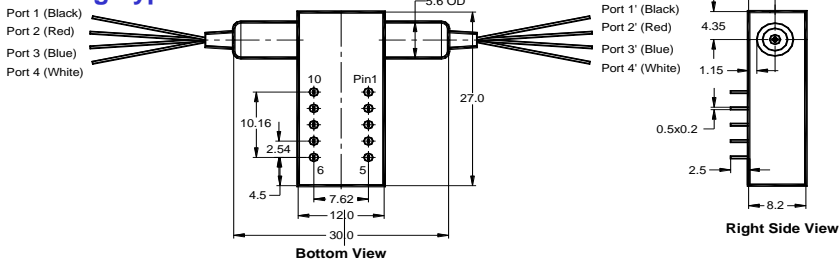

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Connector Configurations

The load is a resistive coil which is activated by applying 5V (draw ~ 40mA). Agiltron offers a computer control kit with TTL and USB interfaces and Windows™ GUI. We also offer RS232 interface as an option - please contact Agiltron sales.

Latching Type

Application Note: Applying a constant driving voltage increases stability. The switches can also be driven by a pulse mode using Agiltron recommended circuit for energy saving.


Optical Path	Electric Drive				Status Sensor			
	Pin 1	Pin 10	Pin 5	Pin 6	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Port 1→1', Port 2→2' Port 3→3', Port 4→4'	GND	5V Pulse	N/A	N/A	Close	Open	Open	Close
Port 1→3', Port 2→4'	5V Pulse	GND	N/A	N/A	Open	Close	Close	Open

Non-Latching Type

Optical Path	Electric Drive				Status Sensor			
	Pin 1	Pin 10	Pin 5	Pin 6	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Port 1→1', Port 2→2' Port 3→3', Port 4→4'	5V	GND	N/A	N/A	Open	Close	Close	Open
Port 1→3', Port 2→4'	No Power		N/A	N/A	Close	Open	Open	Close

LightBend™ Dual 2x2 Bypass Single-Mode Fiber Optic Switch

Functional Diagram

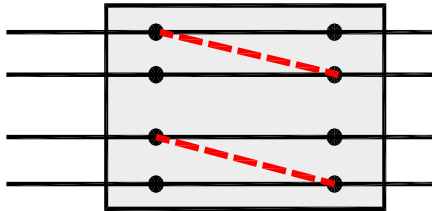

LB Dual 2x2 Bypass Switch

Ordering Information

LBSW-	4	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Type	Wavelength	Switch	Package	Fiber Type	Fiber Length	Connector			
Special=00	1060=1 C+L=2 1310=3 1410=4 1550=5 650=6 780=7 850=8 1310 & 1550=9 1260-1620=B Special=0	Latching Type Single Coil=2 Non-latch=3 Special=0	Standard=1 Special=0	SMF-28=1 Corning XB ¹ =2 Corning ZBL ² =3 Special=0	Bare fiber=1 900um loose tube=3 Special=0	0.25m=1 0.5m=2 1.0=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 Special=0		


1. Corning XB: Corning ClearCurve XB Bendable fiber
2. Corning ZBL: Corning ClearCurve ZBL Bendable fiber




LightBend™ Dual 2x2 Bypass Single-Mode Fiber Optic Switch

Application


Prepared with 4 duplex LC connectors and customized fiber length for convenient installation

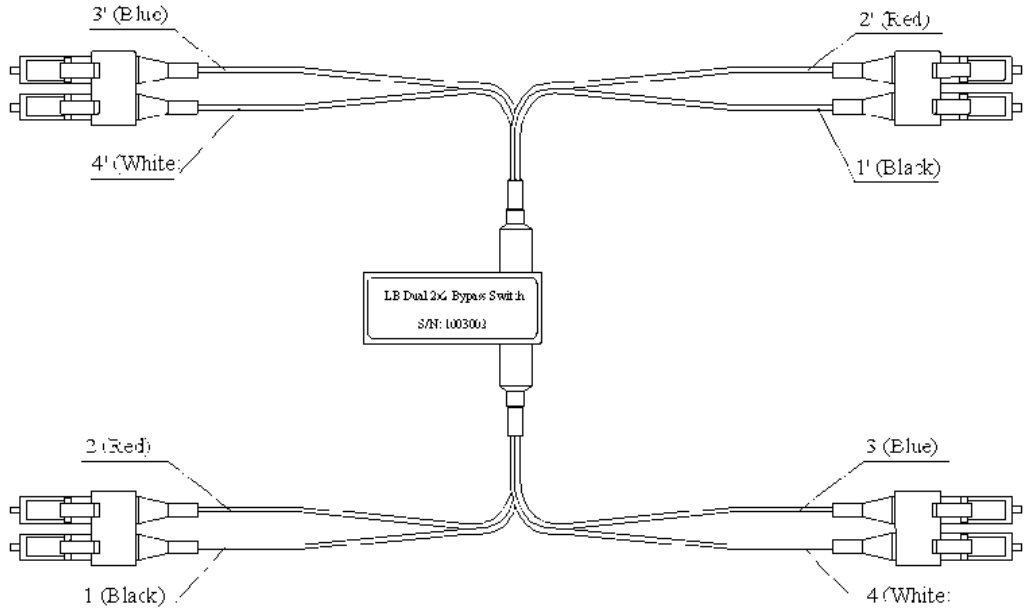

Normal Mode

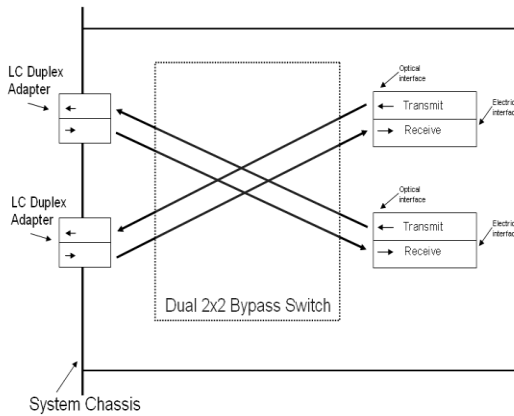

Bypass Mode

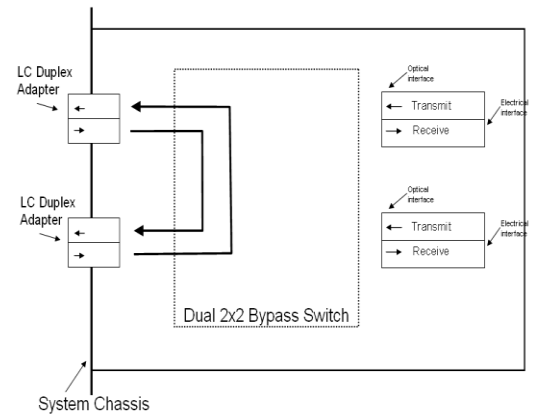

LightBend™ Dual 2x2 Bypass Single-Mode Fiber Optic Switch

Driver Reference Design

