


Free Space 1310nm/1550nm Optical Isolator

DATASHEET

BUY NOW

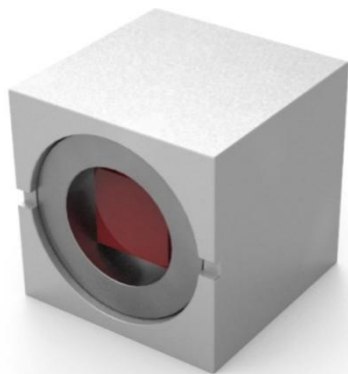

Features

- Low Insertion Loss
- High Isolation
- Compact Size
- High Reliability
- Versatile Package

Applications

- Optical Transmitter
- Laser Diode
- Instrumentation

The FSOI Series Free Space 1310nm/1550nm optical Isolator is a passive device that guides lights at 1310/1550 nm in the normal direction while minimizing back reflection and back scattering in the reverse direction.

With Agiltron's proprietary magnetic-optics technology and proven advanced Micro optics design, it features low insertion loss, high isolation, compact structure, high power handling, and high stability. Agiltron also provides customized designs to meet special applications.

Specifications

Parameter	Min	Typical	Max	Unit
Central Wavelength (λ_c)	1551		1563	nm
Insertion Loss ^[1]	P Grade	≤ 0.35		dB
	A Grade	≤ 0.5		
Clear Aperture		$\varnothing 1.1$		mm
Operating Temperature	-20		+85	$^{\circ}\text{C}$
Storage Temperature	-40		+85	$^{\circ}\text{C}$
Optical Power Handling		≤ 50		W/cm ²

* Other wavelength is available per customer's request

Note: For a polarized input light version, the isolation is optimized to block the light reflection of the same polarization. Although lights of other polarizations may also be blocked, the extinction may be poor. PM isolators can be specially made to block backward propagating lights of all polarizations. PM isolators can also be made with a light polarizing function.


Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 03/29/24

Free Space 1310nm/1550nm Optical Isolator

DATASHEET

Mechanical Dimensions (mm)

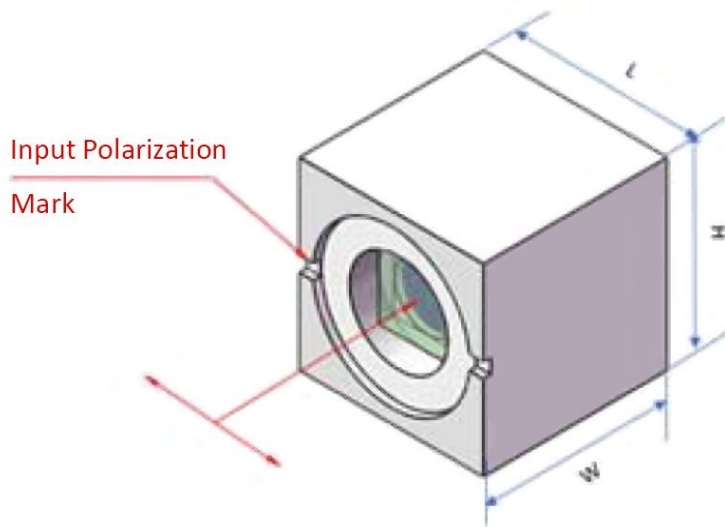

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number)

Prefix	Type	Wavelength	Grade	Package (unit: mm)			
MOFI-	Dual stage = fi	1550 = Y Special = 0	Grade A = 2 Special = 0	5x5x5=P Special = 0			

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.




Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

Free Space 1310nm/1550nm Optical Isolator

DATASHEET

Typical Wavelength Dependence for Single Stage

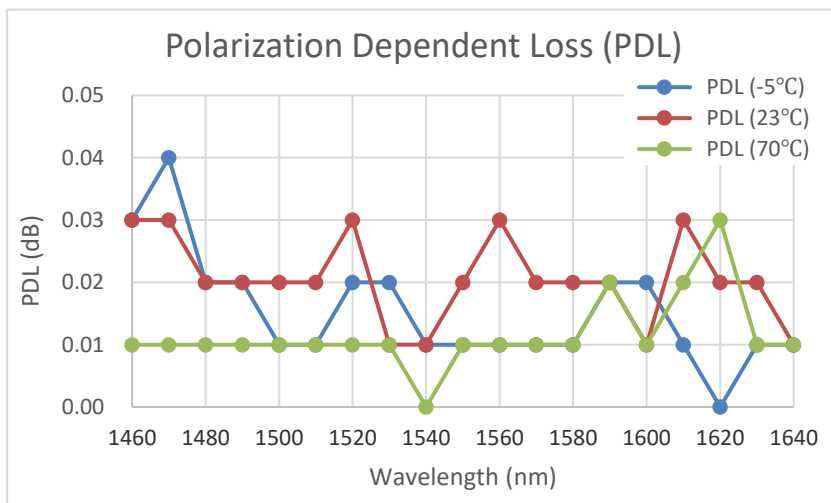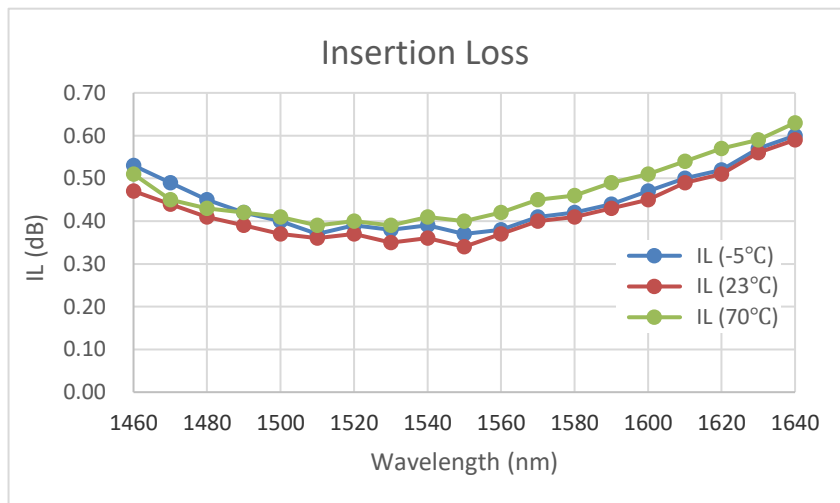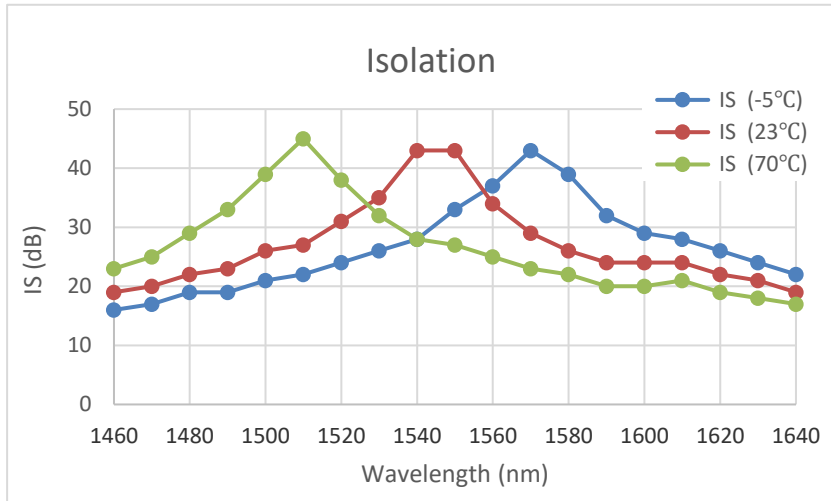

Free Space 1310nm/1550nm Optical Isolator

DATASHEET

Typical Wavelength Dependence for Dual Stage

