

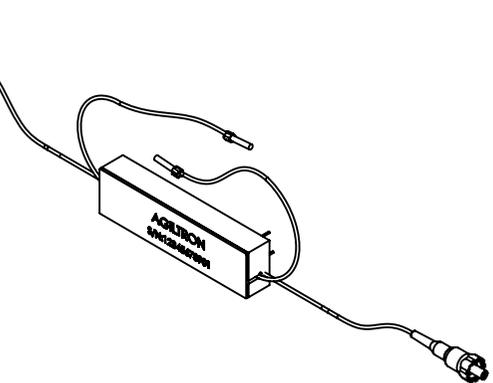
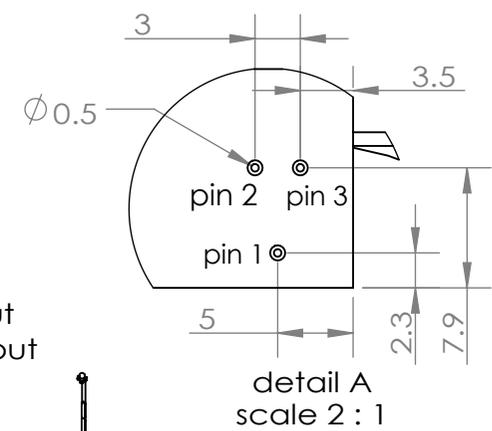
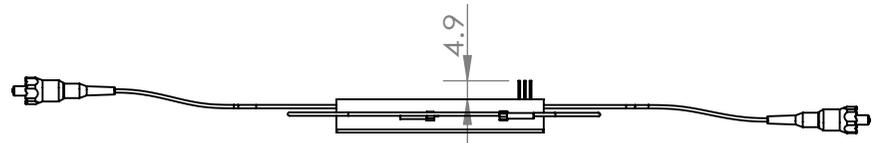
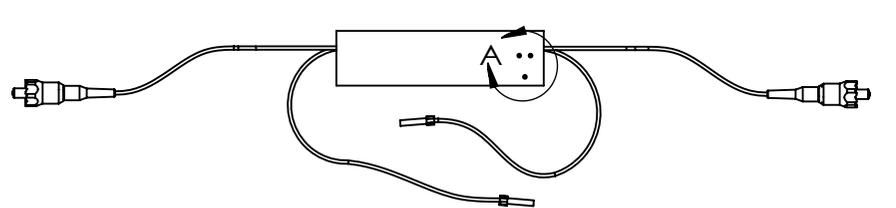


6 5 4 3 2 1

D

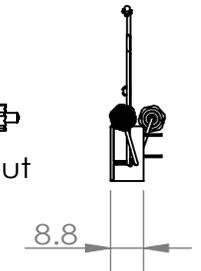

C

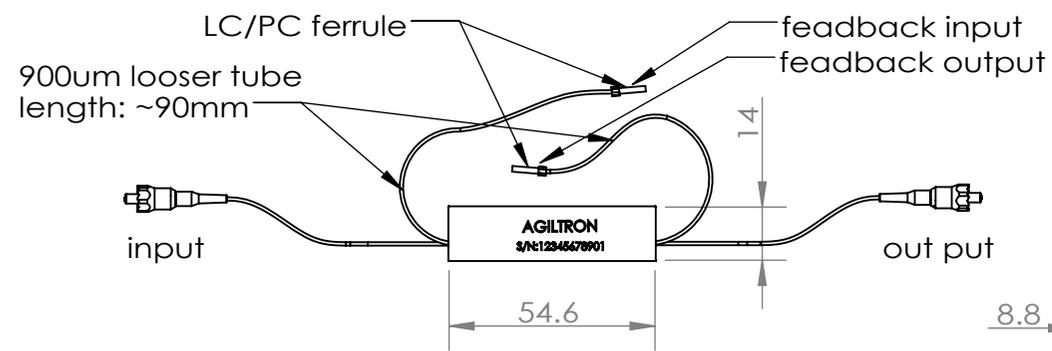

B

Pin diameter:  $\phi 0.5\text{mm}$   
 Recommended PCB solder hole diameter :  $\phi 1\text{mm}$   
 feedback fiber type & light source : need to check in the test report  
 feedback fiber length : ~90mm

Pin electrical control:

Pin number	Voltage(V)
Pin 1	20 ~ 80
Pin 2	(depends on fiber type)
Pin 3	0

UNLESS OTHERWISE SPECIFIED:			
1. DO NOT SCALE DRAWING. 2. INTERPRET PER ASME Y14.100M. 3. DIMENSIONS ARE IN METRIC. 4. SURFACE TEXTURE SHALL BE 125 5. REMOVE BURRS AND SHARP EDGES 6. DIMENSIONS APPLY BEFORE PLATING OR CONVERSION COATING. 7. PARENTHEICAL DATA IS FOR REFERENCE ONLY			
TOLERANCES: ON ALL HOLE DIAMETERS			
Under 1.0	+0.05 -0.01	25 THRU 50	+0.2 -0.1
1.0 THRU 5.0	+0.1 -0.025	>50	+0.25 -0.1
5.0 THRU 10.0	+0.15 -0.025		
10.0 THRU 25	+0.2 -0.025		
ON DECIMAL DIMENSIONS:	ON ANGULAR DIMENSIONS:		
.XXX +/-0.010	MACHINED +/-0°30'		
.XX +/-0.03	LOCATING +/-0°30'		
.X +/-0.1	FORMED +/-1°		
	CHANFERS +/-5°		

NAME	DATE	DO NOT SCALE DRAWING	REVISION
DRAWN			
CHK'D			
APP'VD			
MFG			
Q.A		TITLE: Piezo VOA Device	
MATERIAL:		DWG NO.	A4
WEIGHT:		SCALE: 1:2	SHEET 1 OF 1

A

6 5 4 3 2 1