

1550 Isolator / 1480nm WDM



thermal matching high reliability, compact Ø=4.2mm, 40dB isolation

DATASHEET

[Return to the Webpage](#)



The OIWD Series 3-port fiber optical isolator integrates a 1480 nm WDM with a 1550 nm isolator in a compact format of 4.2 mm diameter and 32 mm length. It guides single mode 1550 nm light in the forward direction while minimizing back reflection and back scattering in the reverse direction for both polarized and unpolarized light. A third port directs single mode 1480 nm light into one of the isolator ports for pumping an erbium-doped fiber. Leveraging Agiltron's advanced all-glass thermal matching micro-optics design, the isolator offers ultra-high reliability, high stability over a wide operating range (-45°C to 85°C), low insertion loss, dual-stage high isolation, and a compact structure. Automated production also makes it cost-effective. These Telcordia-qualified components are ideal for applications in fiber amplifier systems, pump laser diodes, and optical fiber sensors.

Features

- Low Insertion Loss
- High Isolation
- Low PDL
- High Reliability
- Low Cost

Applications

- Optical Fiber Amplifier
- Pump Laser Source
- Fiber Optic Sensor
- Instrumentation

Specifications

| Parameter | Min | Typical | Max | Unit |
|--|------|---------|------|------|
| Isolator Operation Wavelength | 1528 | | 1564 | nm |
| Isolator Channel Insertion Loss (-20 to 80 °C) | 0.6 | 0.7 | 1 | dB |
| Isolator Channel Isolation (-20 to 80 °C) | 35 | 40 | 45 | dB |
| Pump Channel Wavelength Range | 1450 | | 1495 | nm |
| Pump Channel Insertion Loss (-20 to 80 °C) | | 0.5 | 0.6 | dB |
| Pump Channel Isolation (-20 to 80 °C) | | | 15 | dB |
| Signal Channel Isolation (-20 to 80 °C) | | | 25 | dB |
| Polarization Dependent Loss | | | 0.2 | dB |
| Polarization Mode Dispersion ^[1] | | | 0.1 | ps |
| Return Loss (Input/Output) | 55 | | 0.1 | dB |
| Directivity | 55 | | | dB |
| Wavelength Dependent Loss | | | 0.45 | dB |
| Operating Temperature | -45 | | +80 | °C |
| Storage Temperature | -50 | | +85 | °C |
| Optical Power Handling | | | 500 | mW |

[1]. Special order for PMD ≤ 0.05ps with compensator

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 10/06/24


1550 Isolator / 1480nm WDM



thermal matching high reliability, compact $\varnothing=4.2\text{mm}$, 40dB isolation

DATASHEET

Mechanical Dimensions (mm)

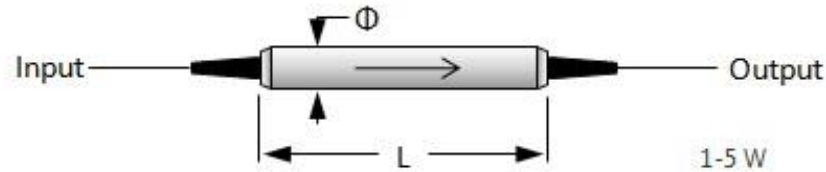


$\varnothing=4.2\text{mm}$ L=32mm


*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Configurations

Type F

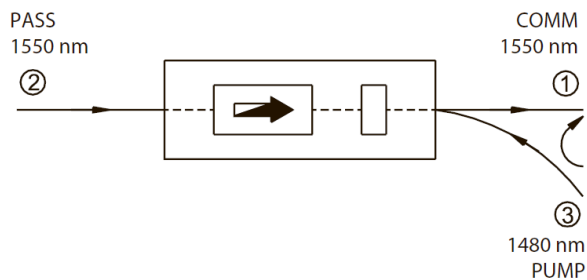

Type B

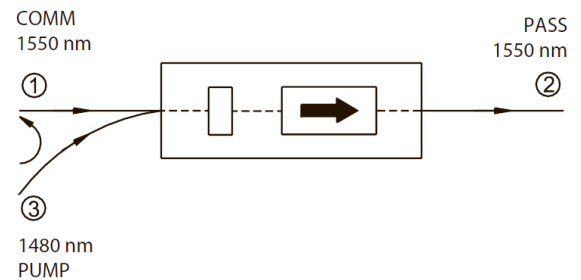

Ordering Information

| Prefix | Isolation | Isolator Wavelength | WDM Wavelength | Configuration | Fiber Type | Fiber Cover | Fiber Length | Connector |
|--------|------------------------------------|---|---------------------------|----------------|--|--|--|---|
| OIWD- | Single Stage = 1 Dual Stage = 2 | 1550nm = 5 1585nm = 6 Special = 0 | 1480nm = 4 Special = 0 | F = F B = B | SM28 = 1 SM28e = 2 PM1310 = 3 Special = 0 | Bare Fiber = 1 900 μm Tube = 2 | 0.25m = 1 0.5m = 2 1.0m = 3 1.5m = 4 2.0m = 5 Special = 0 | None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0 |

1550 Isolator / 1480nm WDM




thermal matching high reliability, compact $\varnothing=4.2\text{mm}$, 40dB isolation

DATASHEET

Function Diagram

Isolation vs Wavelength

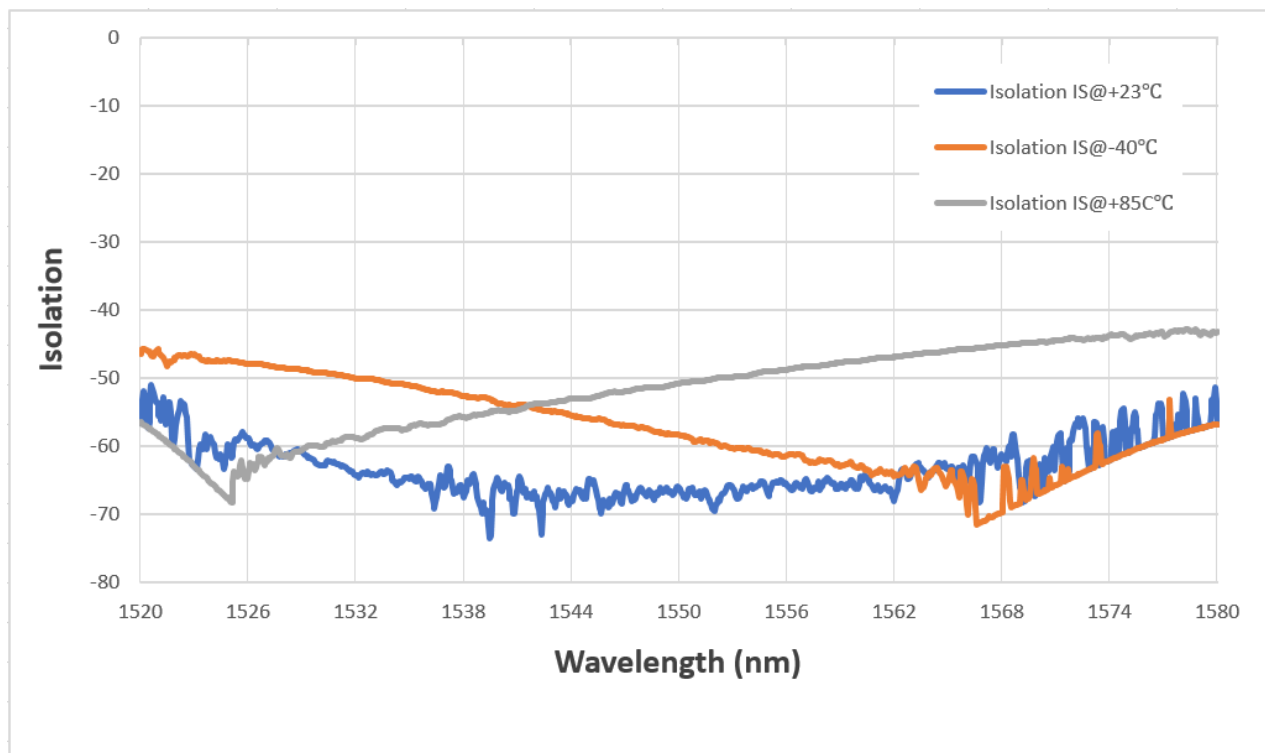




1550 Isolator / 1480nm WDM



thermal matching high reliability, compact $\varnothing=4.2\text{mm}$, 40dB isolation

DATASHEET

Typical Wavelength Dependence for Single Stage

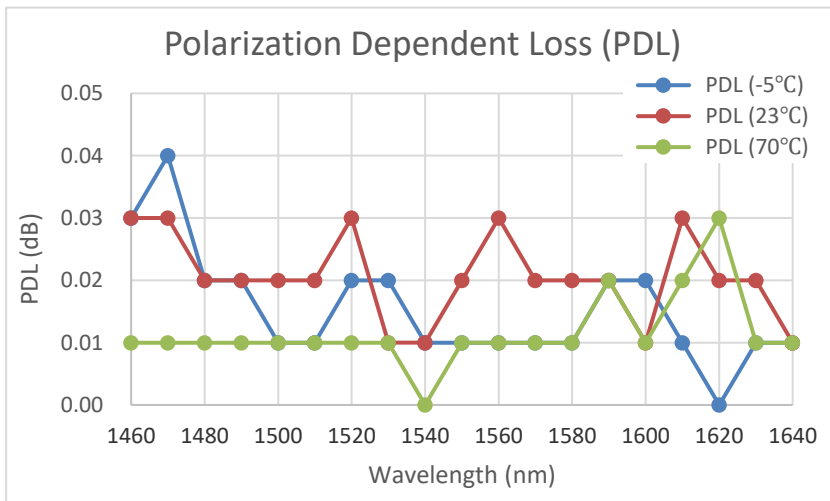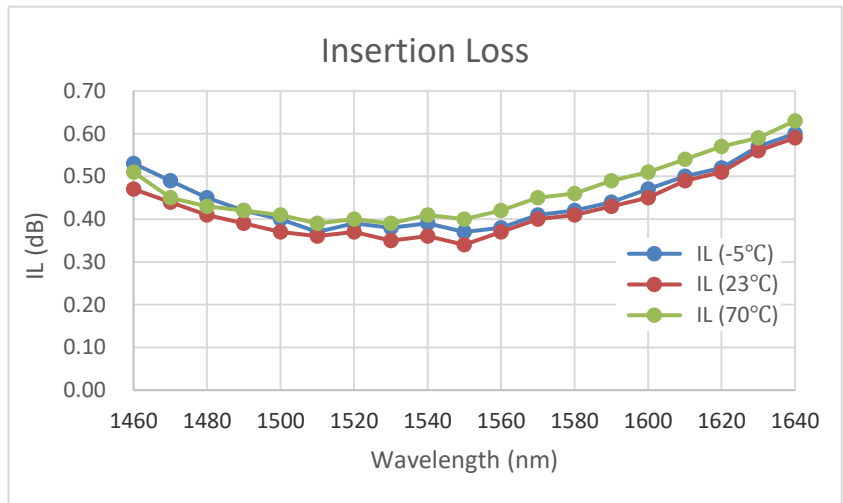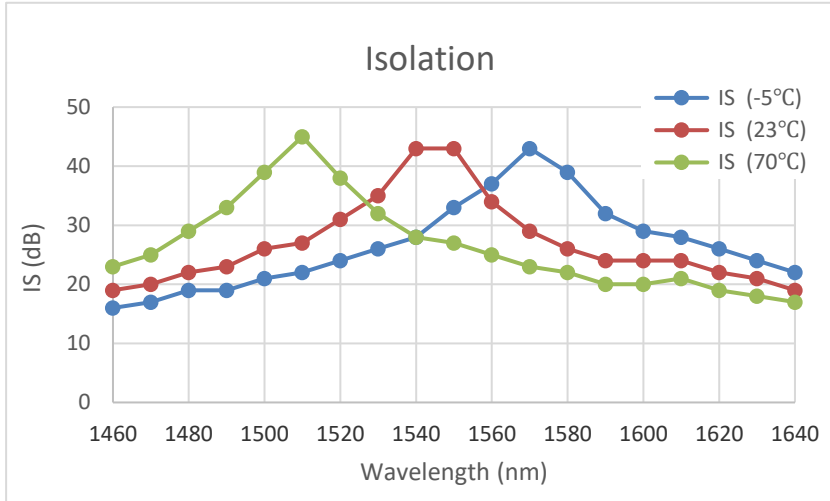

1550 Isolator / 1480nm WDM



thermal matching high reliability, compact $\varnothing=4.2\text{mm}$, 40dB isolation

DATASHEET

Typical Wavelength Dependence for Dual Stage

