

Fiber Optical Phase Modulator

200MHz, 1064 nm



DATASHEET

BUY NOW



The LNPM is a high-performance, fiber-coupled phase modulator with operating frequencies ranging from DC to 200MHz, covering the 1030-1070 wavelength band. It is constructed using optical waveguides on high efficient X-cut LiNbO₃ material and is coupled with polarization-maintaining input and output fibers.

Features

- X-cut LiNaO3 Waveguide
- High Polarization Extinction Ratio
- High Optical Power Handling
- PM Input & Output

Applications

- Coherent Communications
- Optical Chirping
- Optical Sensing
- FM Spectroscopy
- Frequency Shifting
- Laser Linewidth Broadening

Specifications

Parameter	Min	Typical	Max	Unit
Input Optical Power			300	mW
Operating Wavelength	1030		1070	nm
Insertion Loss		3	3.5	dB
Polarization Extinction Ratio	20			dB
Optical Return Loss	45			dB
S21 Bandwidth		100	200	GHz
S11 Return Loss	-9			dB
RF V _{rt} @ 10 KHz		1.3	1.6	V
RF Input Power			10	V _{pp}
Impedance		High Z		Ω
Operating Temperature	-25		75	° C
Storage Temperature	-50		80	° C
Operating Humidity	0		90	%

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 09/24/24



Fiber Optical Phase Modulator

200MHz, 1064 nm



DATASHEET

Dimensions (mm)

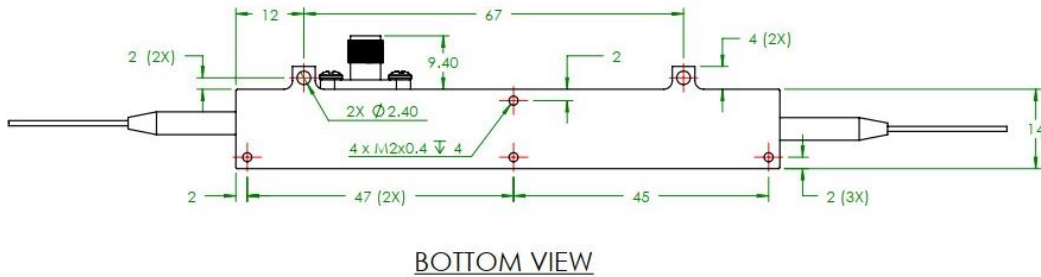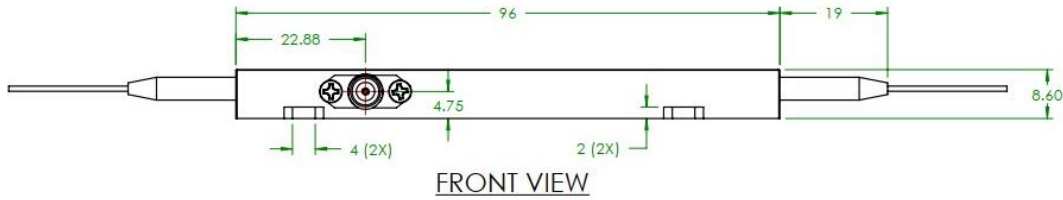

Unit: mm

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Connection

PIN	Symbol	Description
1	-	N/A
2	-	N/A
3	-	N/A
4	-	N/A
5	-	N/A
6	-	N/A
7	-	N/A
RF	RF connector*	2.92 mm female

Ordering Information

Prefix	Configuration	Wavelength	Frequency	Input Fiber	Output Fiber	Cable	Fiber Length	Connector
LNPM-	Phase = 2	1060nm = 1	200MHz = 1	PM980 = 9	PM980 = 9	0.9mm Tube = 1	0.5m = 1 Special = 0	FC/APC = 3 FC/PC = 2 Special = 0

Fiber Optical Phase Modulator

200MHz, 1064 nm



DATASHEET |

TYPICAL EO RESPONSE

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.